




 **Huade**



Hydraulic valves

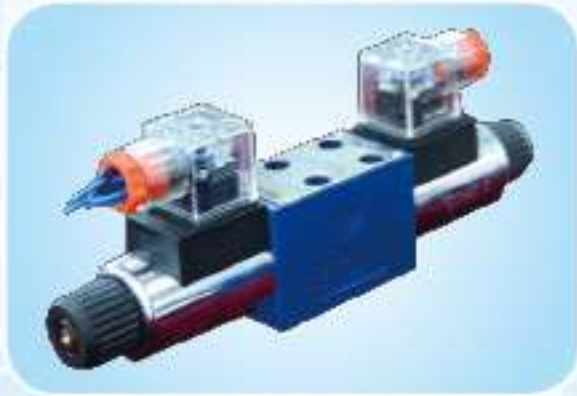

Directional Valves



Catalogue



BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.

CONTENTS

Directional Valves

No.	Name	Type	Size	Pressure max.(MPa)	Page
1	Check valve	S	6~30	31.5	1
2	* Check valve	S...P...1B/	10, 20, 30	31.5	7
3	Check valve	RVP	6~40	31.5	11
4	* Check valve with damp	SZ8A	8	31.5	15
5	* Check valve cartridge	M-SR...KE...10B/	8~30	31.5	19
6	Check valve sandwich plate	Z1S...30B	6, 10	31.5	25
7	Pilot operated Check valve	Z2S	6, 10, 16, 22	31.5	29
8	* Pilot operated Check valve (New Series)	Z2S	6, 10, 16, 22	31.5	35
9	Pilot operated check valves	SV/SL...30B	10~30	31.5	41
	* Pilot operated check valves (New Series)	SV/SL...40B/	10~32	31.5	47
10	Directional Control Valves, Manual Operation	WMD	6, 10	31.5	53
	Directional control valves with hand lever	WMM	6, 10, 16, 25	35	59
11	* Directional control valves with hand lever (New Series)	WMM...30B/	10	31.5	71
12	* Directional control valves with hand lever	B-H10	10	25	75
13	Directional control valves Mechanical Operation	WMU/R	6, 10	31.5	79
14	* Directional control valves, electrically operated	WE4	4	21	85
	Directional control valves, electrically operated	WE5	5	25	89
	Directional control valves, electrically operated	WE6...50B/...	6	35	95



CONTENTS

Directional Valves

No.	Name	Type	Size	Pressure max.(MPa)	Page
14	Directional control valves, electrically operated	WE6...61B/...	6	31.5	103
	Directional control valves, electrically operated	WE10...20B/	10	31.5	109
	Directional control valves, electrically operated	WE10...30B/	10	31.5	117
	* Directional control valves, electrically operated	5-WE10	10	31.5	125
15	Directional control valves, Hydraulically operated	WH	6, 10	31.5	131
16	* Poppet directional valves, solenoid actuated	M-SEW6	6	42/63	139
	* Poppet directional valves, solenoid actuated	M-SEW10	10	42/63	149
17	Directional Valves Electro-hydraulically operated	WEH.../WH... ^{20B} / _{50B} /...	10,16,25,32	28/35	159
	* Directional Valves Electro-hydraulically operated (New Series)	WEH.../WH... ^{40B} / _{60B} /...	10,16,25,32	35	183
18	Subplates	—	—	—	204

* ** : New products, for ordering, please consult us, telephone: +86-10-69083290



Other Huade Hydraulics Catalogues for Valves

- Pressure Valves
- Flow Control Valves
- Proportional Valves
- Cartridge Valves

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Check valve type S			RE 20375/12.2004
	Size 6 to 30	up to 31.5 MPa	up to 400L/min	Replaces: RE 20375/05.2001



Features:

- For threaded connection (screw-in connection)
- Subplate mounting
- Leakage-free closure in one direction
- Various cracking pressures, optional (see ordering details)




Function,section,symbols

The check valve type S has the task of, preferably closing a flow leak free in one direction and to permit free flow in the opposite direction. The stroke of the poppet, which is guided on its outside diameter, is limited by a mechanical stop. The built-in compression spring supports the closing movement. Furthermore the compression spring holds the poppet in the closed position even when there is no flow through the valve.

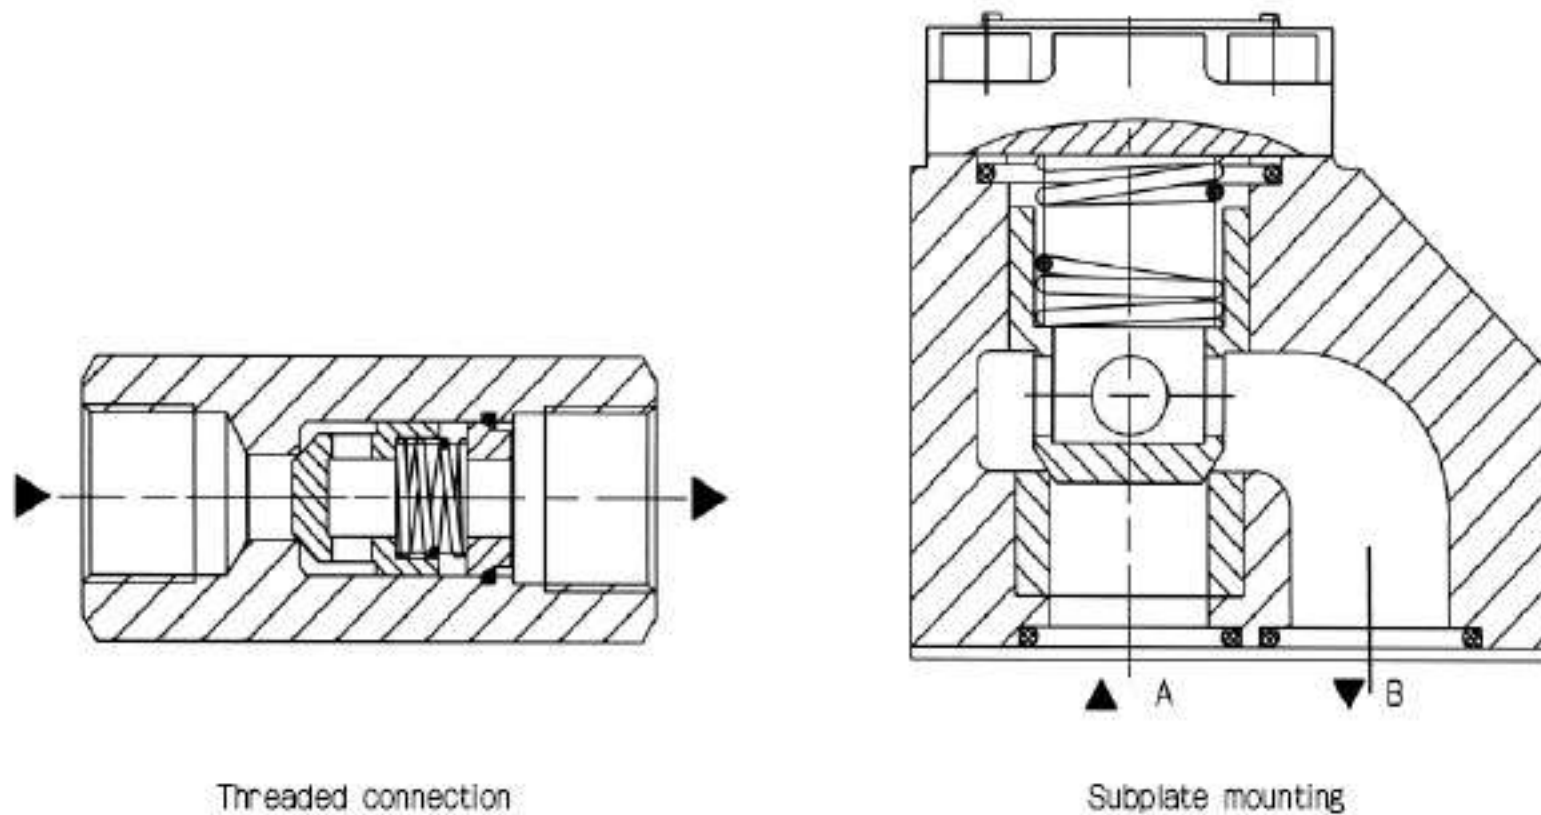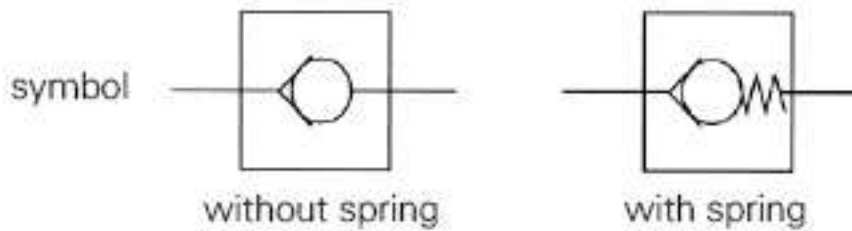

Ordering details

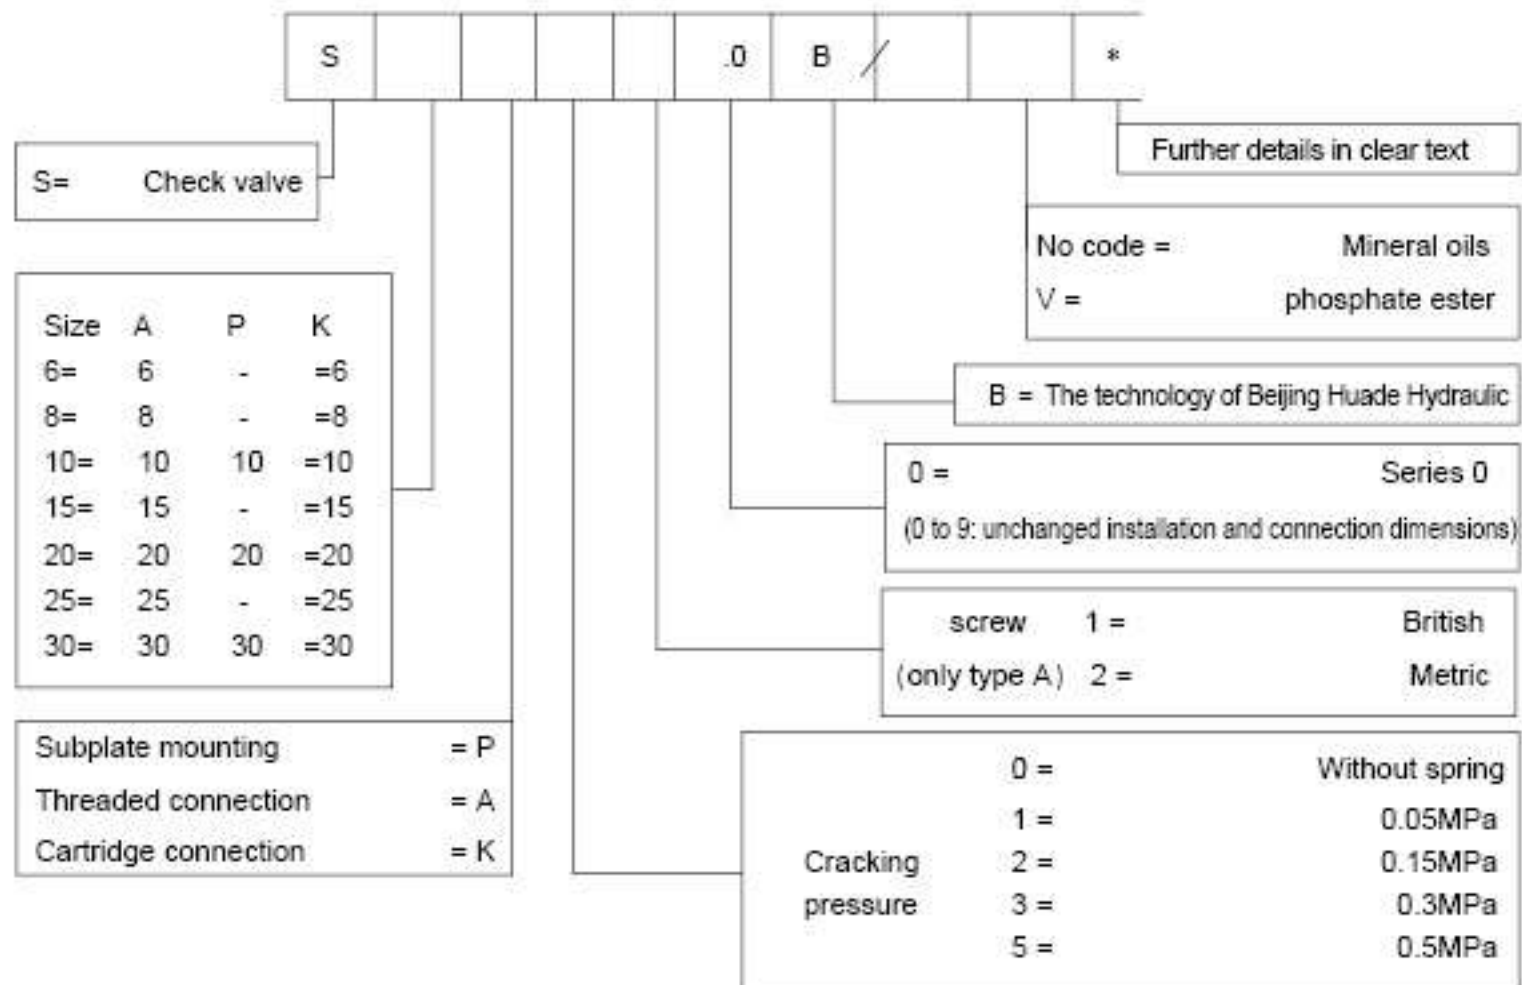

The model of check valve cartridge

A straight-through cartridge

	K1	K2	K3
6	301889	301896	301903
8	301890	301897	301904
10	301891	301898	301905
15	301892	301899	301906
20	301893	301900	301907
25	301894	301901	301908
30	301895	301902	301909

A straight-angled cartridge








	K1	K2	K3
6	301910	301917	301924
8	317701	317702	317703
10	301912	301919	301926
15	317704	317705	317706
20	301914	301921	301928
25	301915	301922	301929
30	301916	301923	301930

For example, Booked valve inserted of size 6 with opening pressure 0.05MPa, the ordering code is: S6K1-301889

Technical data (For applications outside these parameters, please consult us!)

Pressure fluid		mineral oils or phosphate ester
Pressure fluid - temperature range	(°C)	-30~+80
Viscosity range	(mm ² /s)	2.8~500
Max.operating pressure	(MPa)	31.5
Cracking pressure	(MPa)	See characteristic curves below
Maximum flow	(L/min)	

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

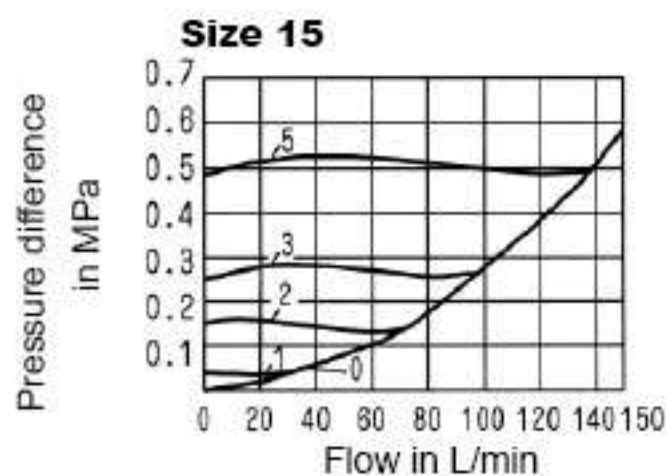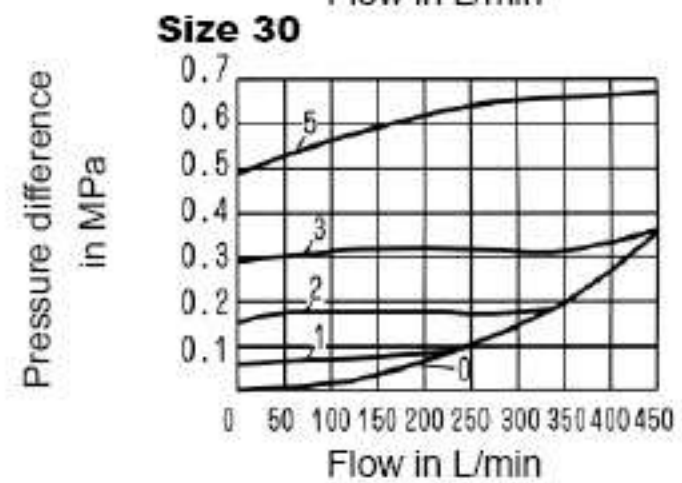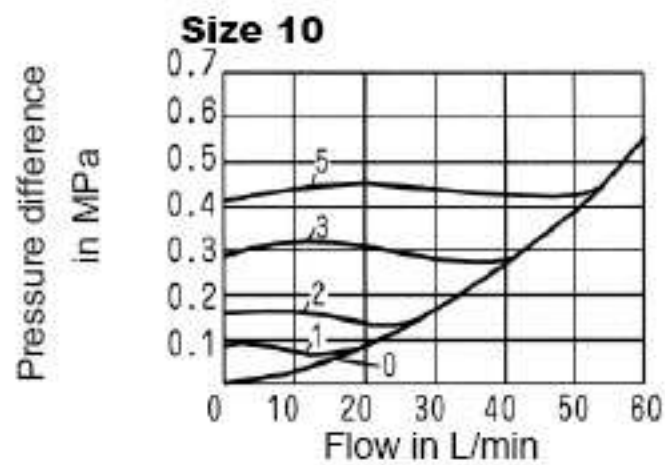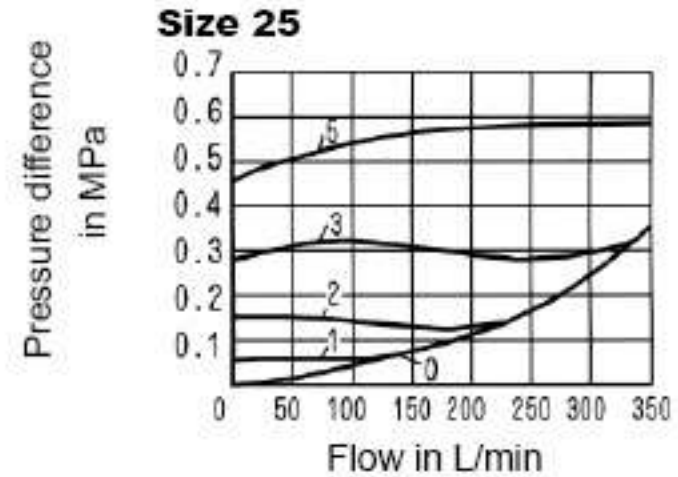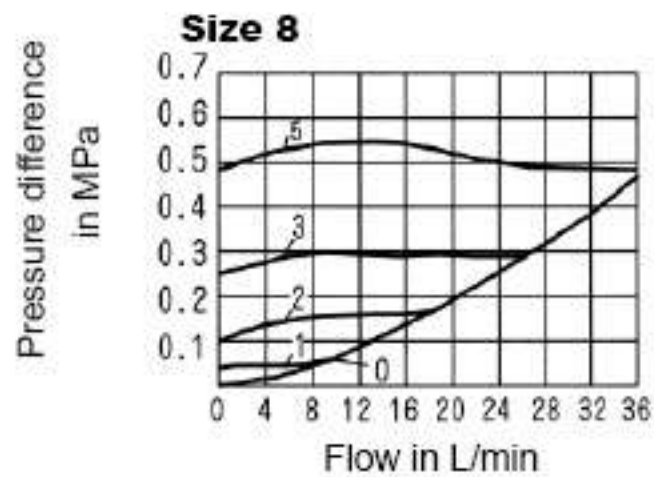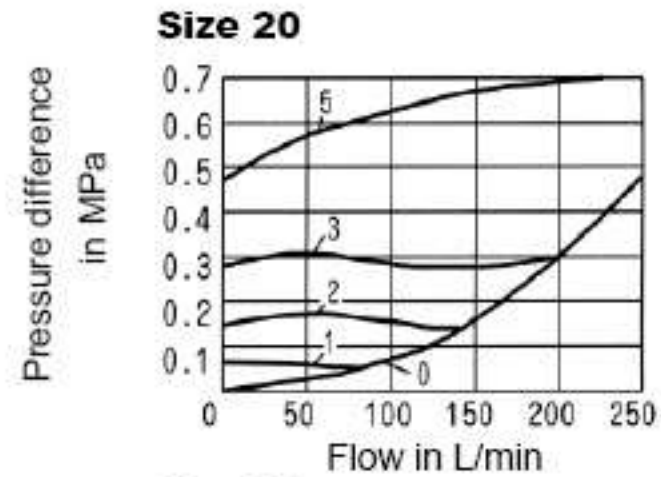
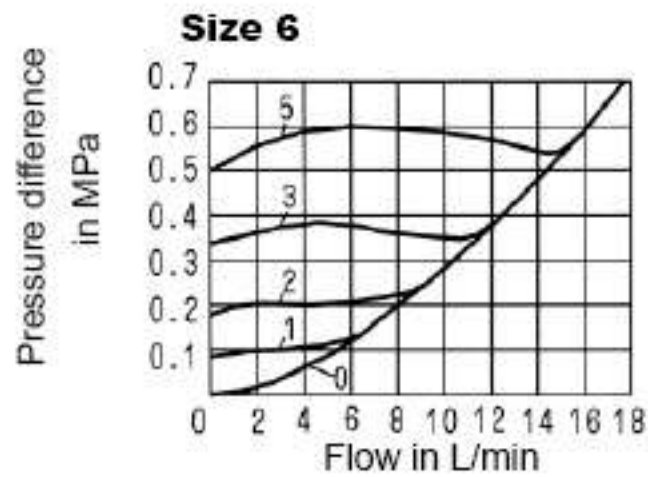


Pressure difference Δp related to the flow q_v at the cracking pressure

Unit dimensions

(Dimensions in mm)



Threaded connection:

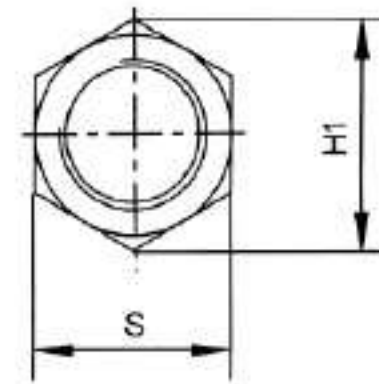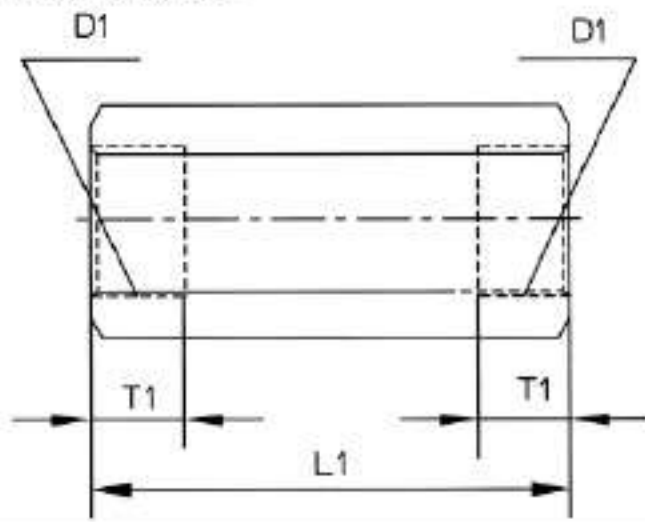

Size	6	8	10	15	20	25	30
D1	G1/4"	G3/8"	G1/2"	G3/4"	G1"	G1 1/4"	G1 1/2"
	M14X1.5	M18X1.5	M22X1.5	M27X2	M33X2	M42X2	M48X2
H1	22	28	34.5	41.5	53	69	75
L1	58	58	72	85	98	120	132
T1	12	12	14	16	18	20	22
S	19	24	30	36	46	60	65
Weight (K g)	0.1	0.2	0.3	0.5	1	2	2.5

Valve cartridge

Straight-angled check valve

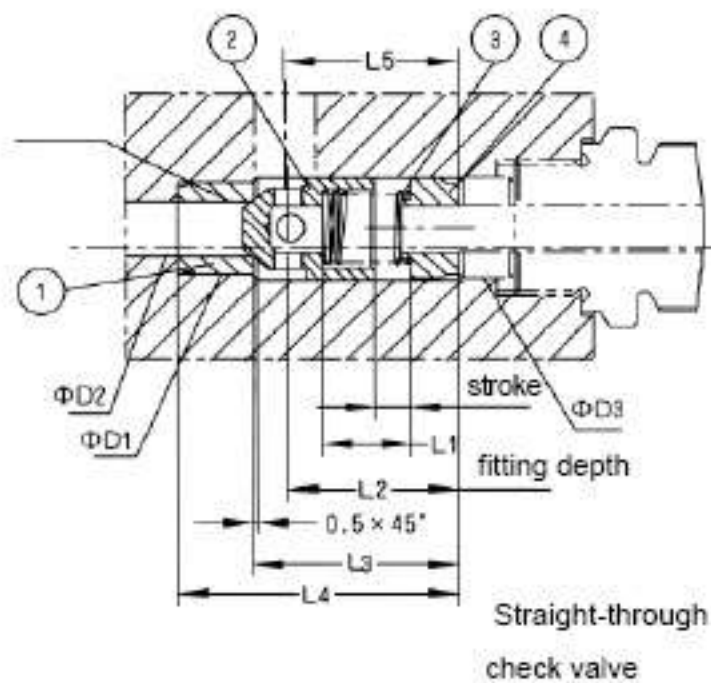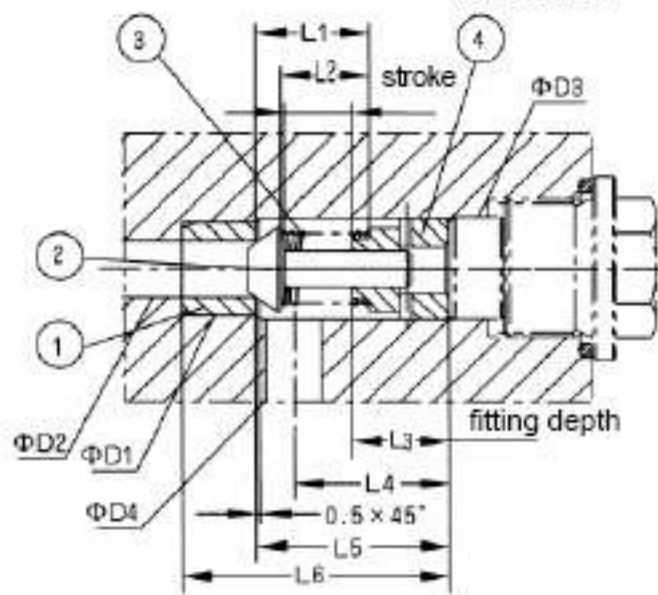


N G	6	8	10	15	20	25	30
Φ D1H7	10	13	17	22	28	36	42
Φ D2	6	8	10	15	20	25	30
Φ D3H8	11	14	18	24	30	38	44
Φ D4	6	8	10	15	20	25	30
Journey	4	4	4	5	5	7	7
L1	11.2	11.9	14.3	18	18.8	28.5	28.5
L2	9.5	9.5	11.5	14.5	16	24.5	25
L3	10	16	16	18	23	31	37
L4	16.5	21.5	23.5	25.5	30	43	47.5
L5	20.5	26.5	29.5	34	40.5	57.5	63.5
L6	28.5	36.5	39.5	46	55.5	75.5	83.5
Weight	0.05Kg	0.05Kg	0.05Kg	0.1Kg	0.2Kg	0.25Kg	0.3Kg

NG	6	8	10	15	20	25	30
Φ D1H7	10	13	17	22	28	36	42
Φ D2	6	8	10	15	20	25	30
Φ D3H8	11	14	18	24	30	38	44
Journey	4	4	4	5	5	7	7
L1	9.5	9.5	11.5	14.5	16	24.5	25
L2	19	18	21	27	29	29	42
L3	21.8	22.8	28.8	36.4	44	55	63
L4	29.8	32.8	38.8	48.4	59	73	83
L5	18	18	23	28	33	41	47
Weight	0.05Kg	0.05Kg	0.05Kg	0.1Kg	0.2Kg	0.25Kg	0.3Kg


Unit Dimensions

(Dimensions in mm)

Subplate mounting:

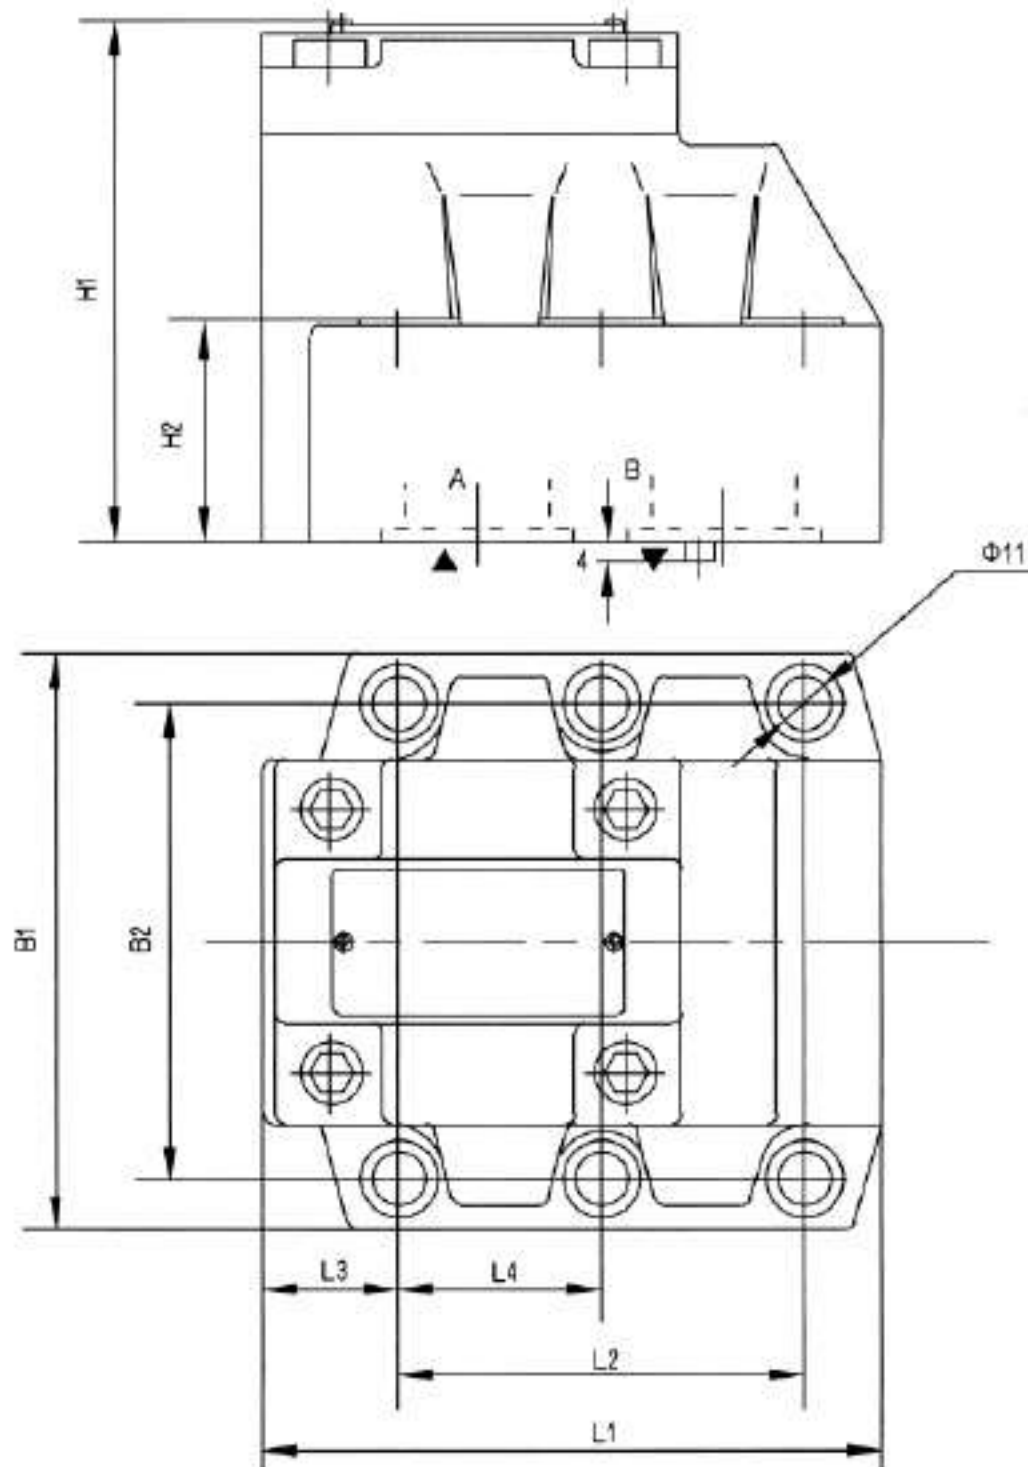

Required surface finish of mating piece

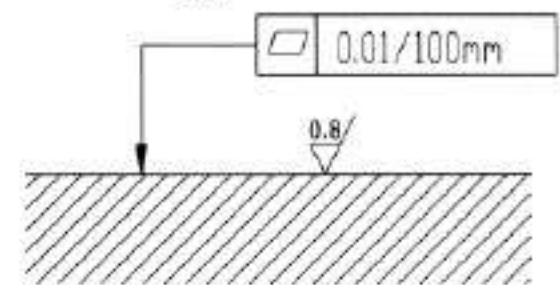

Size	The valve fixing screws (GB/T70.1-2000)	O-ring for ports A,B
10	4-M10 × 40 -10.9	17.12 × 2.62
20	4-M10 × 50 -10.9	28.17 × 3.53
30	4-M10 × 70-10.9	34.52 × 3.53

Subplate, NG10,

G460/01 G460/02
G461/01 G461/02

NG20,

G412/01 G412/02
G413/01 G413/02

NG30,

G414/01 G414/02
G415/01 G415/02

must be ordered separately, see page 204

NG	B1	B2	L1	L2	L3	L4	H1	H2
10	85	66.7	78	42.9	17.8	-	66	21
20	102	79.4	101	60.3	23	-	93.5	31.5
30	120	96.8	128	84.2	28	42.1	106.5	46

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Check valve type S...P...1B/			RE20100/12.2004
	Sizes 10 20 30	up to 31.5 MPa	up to 400 L/min	

Features:



- Leakage-free closure in one direction
- 5 cracking pressure
- Subplate mouting




Function,section,symbol

The check valve type S has the task of, preferably closing a flow leakfree in one direction and to permit free flow in the opposite direction.It basically comprises of the housing (1), poppet (2) and the compression spring (3).

The stroke of the poppet (2), which is guided on its outside diameter,is limited by a mechanical stop. The built-in compression spring (3)supports the closing movement. Furthermore the compression spring (3) holds the poppet (2) in the closed position even when there is no flow through the valve.

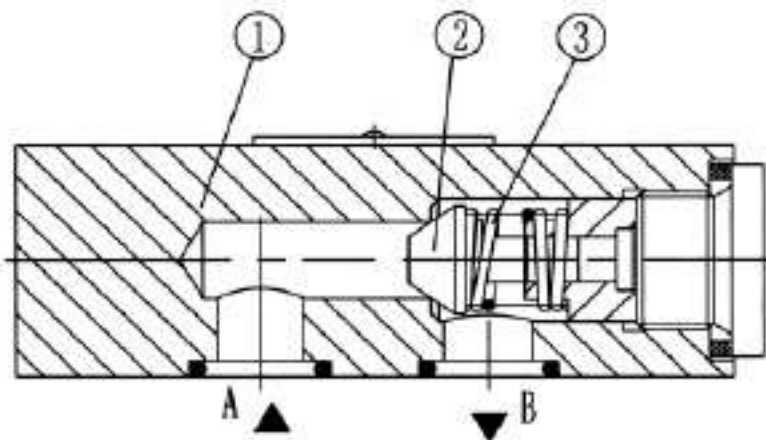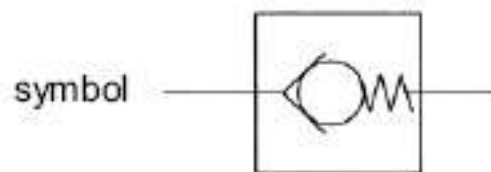

Type S10P

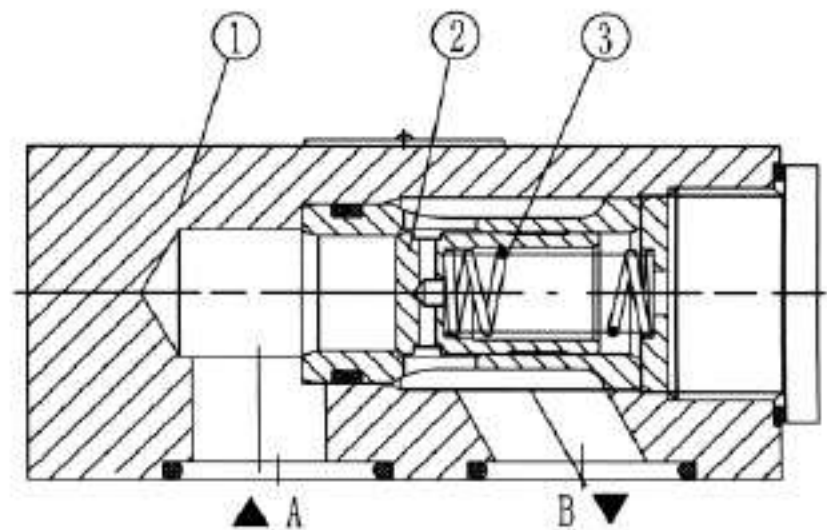

Type S20, 30 P

Ordering details

S		P		1	B	/	*
---	--	---	--	---	---	---	---

Check valve =S

Size	
10	=10
20	=20
30	=30

Subplate mouting = P

Cracking pressure 0.02 MPa	= 1
Cracking pressure 0.05 MPa	= 2
Cracking pressure 0.15 MPa	= 3
Cracking pressure 0.3 MPa	= 4
Cracking pressure 0.5 MPa	= 5

Further details in clear text

No code = Mineral oils
V = phosphate ester

B = The technology of Beijing Huade Hydraulic


1= Series 1
(1 to 9: unchanged installation and connection dimensions)

Technical data


Operating fluid		mineral oils or phosphate ester
Operating pressure	(MPa)	up to 31.5
Viscosity range	(mm ² /s)	2.8~500
Maximum flow	(L/min)	See curves
Cracking pressure	(MPa)	
Pressure fluid - temperature range	(°C)	-30--+80
Degree of contamination		maximum permissible degree of contamination of the pressure fluid is to NAS 1638 class 9. We, therefore, recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.

Characteristic curves (measured at $v = 41 \text{ mm}^2 / \text{s}$ and $t = 50 \text{ }^\circ\text{C}$)


size10

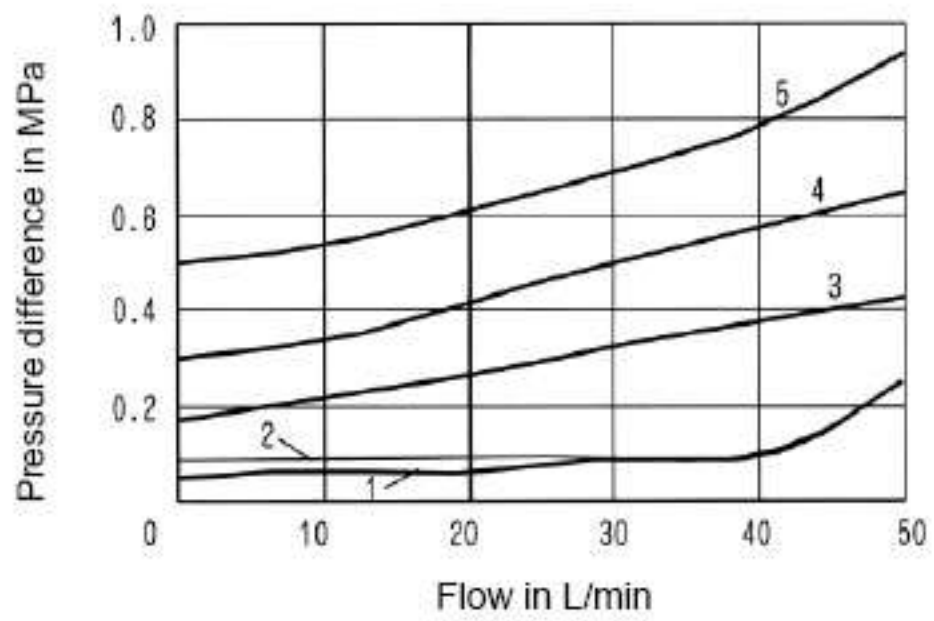


size20

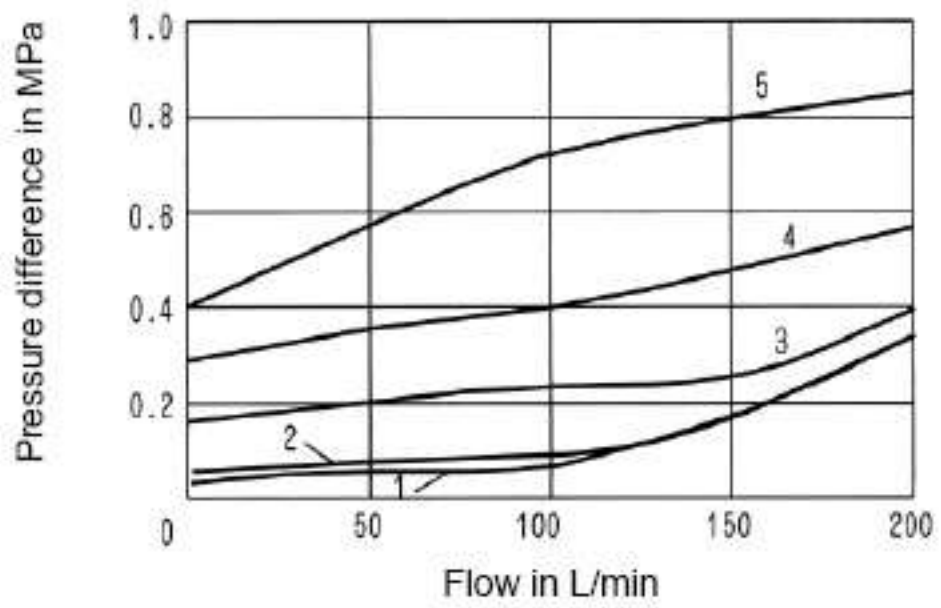



size30

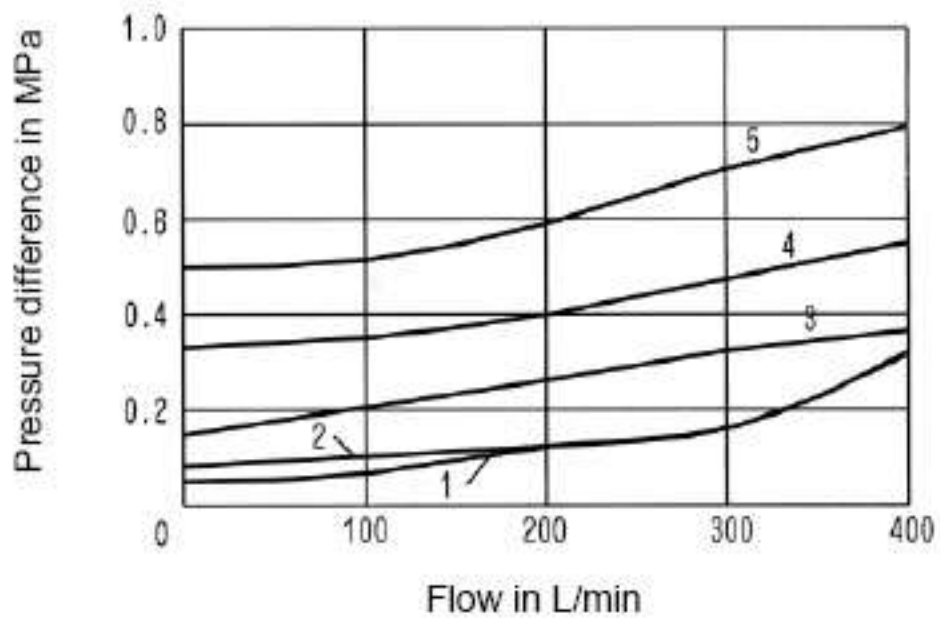


S 10 P

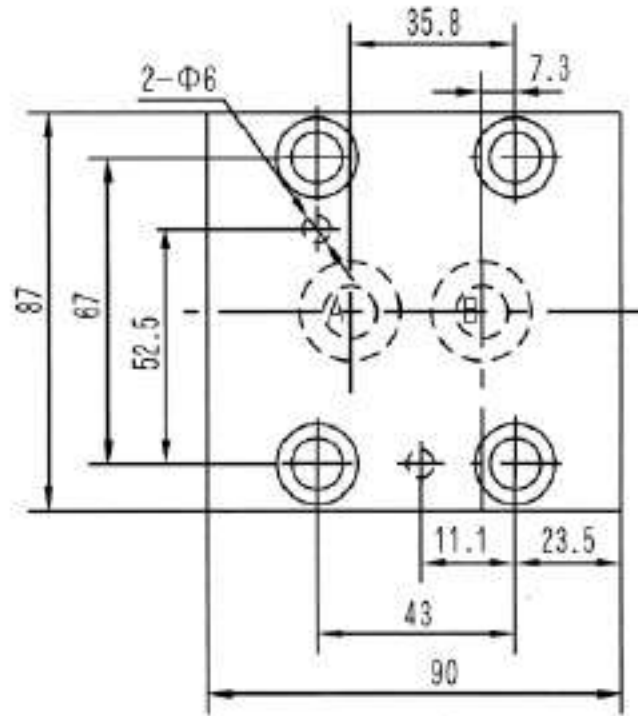

S 20.30 P

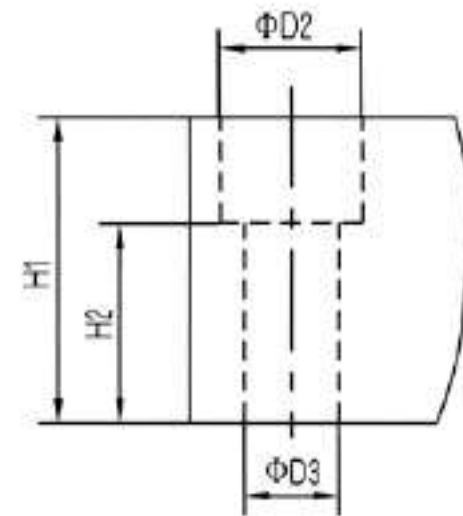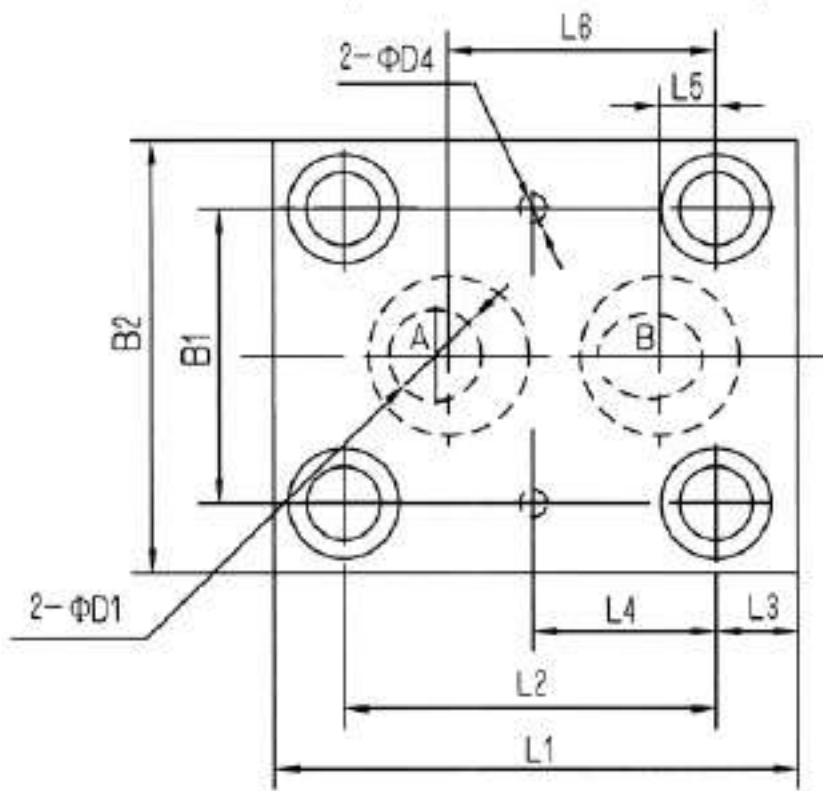

Required surface finish of mating piece

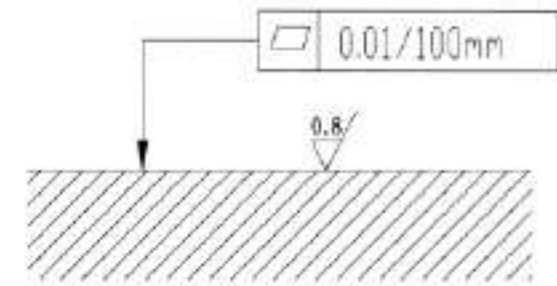

Size	Valve fixing screws (GB/T70.1-2000)	O-ring for ports A, B
10	4-M10X35-10.9	17.12X2.62
20	4-M14X55-10.9	28.17X3.53
30	4-M18X60-10.9	34.52X3.53

Size	B1	B2	L1	L2	L3	L4	L5	L6	H1	H2	Φ D1	Φ D2	Φ D3	Φ D4
20	65	95	114	81	18	40.5	13	59	52	35	20	24	16	6
30	92	130	154	92	43.5	46	20.5	71.5	70	36	28	29	20	6

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	check valve Type Rvp			RE 20400/12.2004
	Size 6 to 40	up to 31.5 MPa	up to 600L/min	Replaces: RE 20400/05.2001

Features:



- Subplate connection
- Leakage-free closure in one direction



Description,section,symbol

The check valve type RVP has the task of, preferably closing a flow leakfree in one direction and to permit free flow in the opposite direction. It basically comprises of the housing (1), poppet (2) compression spring (3),and spring seat(4).

The stroke of the poppet (2), which is guided on its outside diameter, is limited by a mechanical stop. The built-in compression spring (3) supports the closing movement. Furthermore the compression spring (3) holds the poppet (2) in the closed position even when there is no flow through the valve.

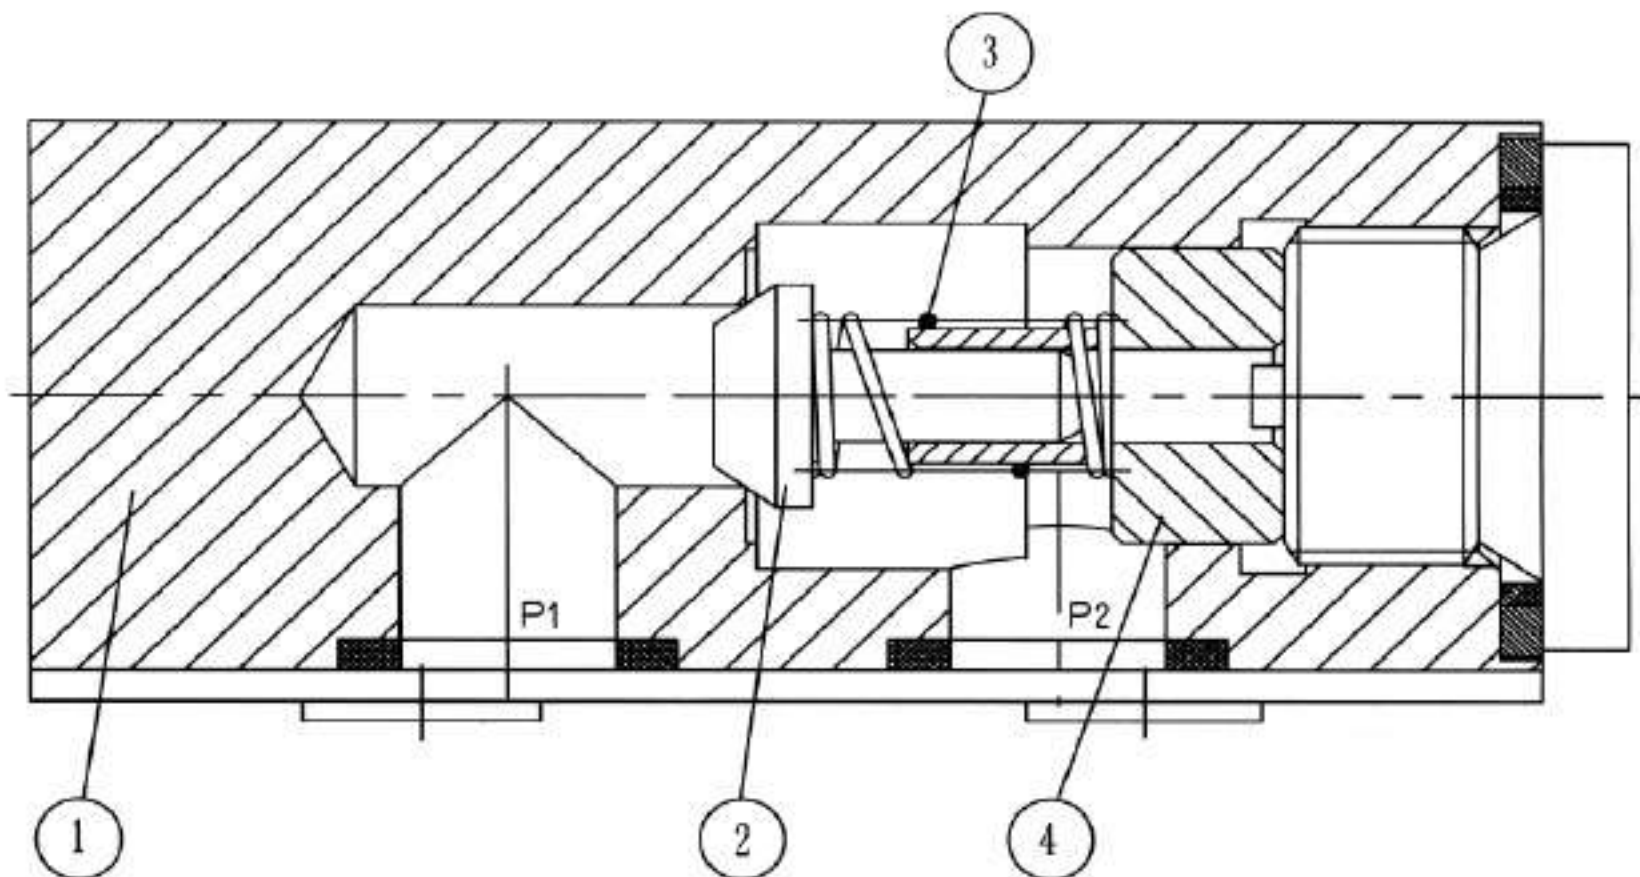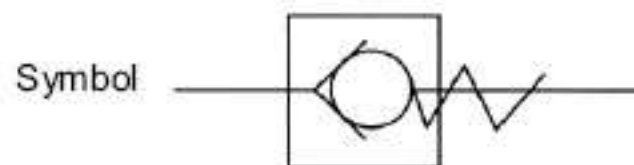

1. Housing 2.Poppet 3. Spring 4. Spring seat

Ordering details

	RV	P		10	B		*
--	----	---	--	----	---	--	---

Check valve

Subplate mounting =P

Size	
6	=6
8	=8
10	=10
12	=12
16	=16
20	=20
25	=25
30	=30
40	=40

Further details in clear text

No code = Mineral oils
V = phosphate ester

B = The technology of Beijing Huade Hydraulic


10= series 10 to 19
(10 to 19: unchanged installation and connection dimensions)

Technical data

Size		6	8	10	12	16	20	25	30	40	
Operating pressure, max.	(MPa)	31.5									
Opening pressure	(MPa)	0.05									
Pressure fluid		mineral oils or phosphate ester									
Pressure fluid temperature range	(°C)	- 30 to + 80									
Viscosity range	(mm ² /s)	2.8 to 500									
Fixing position		optional									



Characteristic curves (measured at $\nu = 41 \text{ mm}^2/\text{s}$ and temperature $t = 50^\circ\text{C}$)

Direction of flow: P1 to P2 The relationship between pressure differential Δp and flow Q

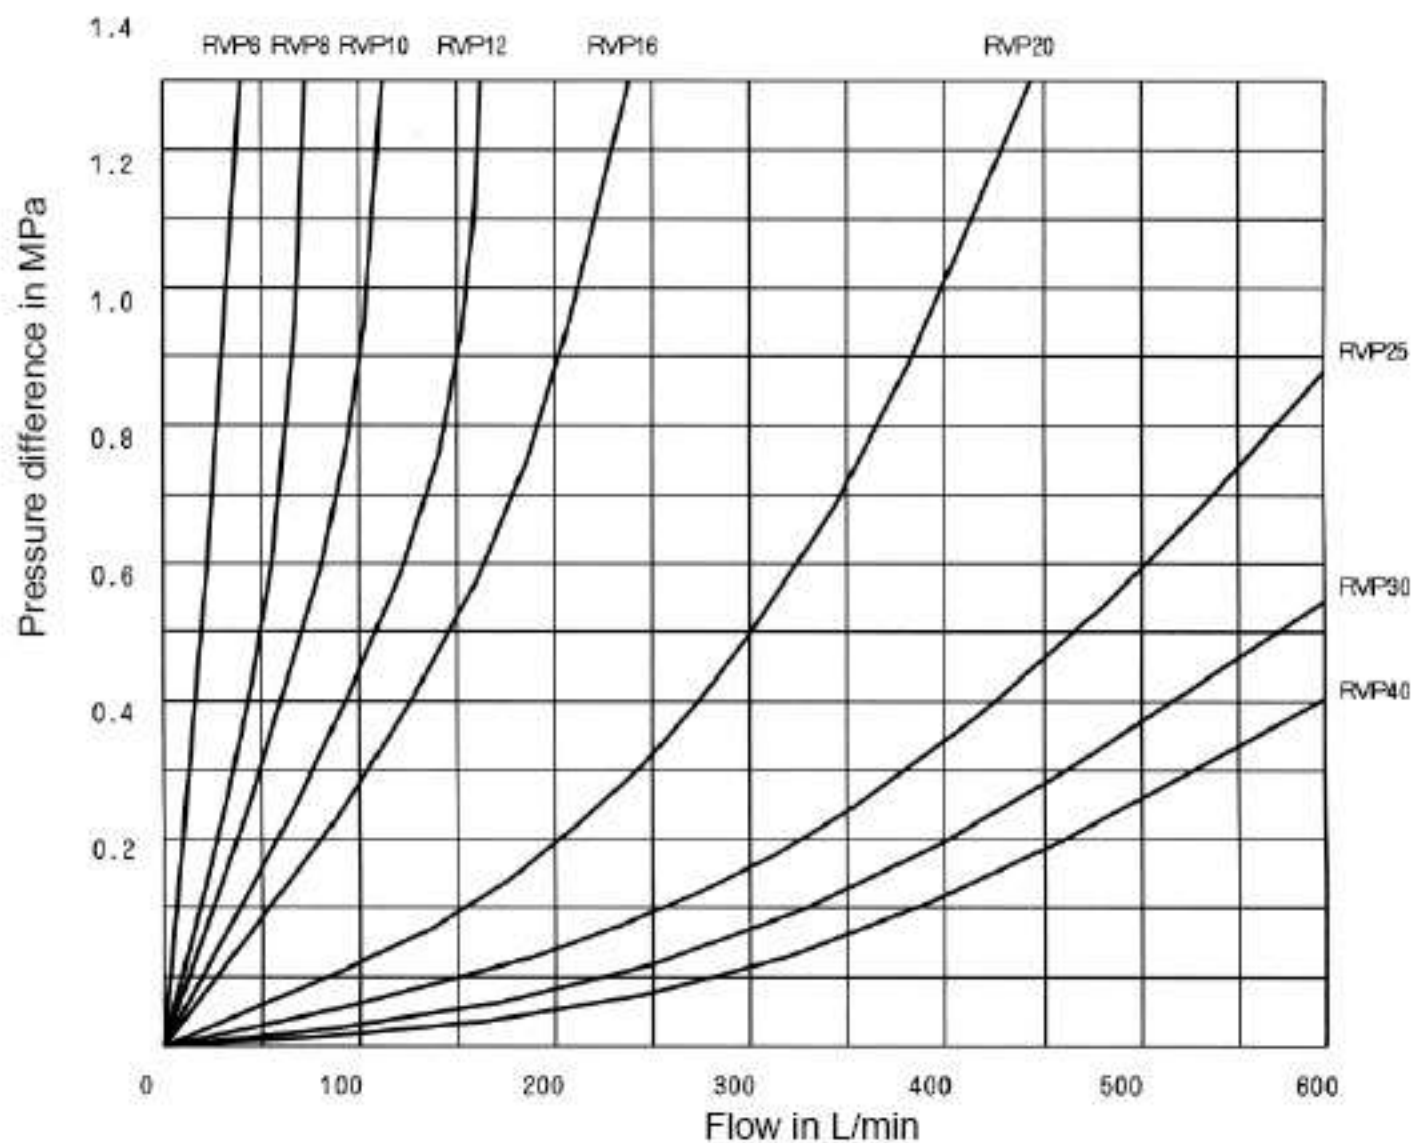

Unit dimensions

(Dimensions in mm)

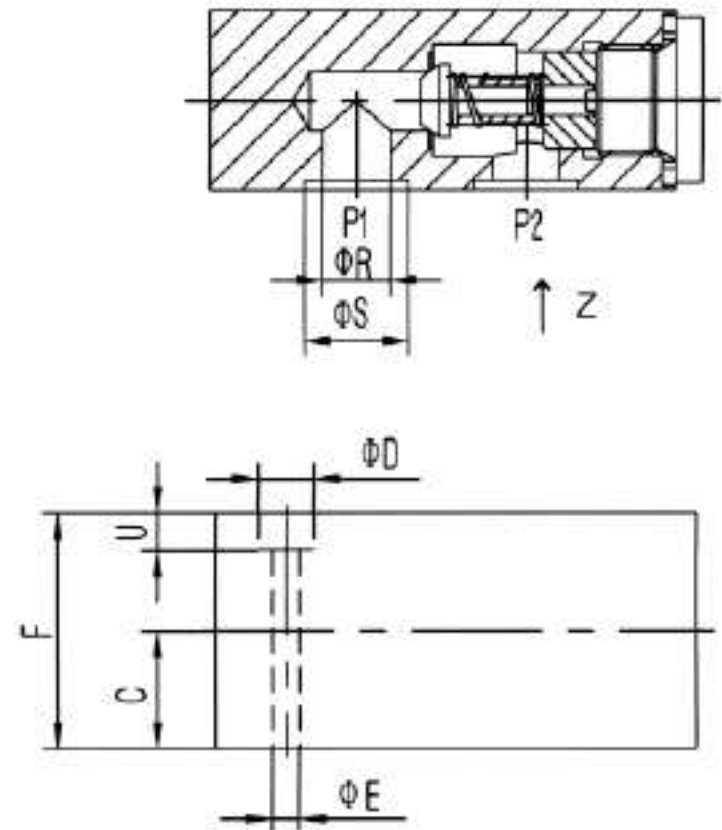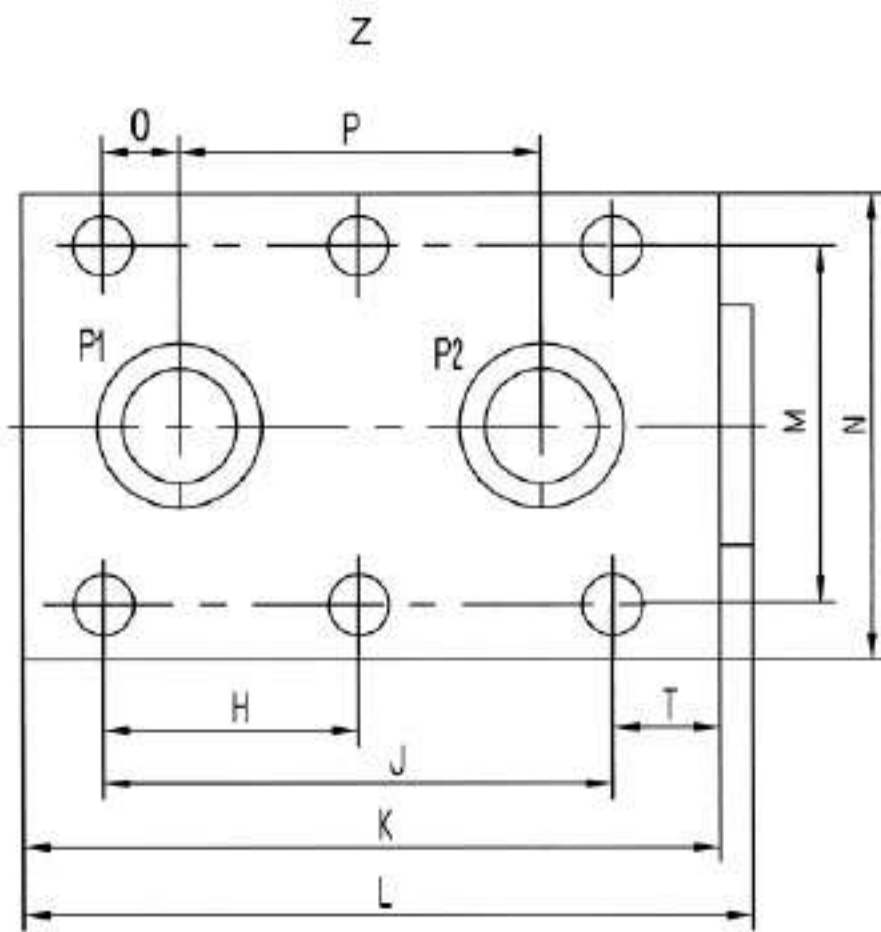

Size	C	ϕD	ϕE	F	H	J	K	L	
RVP-6	11.5	11	6.6	23	-	19	41.5	46	
RVP-8	13	11	6.6	24	-	35	63.5	67	
RVP-10	13.5	11	6.6	27	-	33.5	70	74	
RVP-12	16	11	6.6	32	-	38	80	84	
RVP-16	22.5	14	9	45	38	76	104	109	
RVP-20	26	14	9	50	47.5	95	127	132	
RVP-25	29	18	11	58	60	120	165	170	
RVP-30	37.5	20	14	75	71.5	143	186	192	
RVP-40	50	20	14	100	67	133.5	192	198	
Size	M	N	O	P	ϕR	ϕS	T	U	Weight(Kg)
RVP-6	28.5	41.5	1.6	16	6	12.2	16.1	8	0.26
RVP-8	33.5	46	4.5	25.5	8	13.7	14.3	10	0.50
RVP-10	38	51	4	25.5	10	15.7	18.5	7	0.80
RVP-12	44.5	57.5	4	30	13	21.8	21	7	1.10
RVP-16	54	70	11.4	54	17	24.5	16	12	2.25
RVP-20	60	76.5	19	57	22	31.5	16	12	3.90
RVP-25	76	100	20.6	79.5	28.5	39.2	30	13	6.70
RVP-30	92	115	23.8	95	31	41	28	13	11.0
RVP-40	111	140	25.5	89	45	54	42.5	18	17.0

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Check valve with damp Type SZ8A			RE 22000/12.2004
	Size 8	up to 31.5MPa	up to 32 L/min	

Features:

- For threaded connection
- Five cracking pressures, optional(see ordering details)





Function, section, symbol

The Check valve with damp type SZ8A valve allow free flow in one direction and limit the flow in the opposite direction .The stroke of the poppet , which is guided on its outside diameter, is limited by a mechanical stop. The built-in compression spring supports the closing movement.


The Check valve with damp mainly used in the outlet of pump as back pressure and side through valve.

Symbols

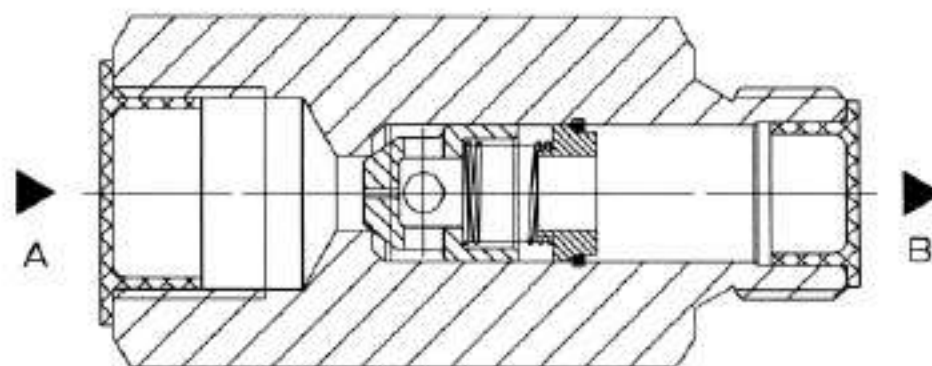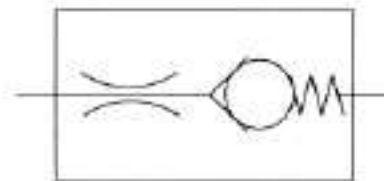

Type SZ8A


Ordering details

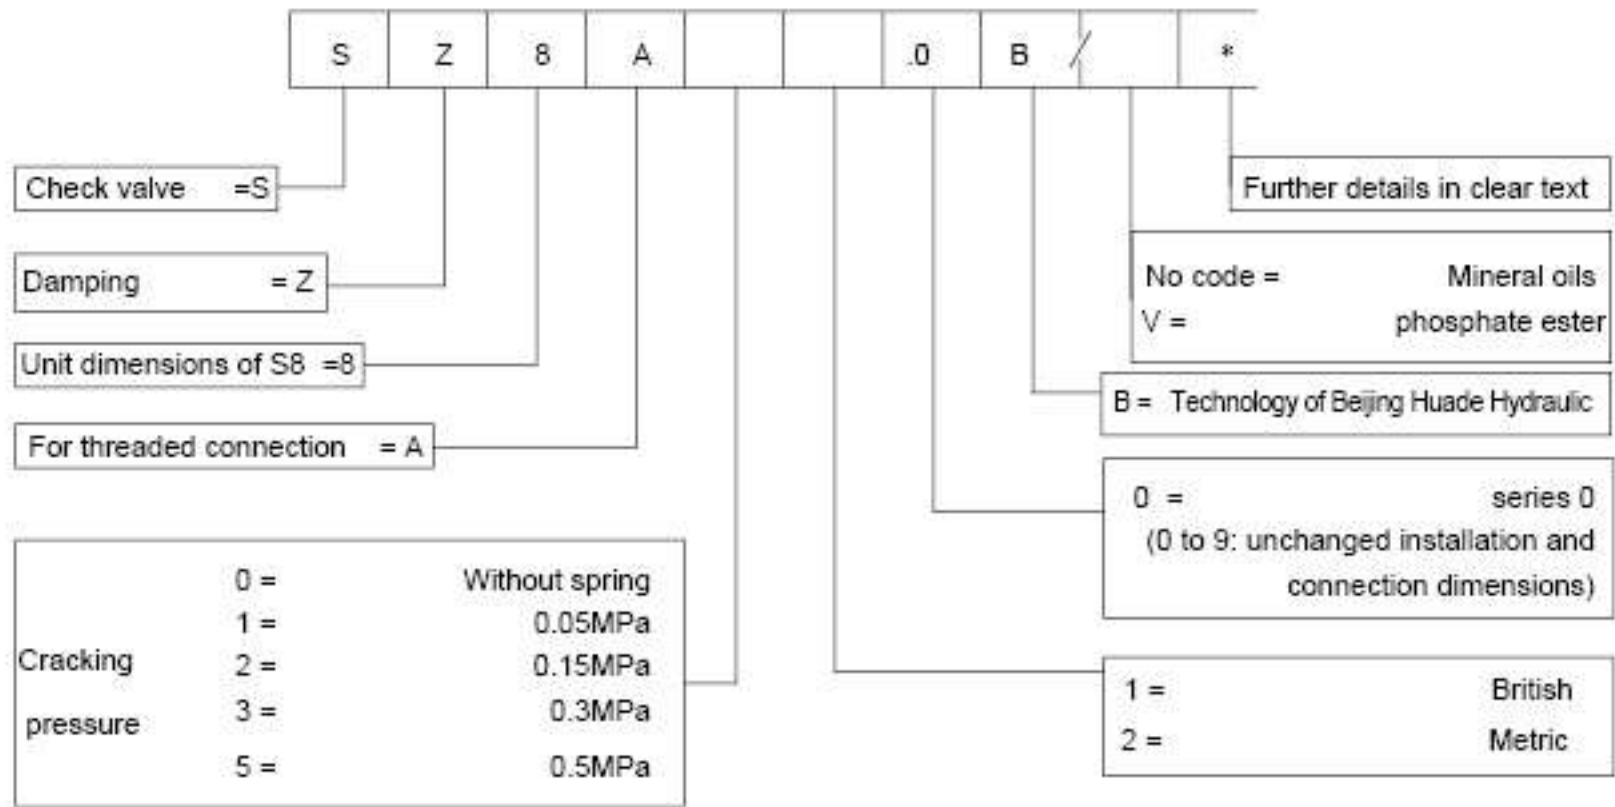


Technical data (For applications outside these parameters, please consult us !)

Hydraulic fluid	Mineral oils or phosphate ester
Temperature range (°C)	- 30 ~ + 80
Viscosity range (mm ² /s)	2.8 ~ 500
Operating pressure (MPa)	up to 31.5
Cracking pressure (L /min)	See below Characteristic curves
Flow q _v max (L /min)	

Characteristic curves (measured at $\nu = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

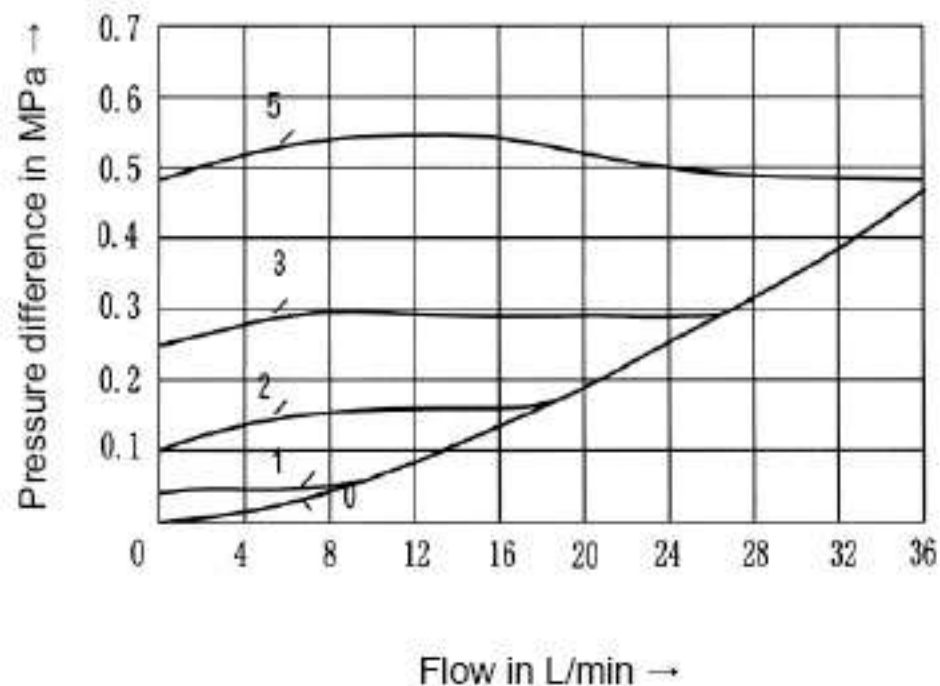

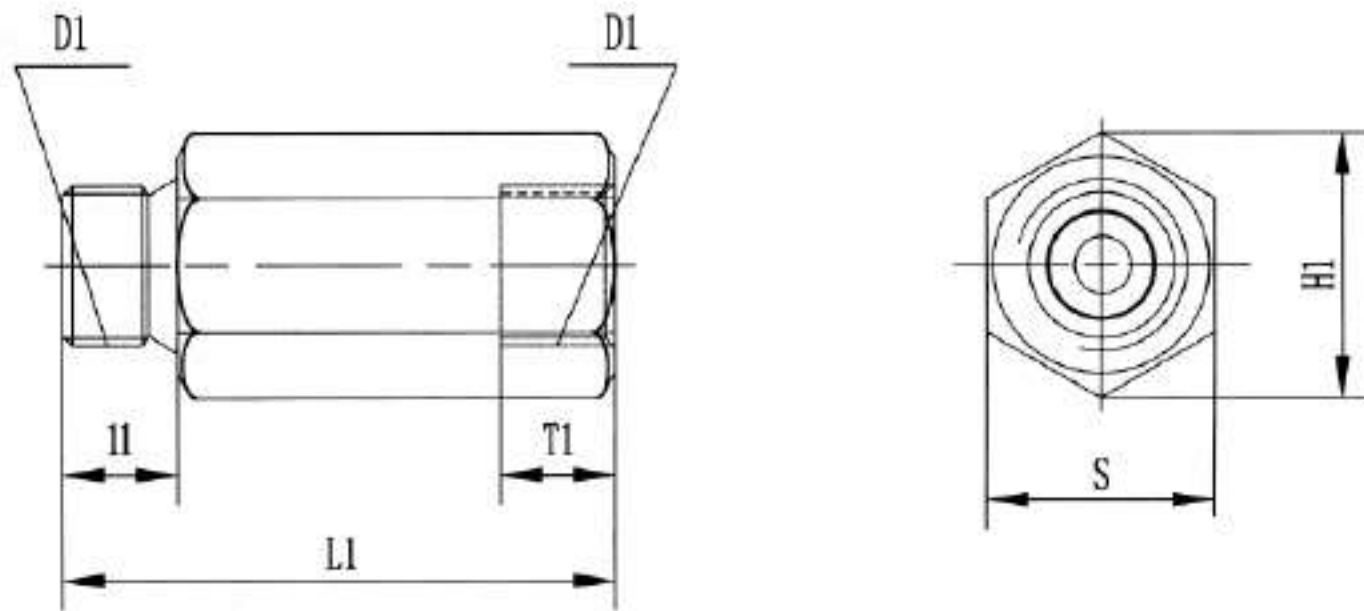

Size	Φ D1	H1	L1	T1	S	Weight (Kg)
8	3/8"	28	58	12	24	0.2

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

Size 8 to 30

up to 31.5 MPa

up to 400L/min

Features:

- For installation in manifold blocks as right angled check valve cartridge
- Leakfree closure in one direction
- 6 opening pressures, optional




Functions,section,symbols



The check valve type M-SR has the task of, preferably closing a flow in one direction and to permit free flow in the opposite direction.

The valve including valve sleeve(1),spool(2),spring seat(3) and springs(4).

It is mainly used in the outlet of pump as back pressure and side through valves.

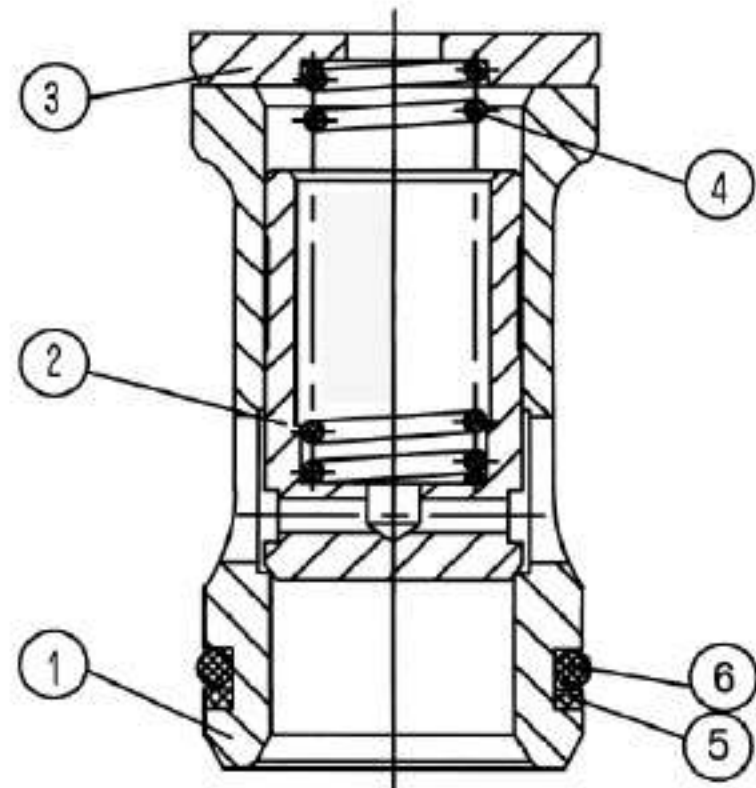

Symbols



Ordering details

M-SR KE - 10 B / *

Check valve =M-SR

Further details in clear text

Size 8	=8
Size 10	=10
Size 15	=15
Size 20	=20
Size 25	=25
Size 30	=30

No code = Mineral oils
V = Phosphate ester

B = The technology of Beijing Huade Hydraulic

Right angled check valve cartridge = KE







10= Series 10 to 19
(10 to 19 = unchanged installation and connection dimensions)

Without spring (not with straight line check valve)	=00	
Cracking pressure see operating curves	} (standard)	=02
		=05
		=15
		=30
		=50

Technical data (for applications outside these parameters, please consult us!)


Max.pressure	(MPa)	Up to 31.5
Cracking pressure	(MPa)	See characteristic curves
Max.flow	(L/min)	See characteristic curves
operating fluid		Mineral oil or phosphate ester
Pressure fluid temperature range	(°C)	-30 to +80
Viscosity range	(mm ² /s)	2.8 to 500
Fluid cleanliness		Maximum permissible degree of contamination of the pressure fluid is to NAS 1638 class 9. We therefore recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.

Characterical Curves (measured at $\nu = 41\text{mm}^2/\text{S}$ and $t = 50^\circ\text{C}$)

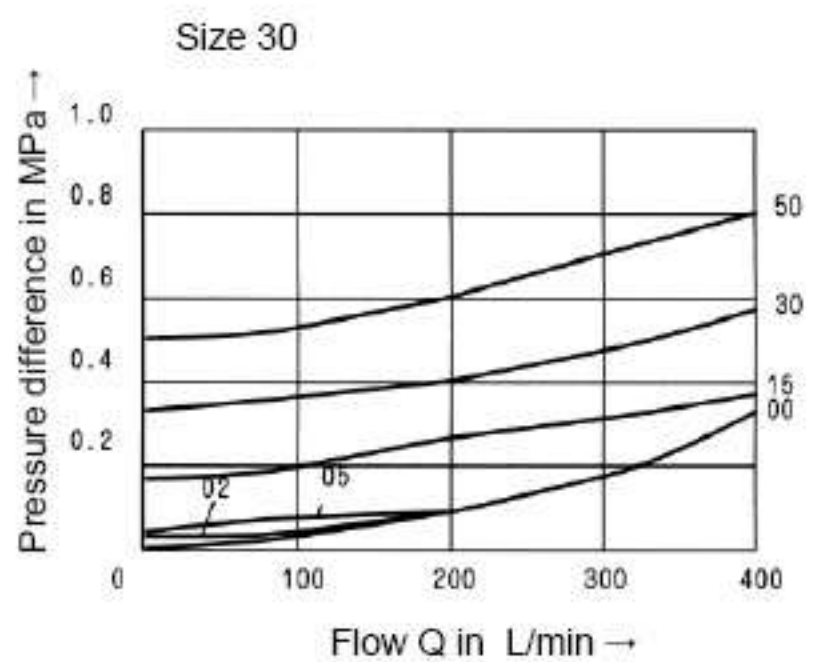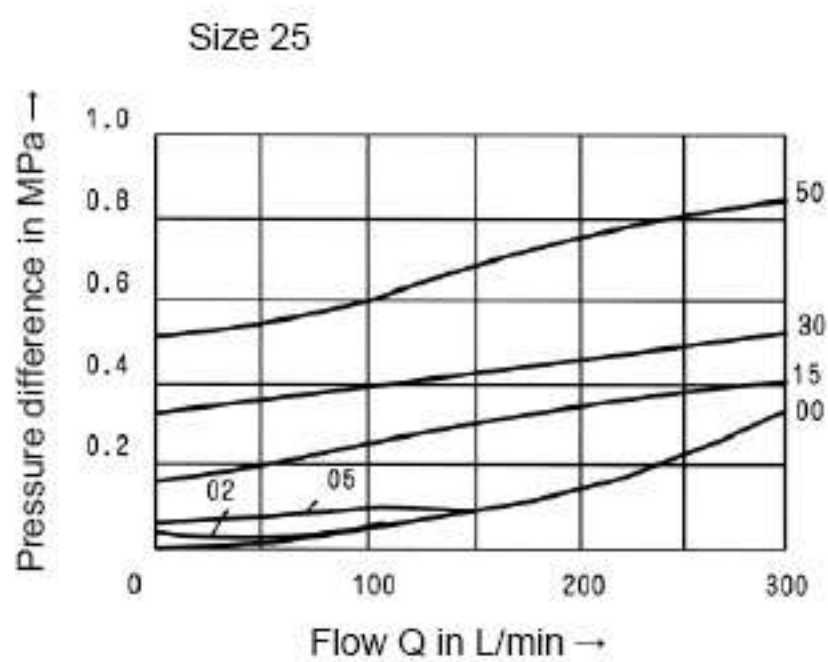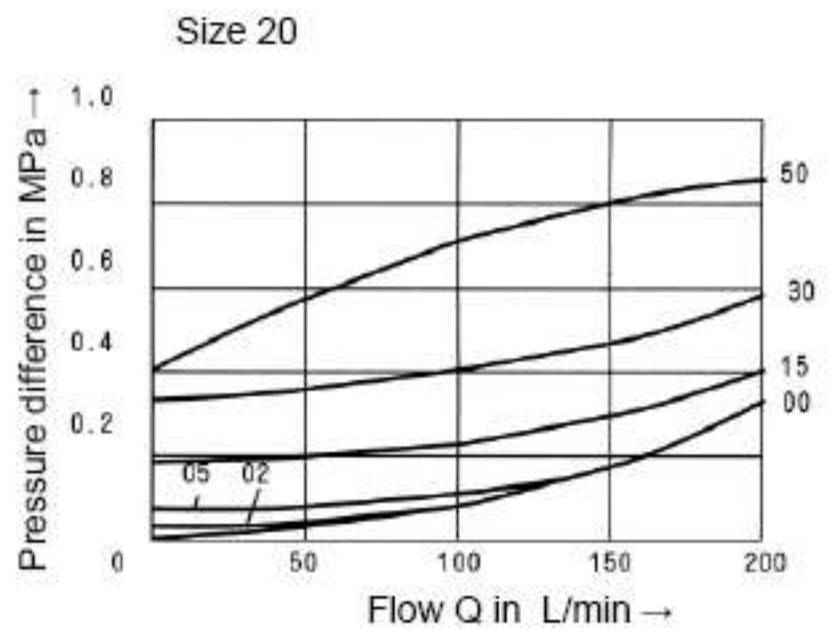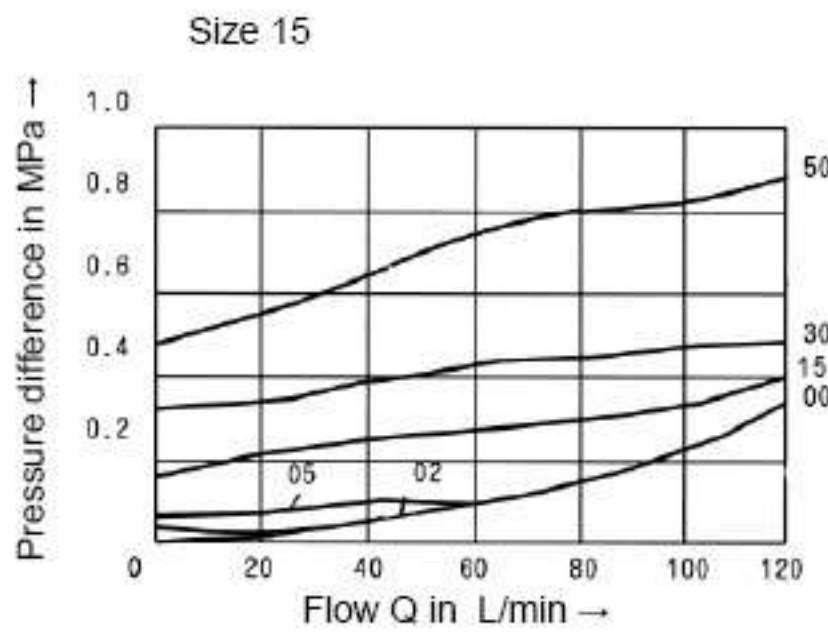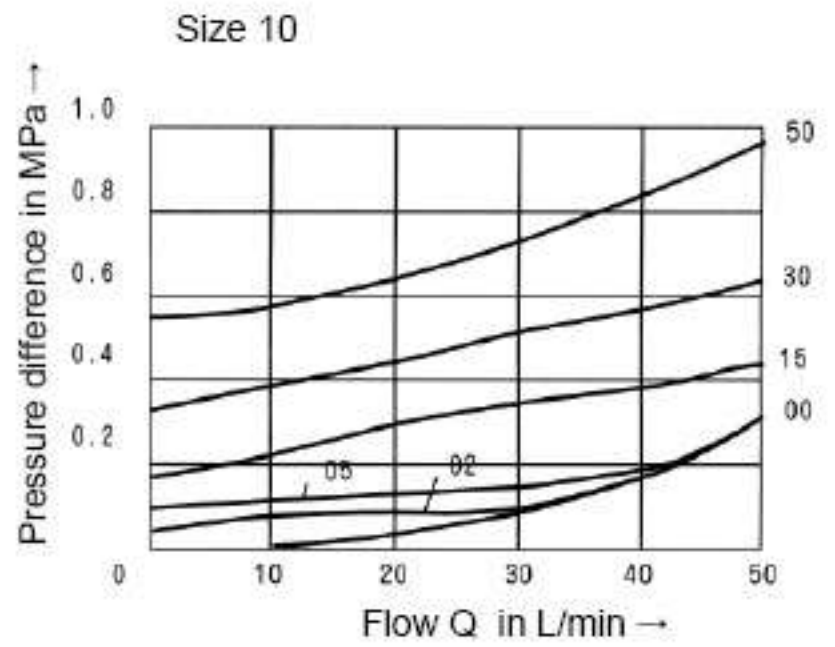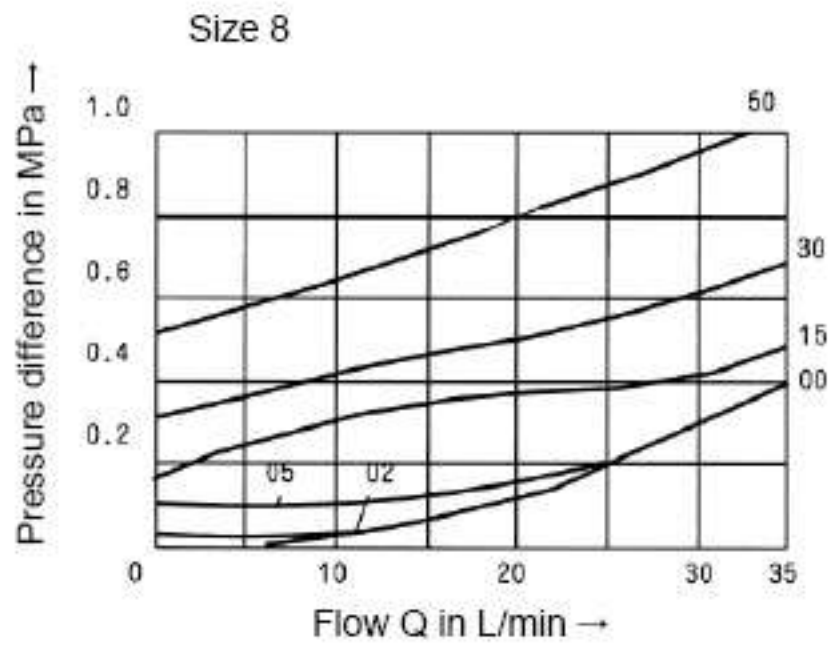


Installation bore: Right angled check valve cartridge

screwed plug to RN143.28

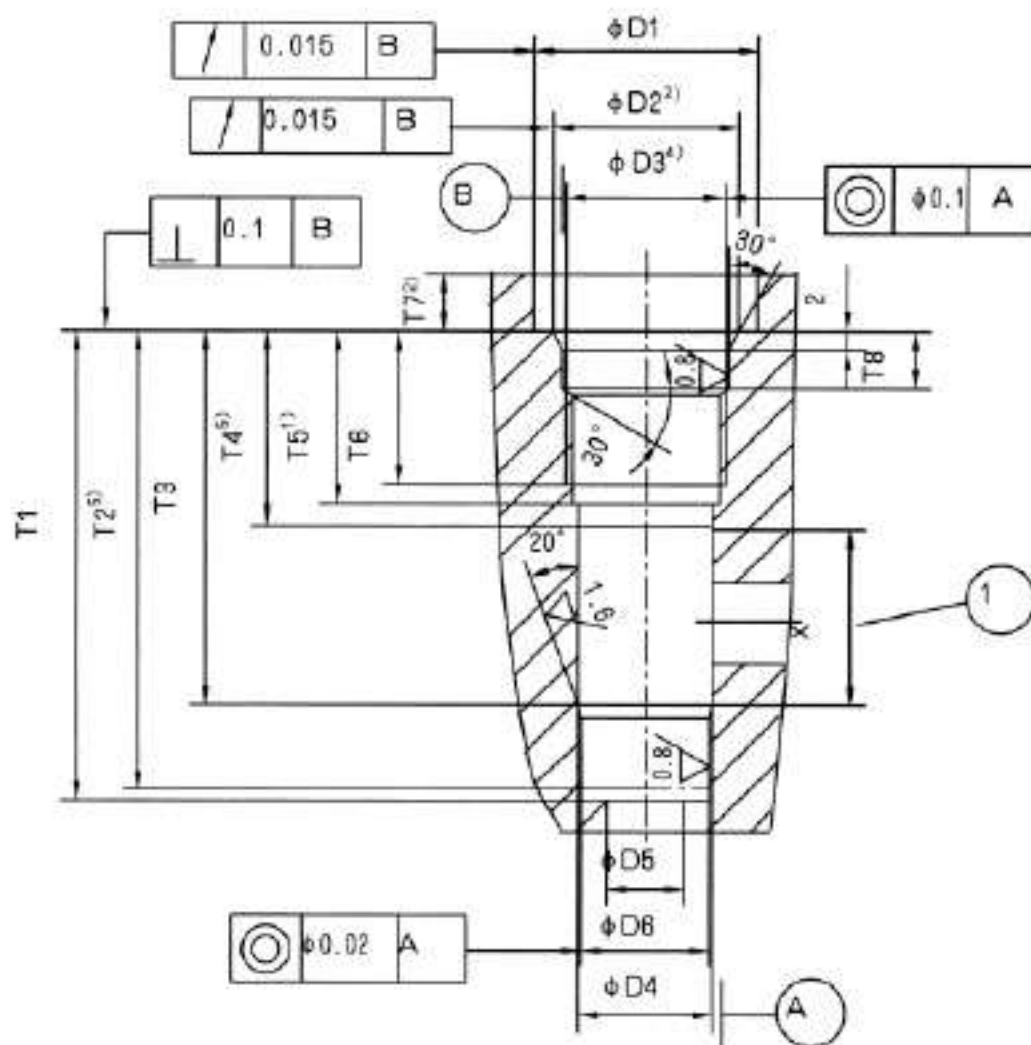

1 The area for downstream bore

screwed plug to RN143.21

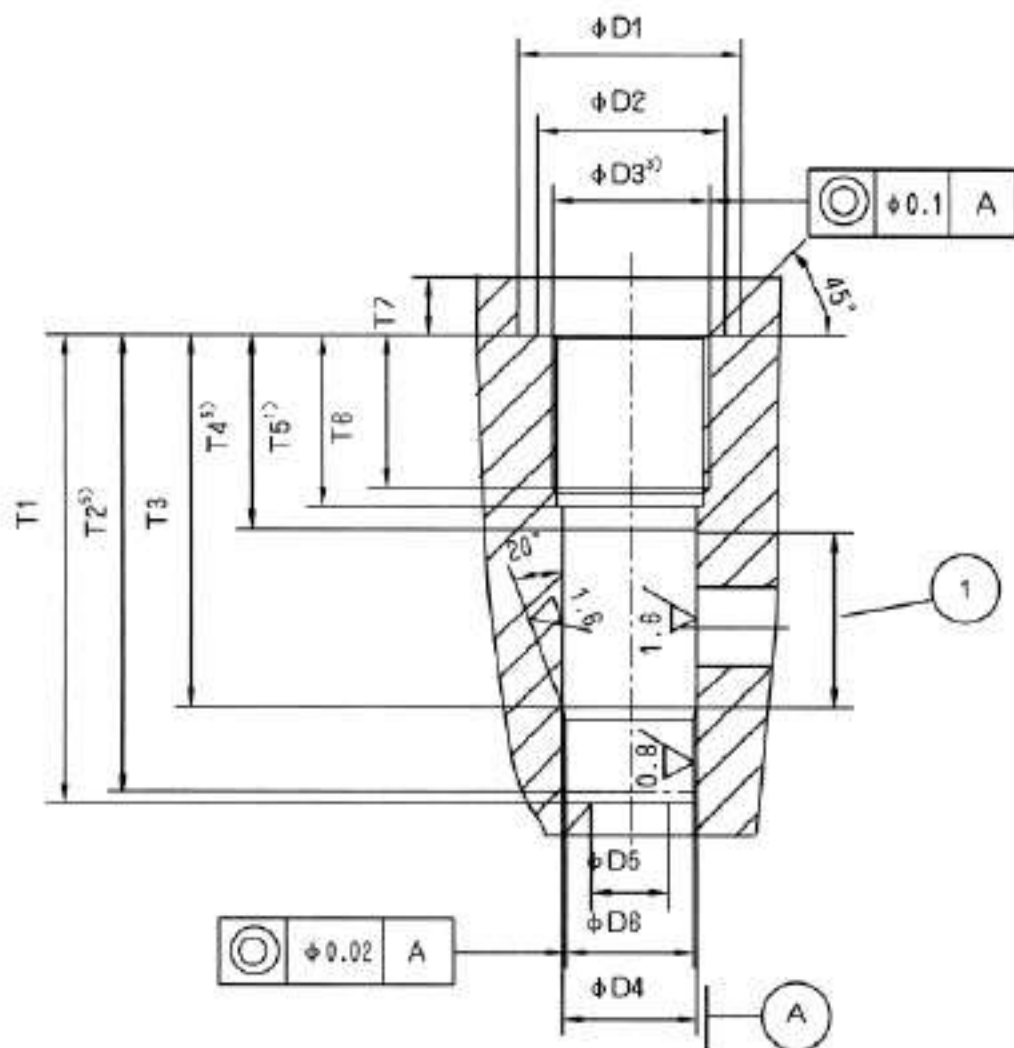


- 1) As the cartridge descent, T5 dimensions are enlarged accordingly.
- 2) With NBR seal
- 3) Pipe screw "G..." accord to ISO 228/1
- 4) Metric ISO-fine thread to DIN13
- 5) The depth of clearance

Installation bore: Right angled check valve cartridge

(Dimensions in mm)

Size	L-0.1
8	36.3
10	39.3
15	45.8
20	55.3
25	74.3
30	83.3

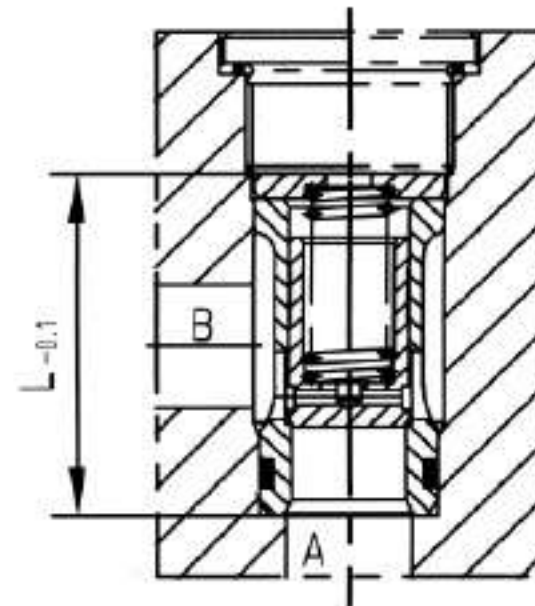

Right angled check valve cartridge

Installation bore: Right angled check valve cartridge

(Dimensions in mm)

Size	P (MPa)	φ D1	φ D2	D3	φ D4 ^{H8}	φ D5	φ D6 ^{H7}
8	31.5	23	17.1	G3/8"	14	8	13
10	31.5	28	21.4	G1/2"	18	10	17
15	31.5	33	26.8	G3/4"	24	15	22
20	31.5	41	33.8	G1"	30	20	28
25	31.5	51	42.5	G1 1/4"	38	25	36
30	31.5	56	48.5	G1 1/2"	44	30	42
25	31.5	56+0.5	44H8	M42 × 1.5	38	25	36
30	31.5	62+0.5	50H8	M48 × 1.5	44	30	42

Size	T1 ^{+0.1}	T2	T3	T4	T5	T6	T7	T8 ^{+0.2}	X	Weight Z (kg)
8	48.5	47.5	38.5	20	15	12	6	-	18	0.05
10	53.5	52.5	43.5	24	18	14	6	-	19	0.05
15	62	60.5	50	26	20.5	16	6	-	24	0.05
20	71.5	70	56.5	26	20.5	16	7	-	30	0.05
25	90.5	88	72.5	28	22	16	7	-	43	0.1
30	99.5	96.5	79.5	31	22	16	7	-	48	0.1
25	106.5	104	88.5	45	39	33	5	12	43	-
30	115.5	112.5	95.5	48	39	33	5	12	48	-

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Check valve sandwich plate Type Z1S...30B/			RE 21533/12.2004
	Size 6,10	up to 31.5 MPa	up to 100L/min	Replaces; RE 21533/05.2001


Features:

- Sandwich plate valve for use in vertical stacking assemblies
- 8 different isolating functions

The Z1S 6 valve is a direct operated check valve in sandwich plate design.

It is used for the leak-free closure in one direction and allows free-flow in the counter direction.


This valve type has a metallic seal between poppet (3) and housing (1). Valves of this type are especially suitable for applications with operating pressures above 10.0 MPa and flow velocities over 4 m/s.

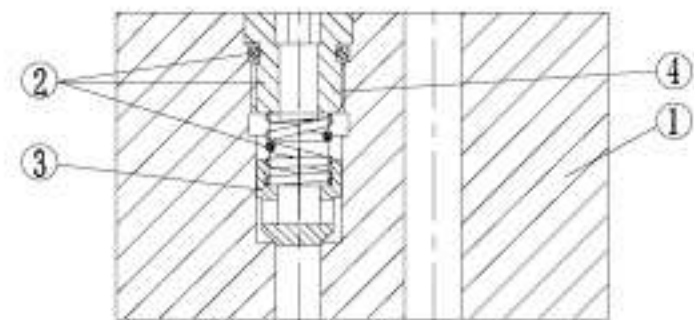

Ordering details

Z1S				— 30	B /	*
-----	--	--	--	------	-----	---

Size 6	= 6
Size 10	= 10

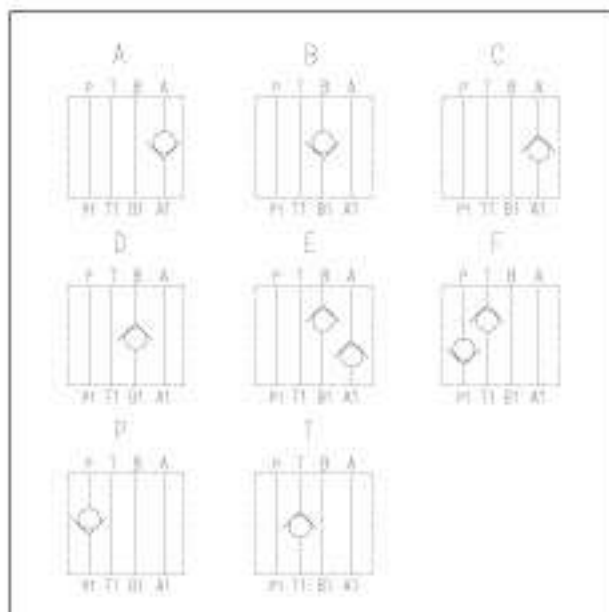

Further details in clear text

No code = Mineral oils
V = phosphate ester

B = The technology of Beijing Huade Hydraulic

30 = Series 30 to 39
(30 to 39: unchanged installation and connection dimensions)



1= Cracking pressure 0.05 MPa
2= Cracking pressure 0.3 MPa
3= Cracking pressure 0.5 MPa

Technical data

Size		6	10
Max. flow (L/min)		40	100
Max. operating pressure (MPa)		31.5	
Cracking pressure		See the ordering details	
Pressure fluid		Mineral oils(for NBR seal) or phosphate ester(for FPM seal)	
Pressure fluid temperature range (°C)		-30 to +80	
Viscosity range (mm ² /s)		2.8 to 500	
Weight (kg)		0.8	2.3

* For application outside these parameter, please consult us!


Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

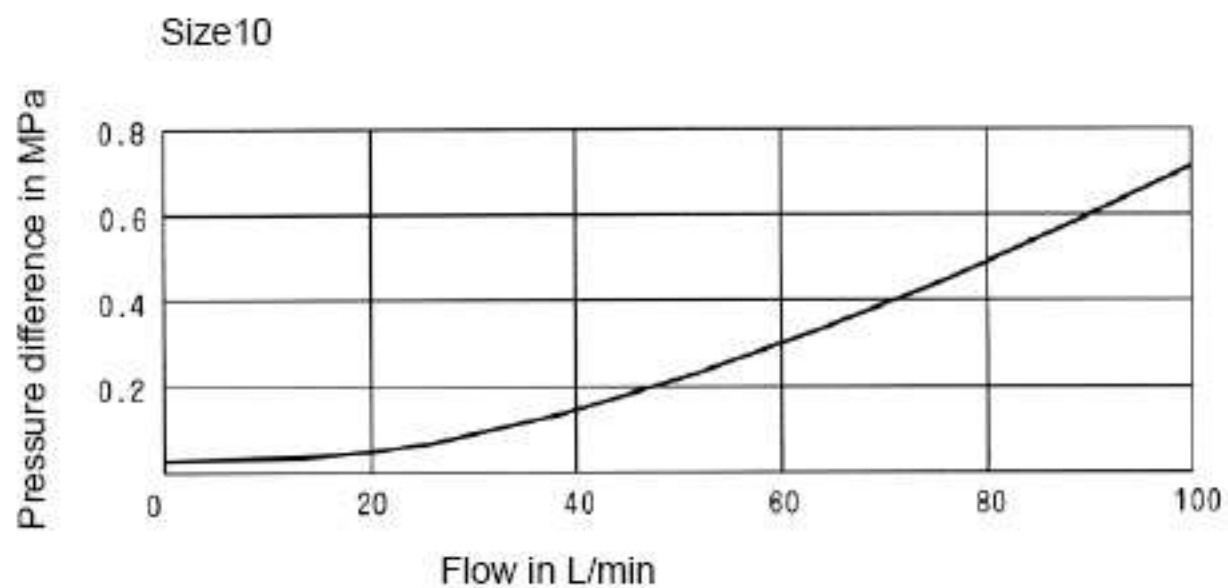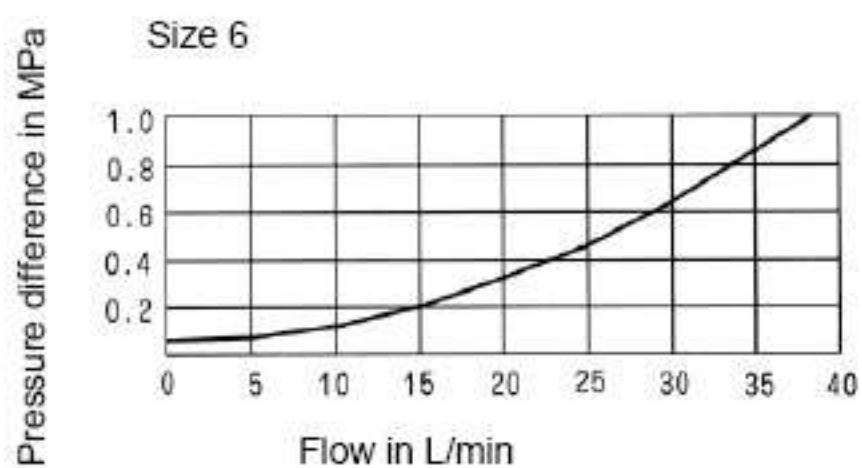

Unit dimensions

(Dimensions in mm)

Size 6
O-ring 4-9.25X1.78

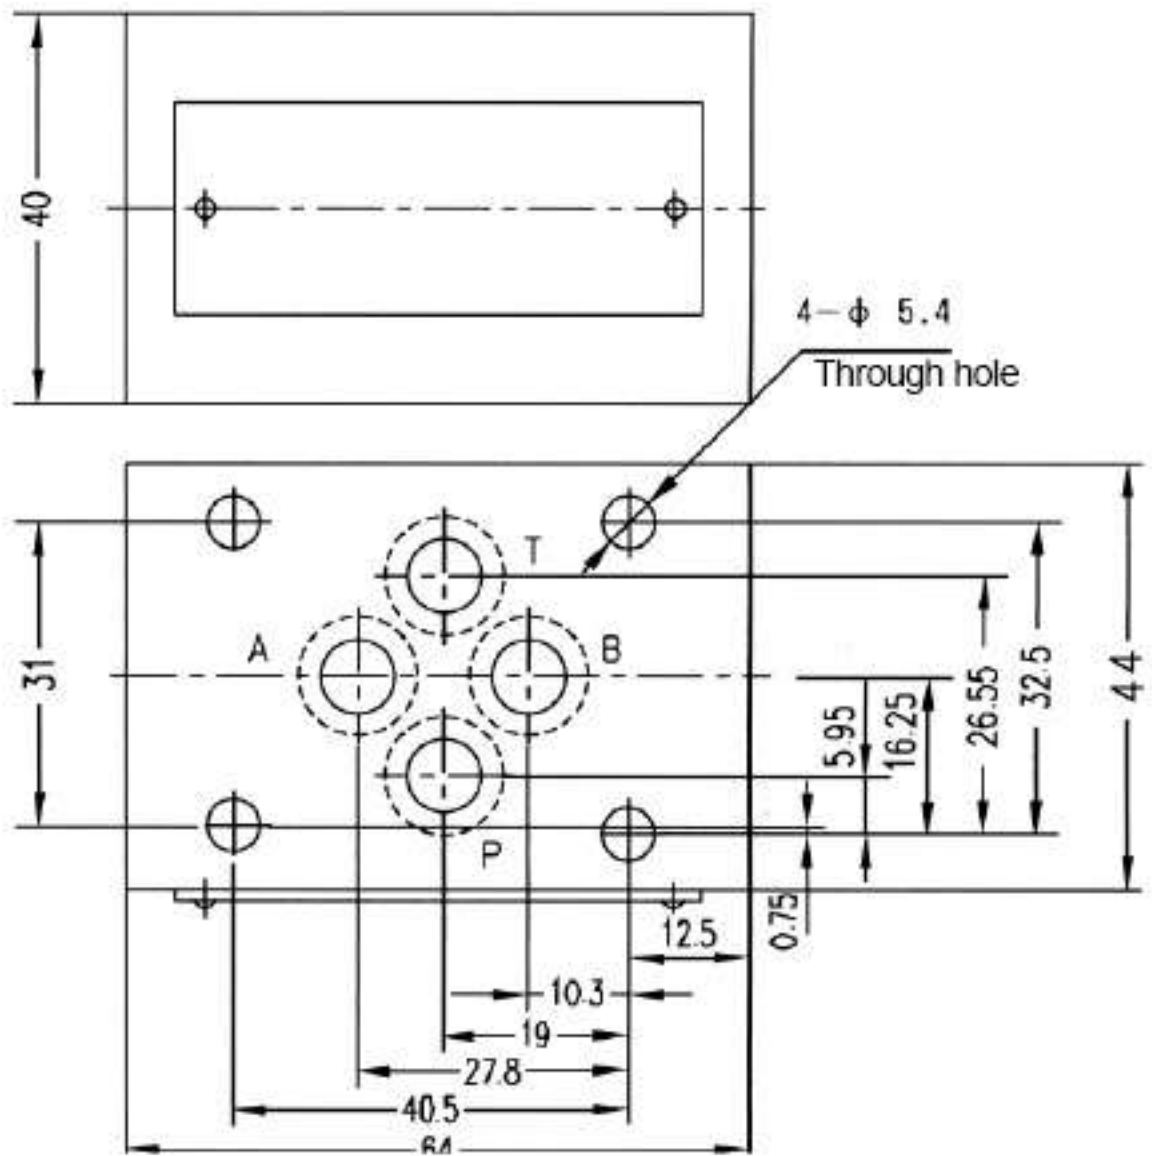


Size 10

O-ring 5-12X2

1 This port is blocked in versions 'F' and 'T'.

2 In versions 'F' and 'T' the check valve is installed in this channel.

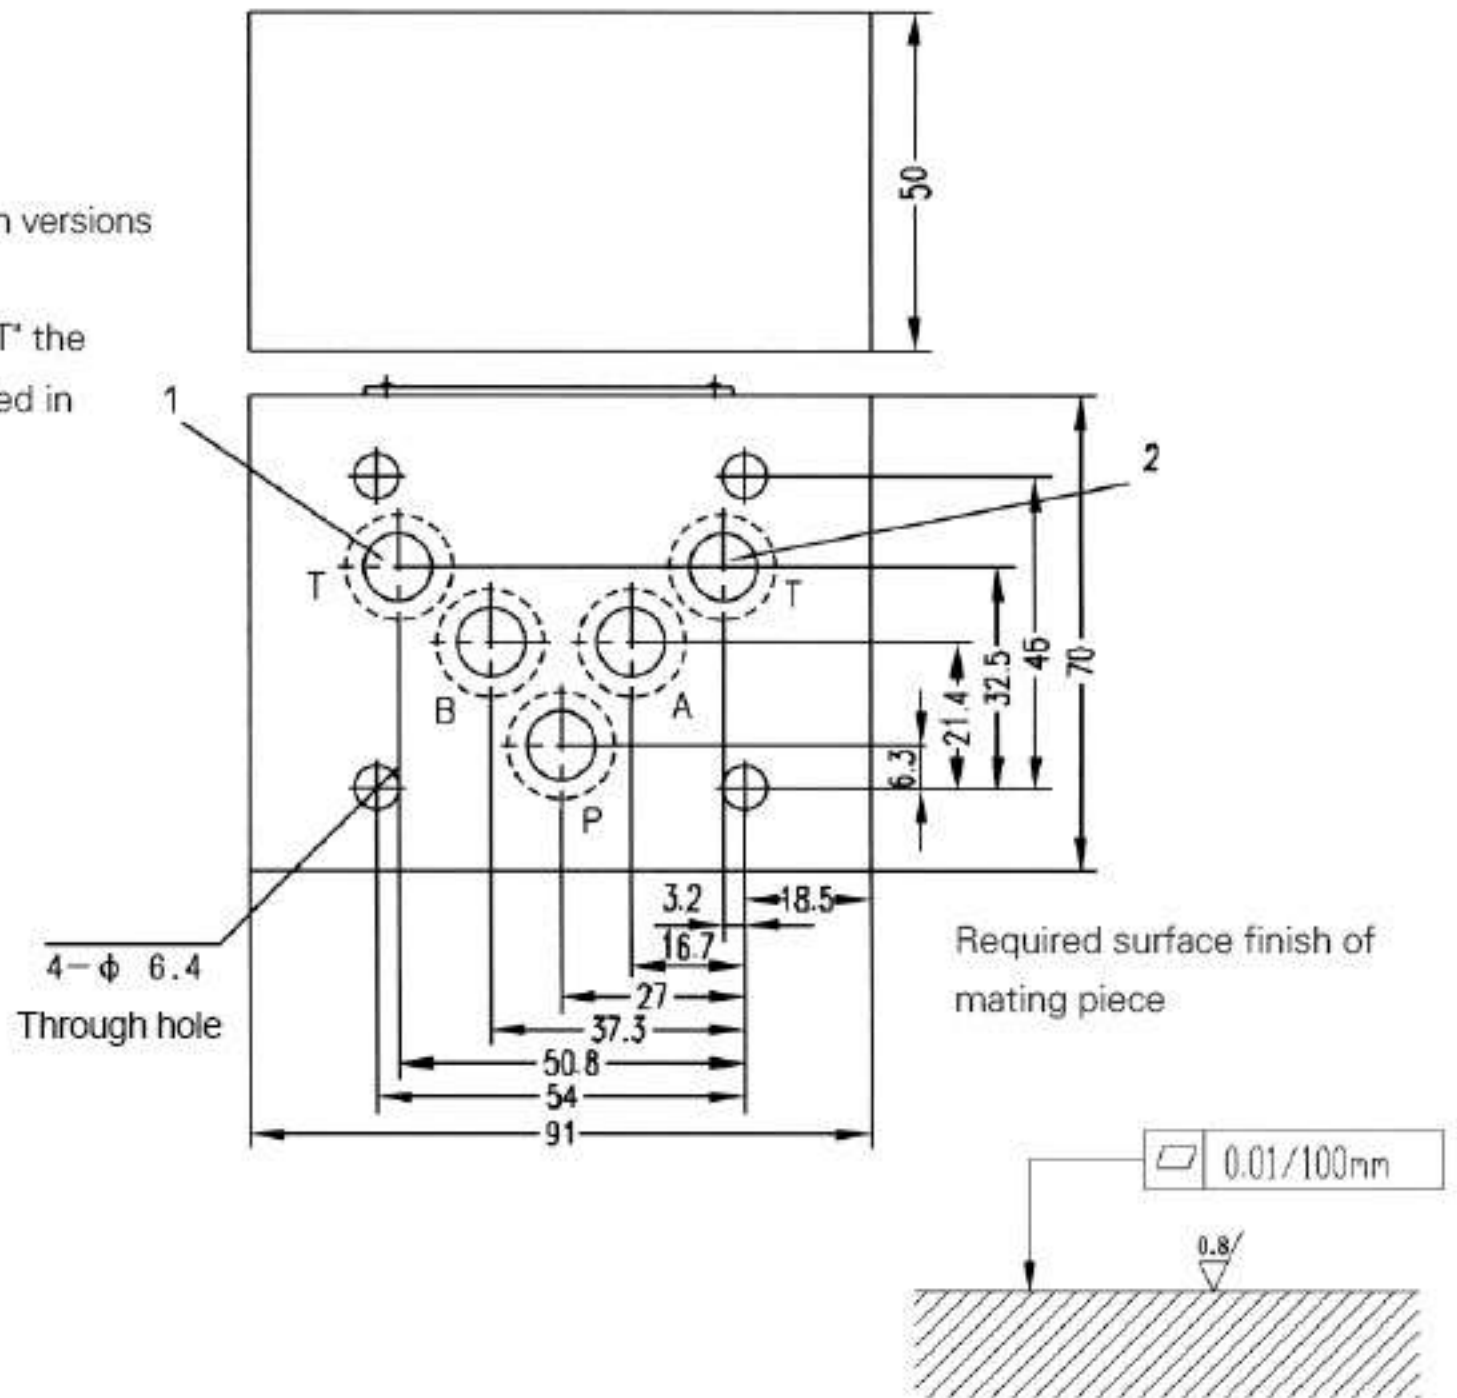

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Pilot operated Check valve sandwich plate Type Z2S			RE 21600/12.2004
	size 6, 10 16, 22	up to 31.5 MPa	up to 360L/min	Replace: 21547/05.2001 21551/05.2001 RE: 21556/05.2001 21560/05.2001

Features:


- For the leak free closure of one or two service ports
- Mounting pattern to DIN 24 340 form A, ISO 4401 and ETOP-RP 121H for use in vertical stacking assemblies



Functional, section


Hydraulic pilot operated check valves type Z2S are of sandwich plate design. They are used for the leak-free closure of one or two service ports, even for long periods of time. Free flow occurs from A1 to A2 or B1 to B2. Flow in the opposite direction is blocked.

In order to ensure correct closing of the valve, the service ports of the directional valve must be connected to tank in the neutral position.

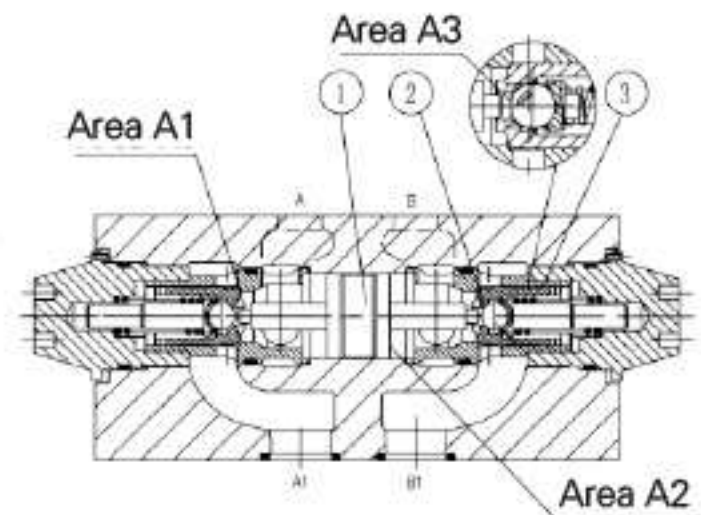

Z2S22...30B/...Sandwich plate valve

Ordering details




Size 6	= 6
Size 10	= 10
Size 16	= 16
Size 22	= 22

Further details in clear text

No code = Mineral oils
V = Phosphate ester


B= The technology of Beijing Huade Hydraulic

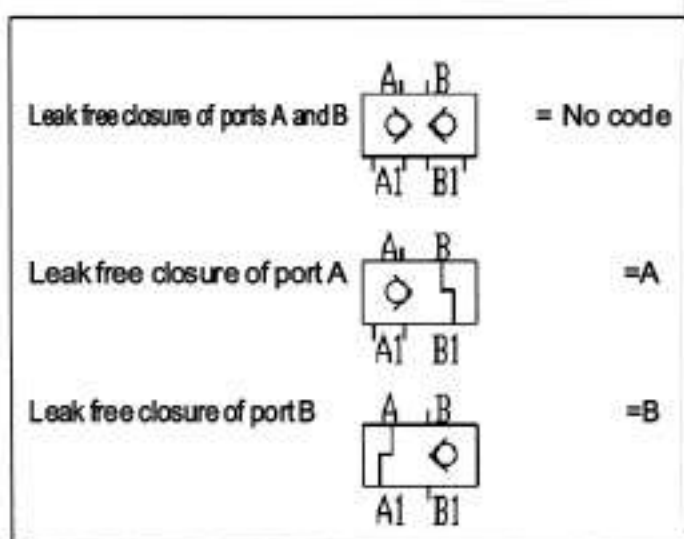

20 = Series 20 to 29 (Apply to size 10)
(20 to 29: unchanged installation and connection dimensions)
30 = Series 30 to 39 (Apply to size 16, 22)
(30 to 39: unchanged installation and connection dimensions)
40 = Series 40 to 49 (Apply to size 6)
(40 to 49: unchanged installation and connection dimensions)


(only for size 10)
1= Cracking pressure 0.15 MPa
2= Cracking pressure 0.3 MPa
3= Cracking pressure 0.6 MPa

Typical circuit example

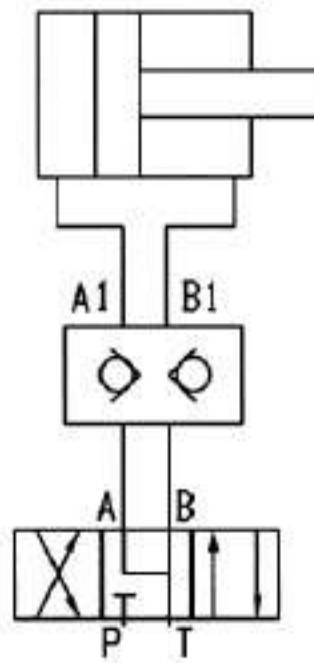


Symbols


Z2S.../

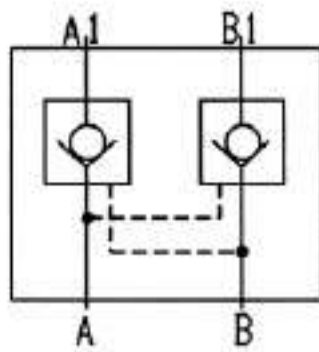

Z2S...A.../

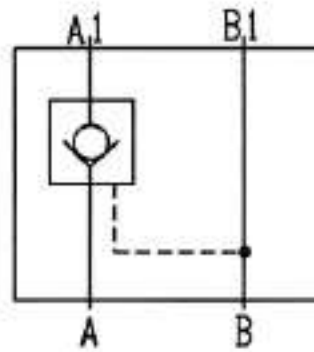

Z2S...B.../

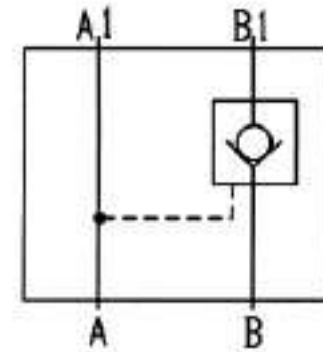

Technical data

Size		6	10	16	22		
Max. flow L/min	(L/min)	to 60	to 120	to 200	to 360		
Max. operating pressure	(MPa)	31.5					
Cracking pressure	(MPa)	0.15	0.15	0.3	0.6	0.25	0.25
Directions		Flow freely via check valve from A to A1 or B to B1 pilot operated from B1 to B or A1 to A					
Area ratio		A1/A2=1:3	$\frac{A1/A2=1:2.86}{A3/A2=1:11.45}$	$\frac{A1/A2=1:11.8}{A3/A2=1:2.8}$	$\frac{A1/A2=1:13.6}{A3/A2=1:2.8}$		
Pressure fluid		Mineral oils(for NBR seal) or phosphate ester(for FPM seal)					
Pressure fluid temperature range	(°C)	-30 to +80					
Viscosity range	(mm ² /s)	2.8 to 500					
Weight	(kg)	0.8	2	7	11.7		


Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

Type Z2S6

— = A → A1; B → B1

----- = A1 → A; B1 → B

1. Normal cracking
2. Check valve cartridge
3. Flow freely
(without check valve)
4. Through check valve cartridge
5. Flow freely
(without check valve cartridge
Type "A" and type "B")

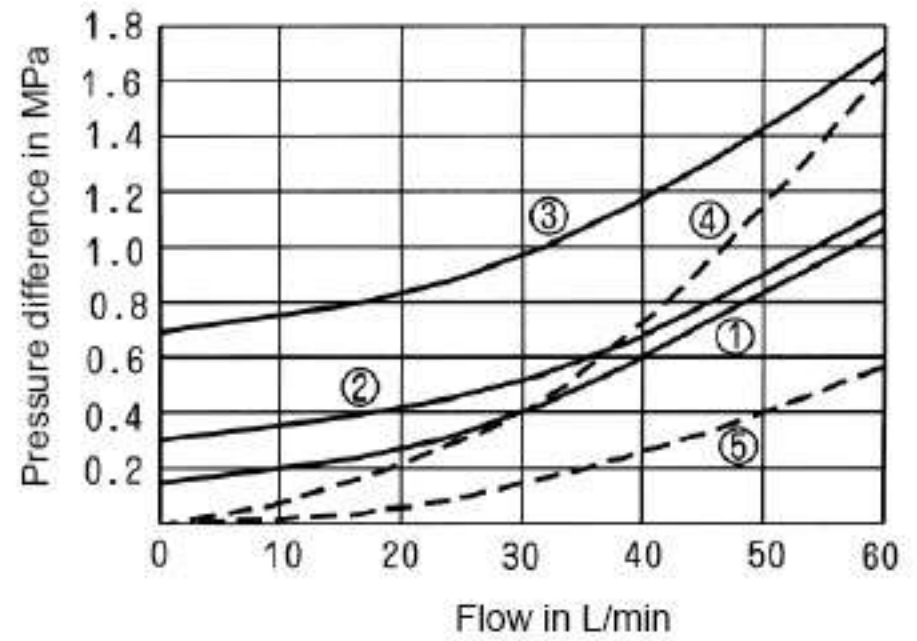


Type Z2S10

— = A → A1; B → B1

----- = A1 → A; B1 → B


1. Cracking pressure 1 = 0.15 MPa
2. Cracking pressure 2 = 0.3 MPa
3. Cracking pressure 3 = 0.6 MPa

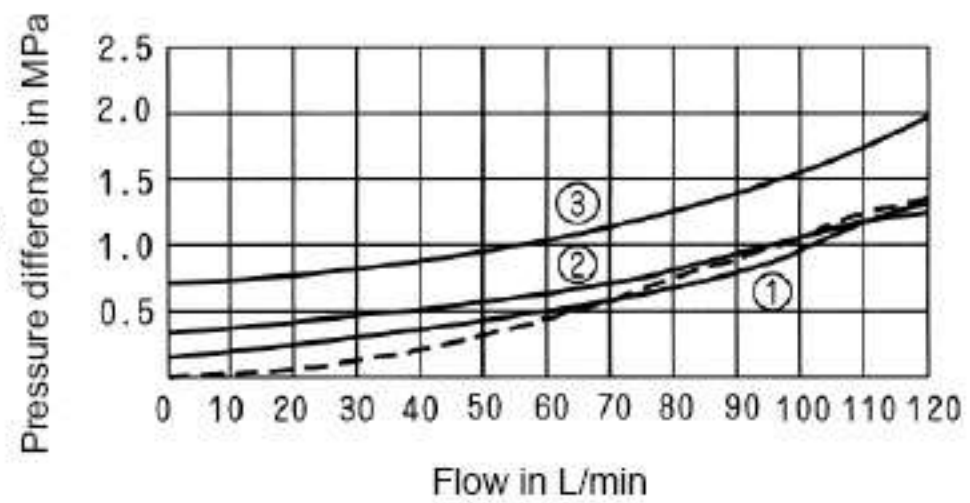

Type Z2S16

— = A → A1; B → B1


----- = A1 → A; B1 → B

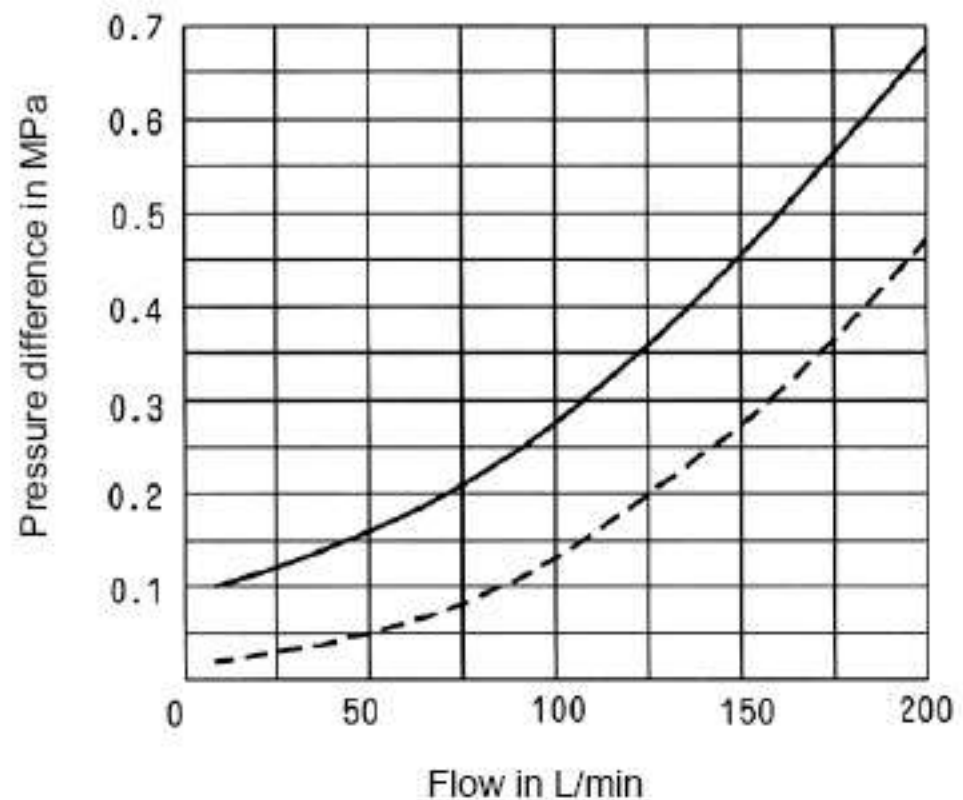

Type Z2S 22


— = A → A1; B → B1



----- = A1 → A; B1 → B

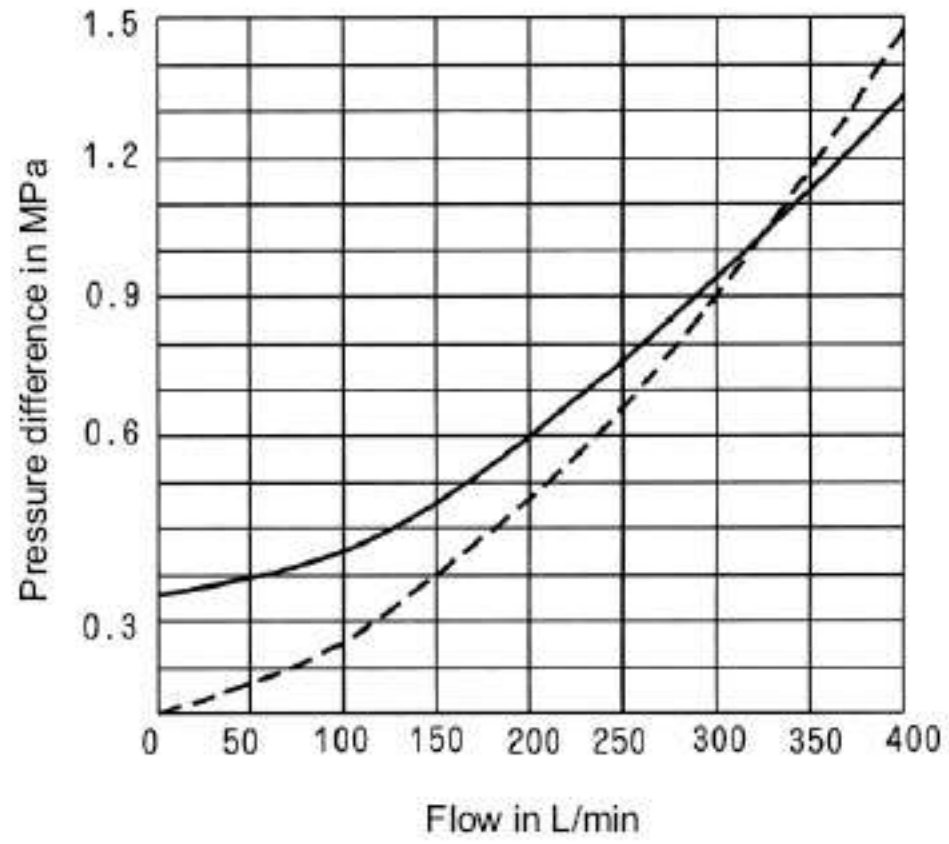

Unit dimensions : (Size6)

(Dimensions in mm)


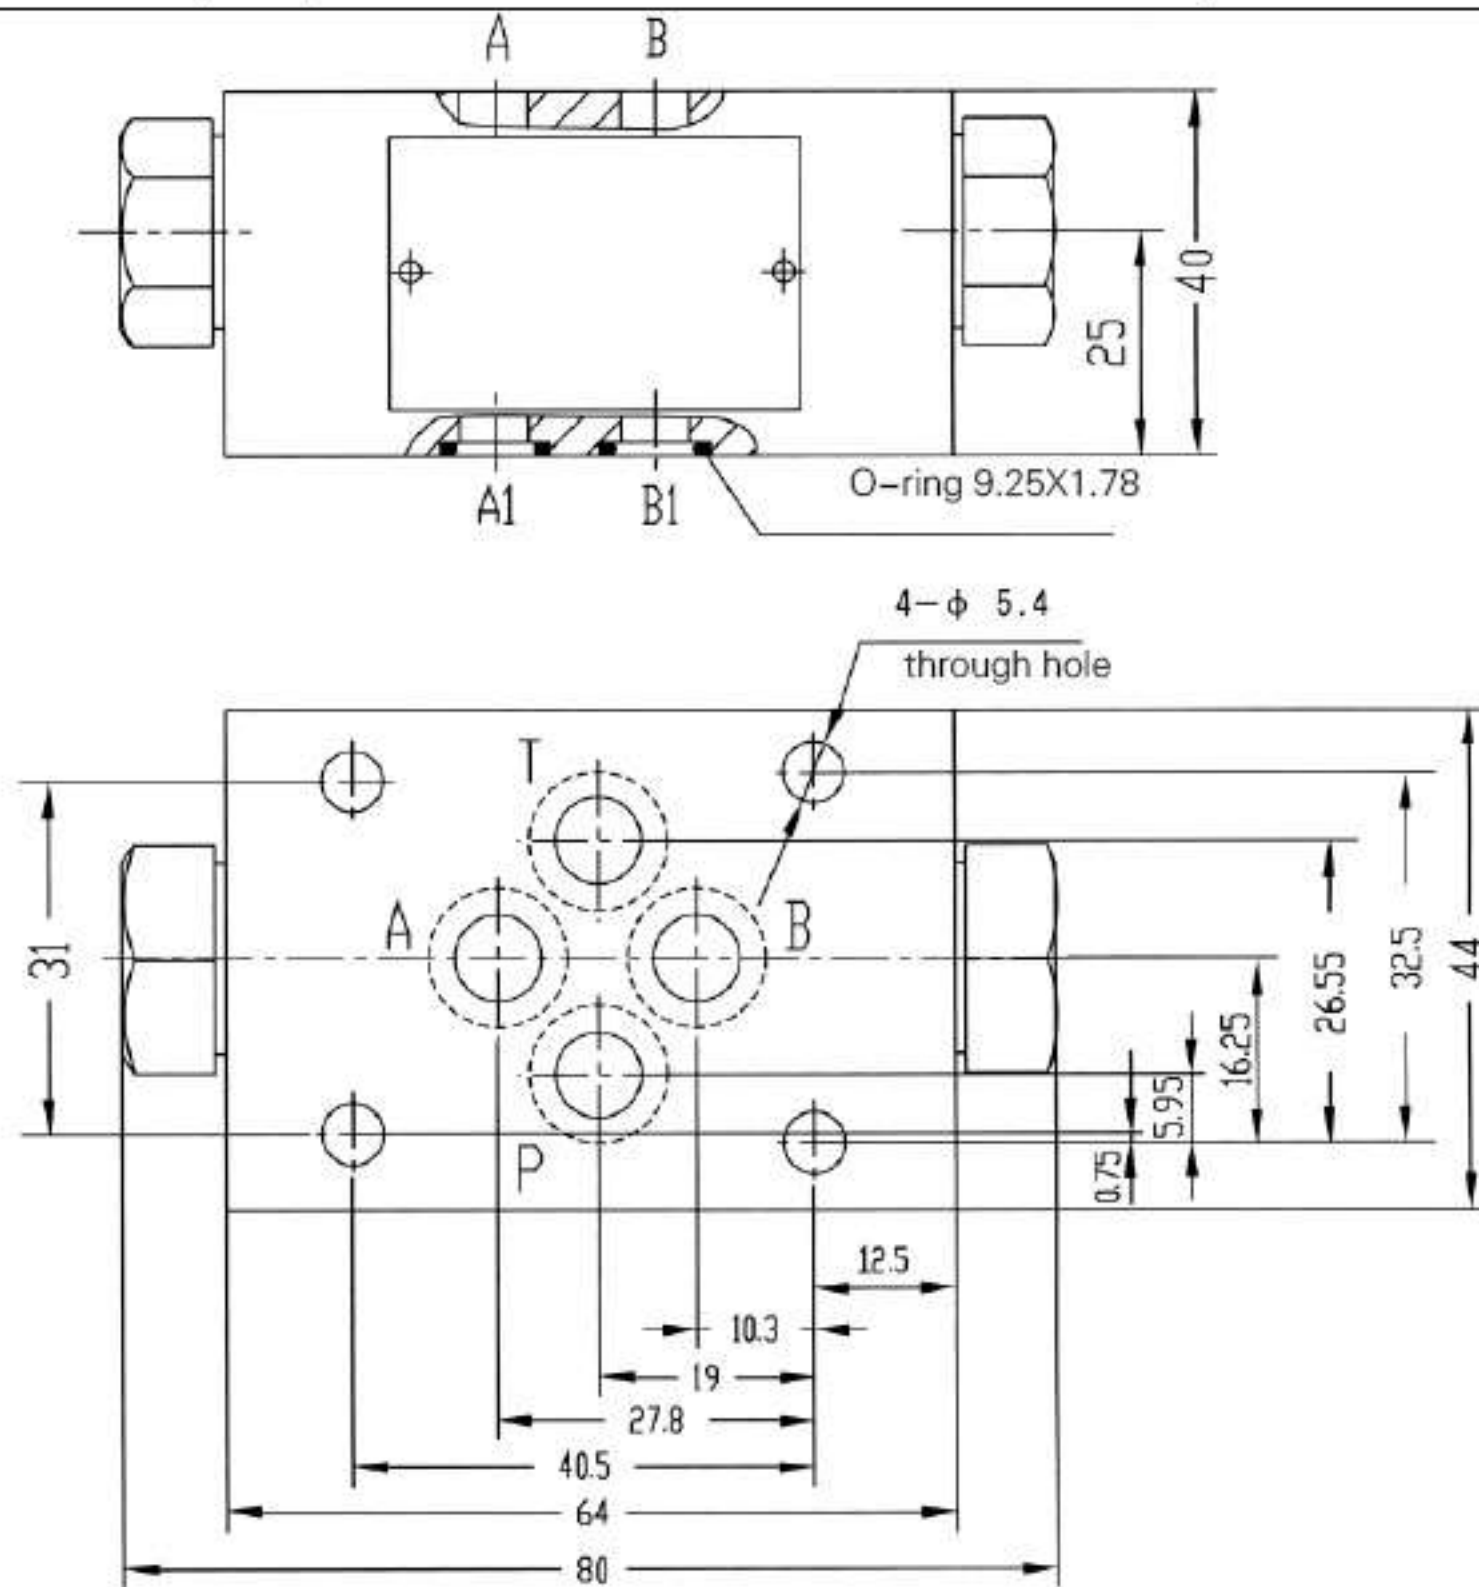


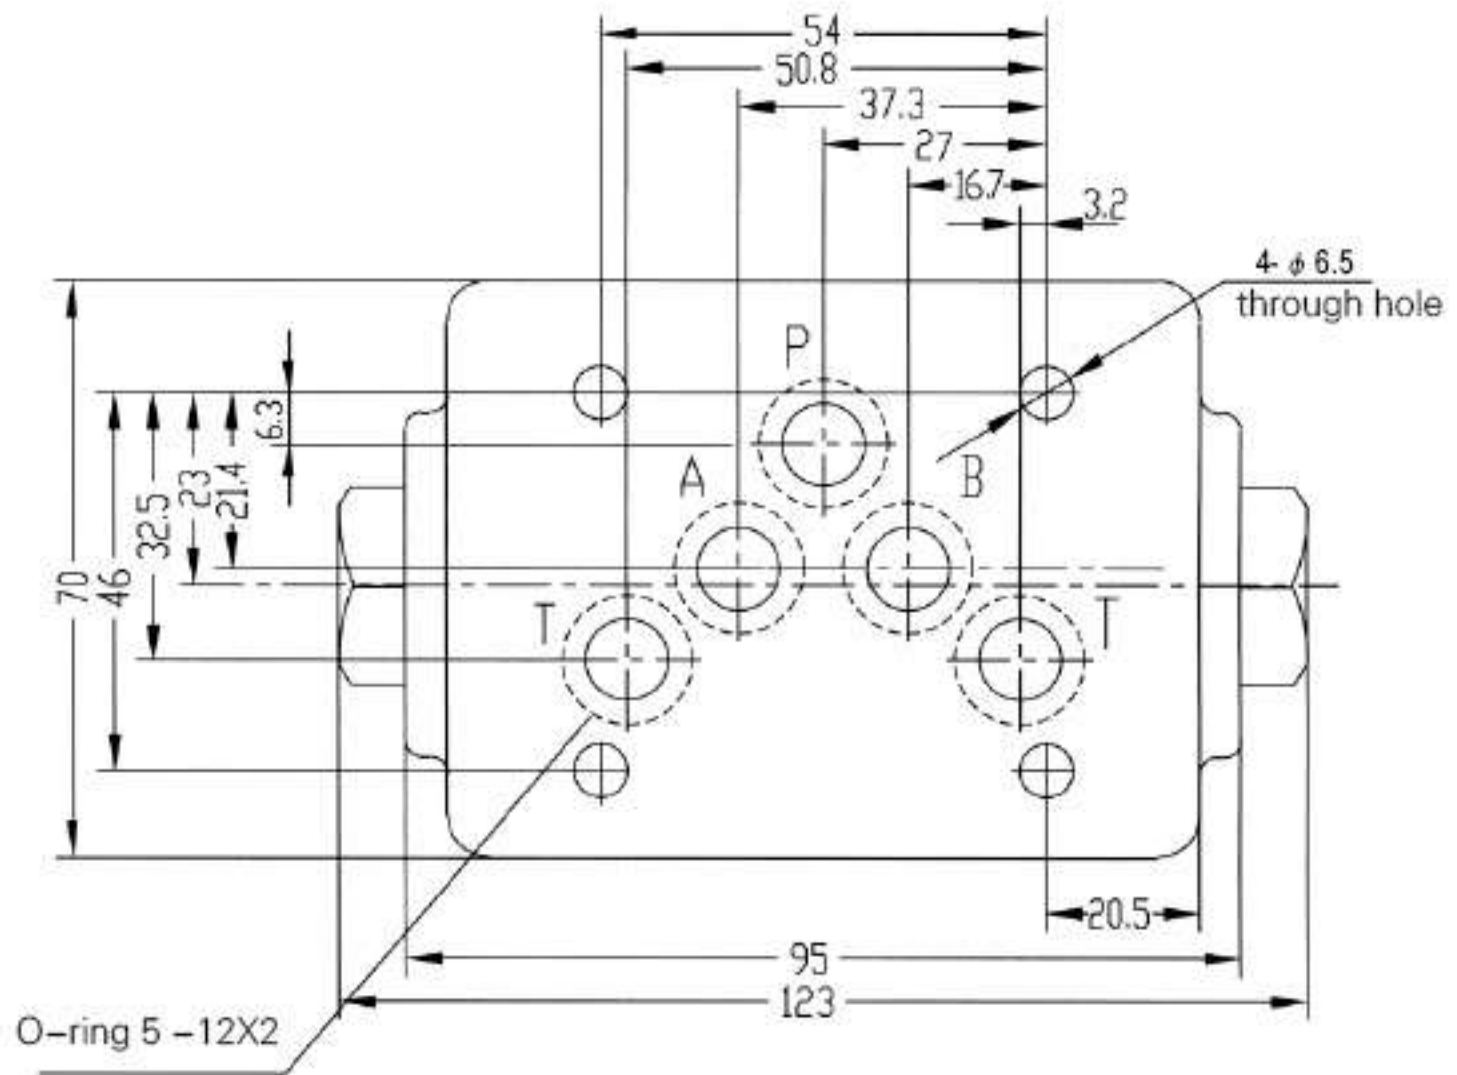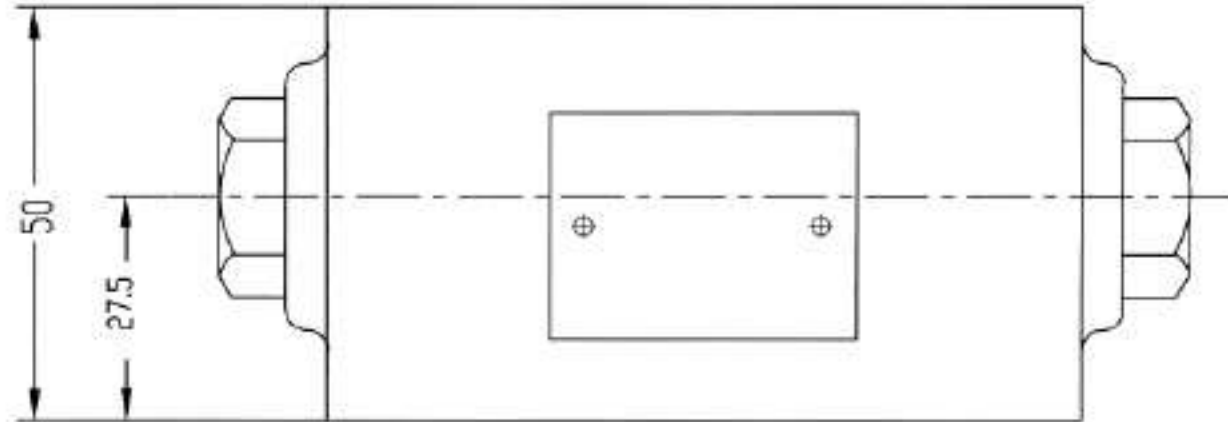

Unit dimensions


(Dimensions in mm)

Size16

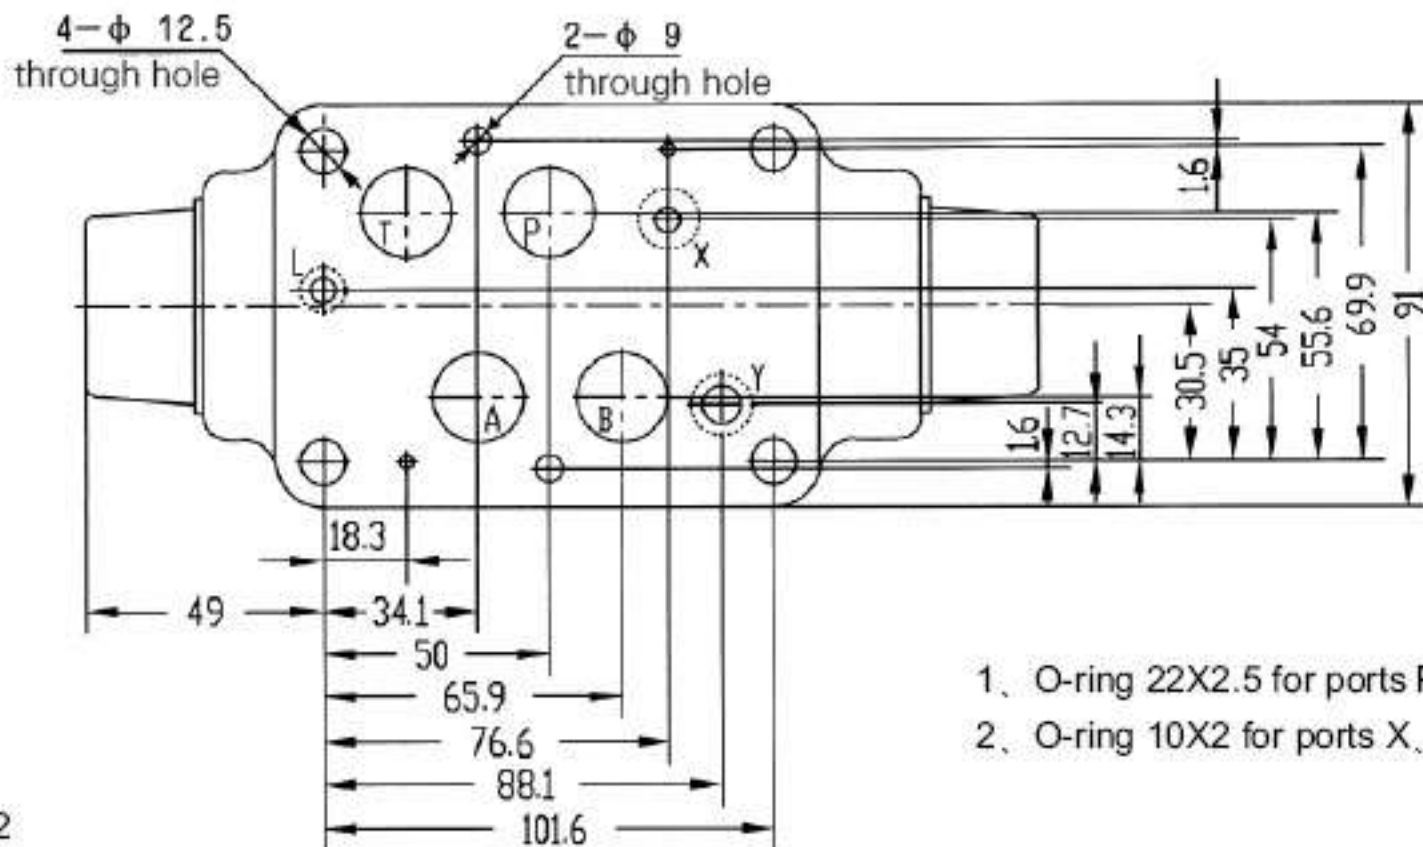
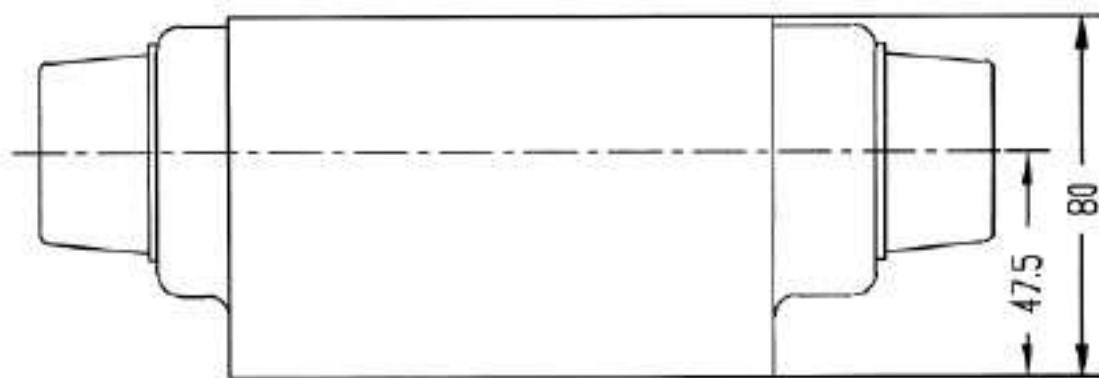


1. O-ring 22X2.5 for ports P, A, B, T
2. O-ring 10X2 for ports X, Y, L

Size22

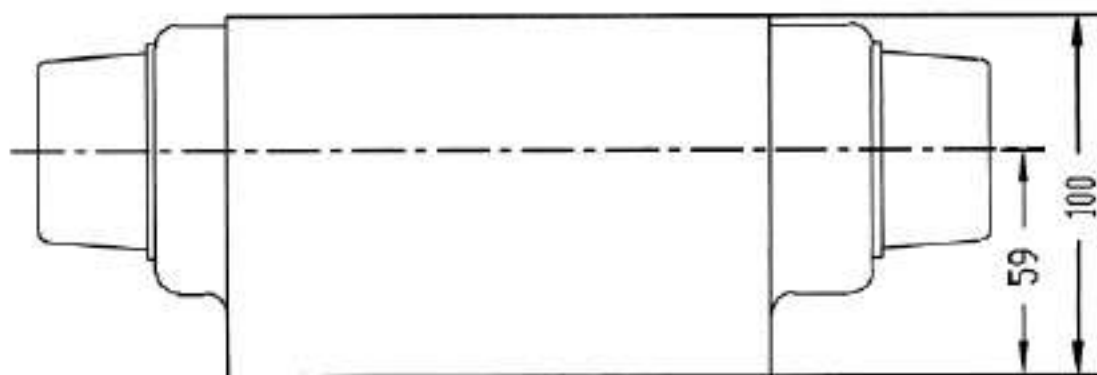

Required surface finish of mating piece

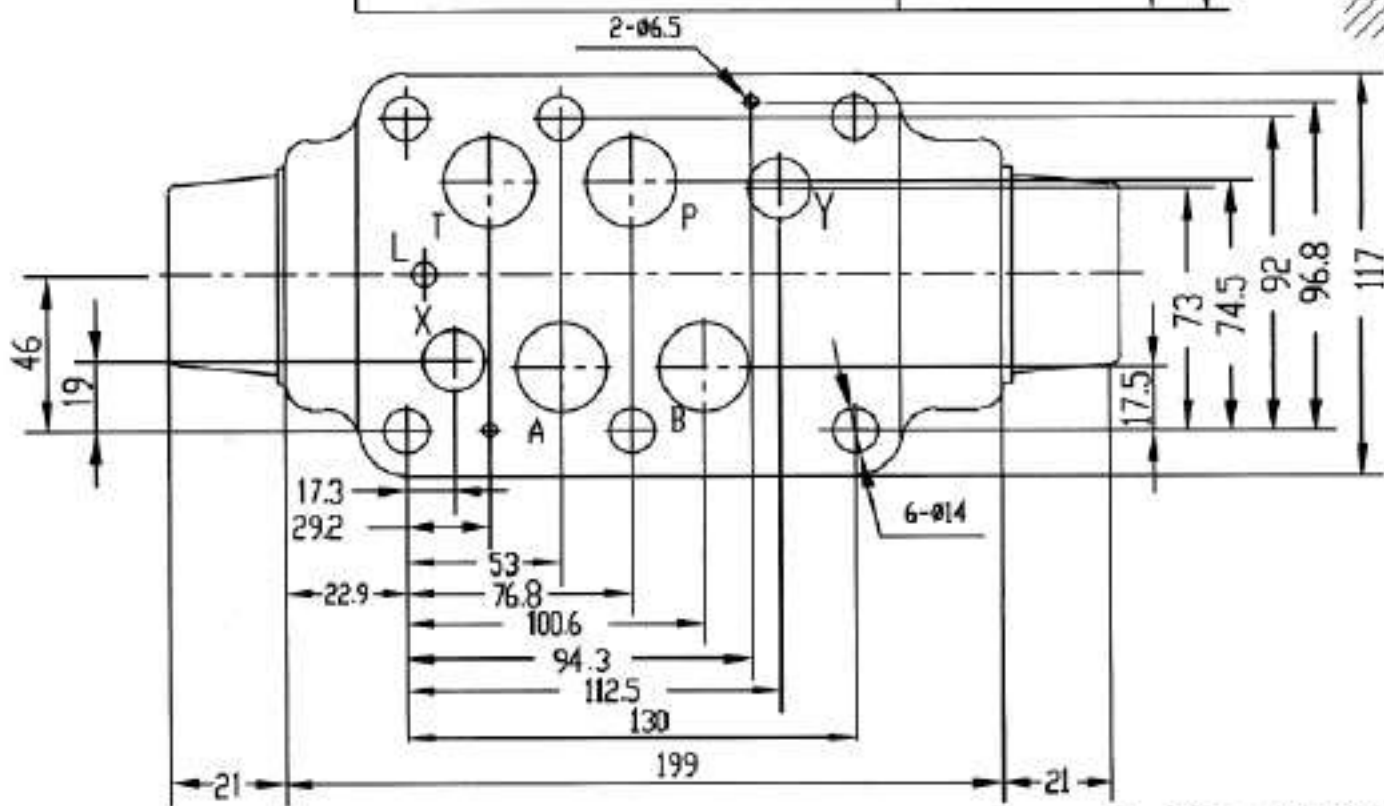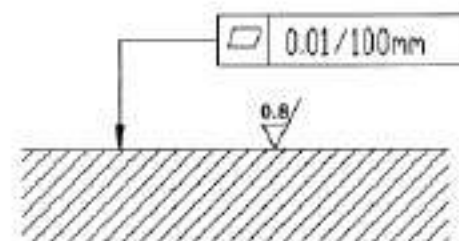

1. O-ring 27X3 for ports P, A, B, T
2. O-ring 19X3 for ports X, Y, L

**BEIJING HUADE
HYDRAULIC INDUSTRIAL
GROUP CO.,LTD.**

**Pilot operated Check valve sandwich
plate Type Z2S (New Series)**

RE 21601/12.2004

Size 6, 10
16, 22

up to 31.5 MPa

up to 450L/min

Features:

- For use in vertical stacking assemblies
- For the leak free closure of one or two service ports
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Functional, section



Hydraulic pilot operated check valves type Z2S are of sandwich plate design.

They are used for the leak-free closure of one or two service ports, even for long periods of time.

Free flow occurs from A1 to A2 or B1 to B2. Flow in the opposite direction is blocked.

When fluid flows from A1 to A2, the spool (1) is pressured and is pushed to the right, thereby opening the ball poppet valve (2) which then opens the poppet (3).


In order to ensure correct closing of the valve, the service ports of the directional valve must be connected to tank in the neutral position.

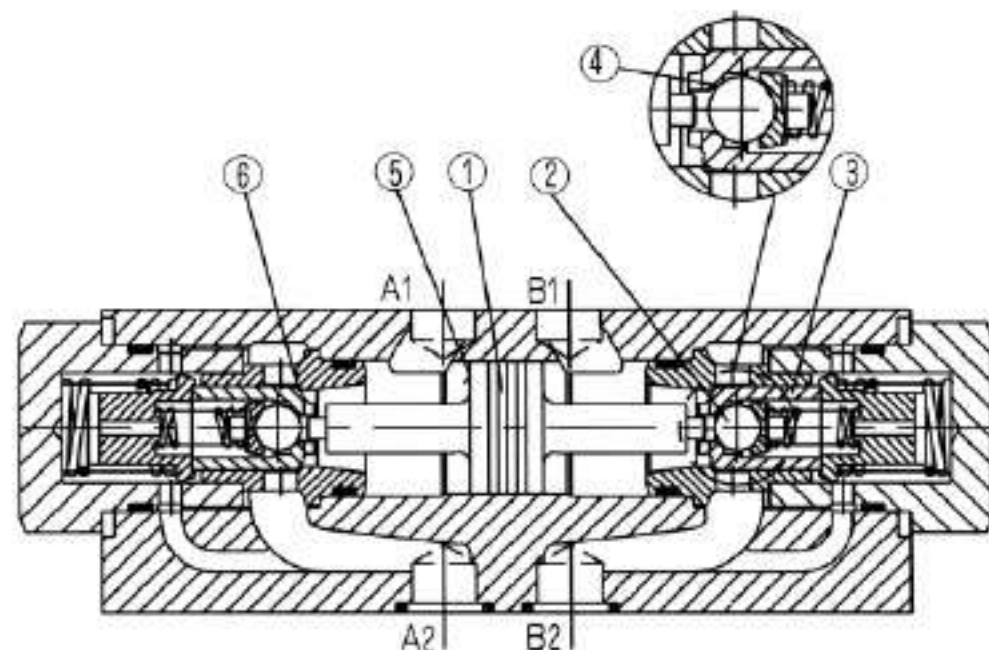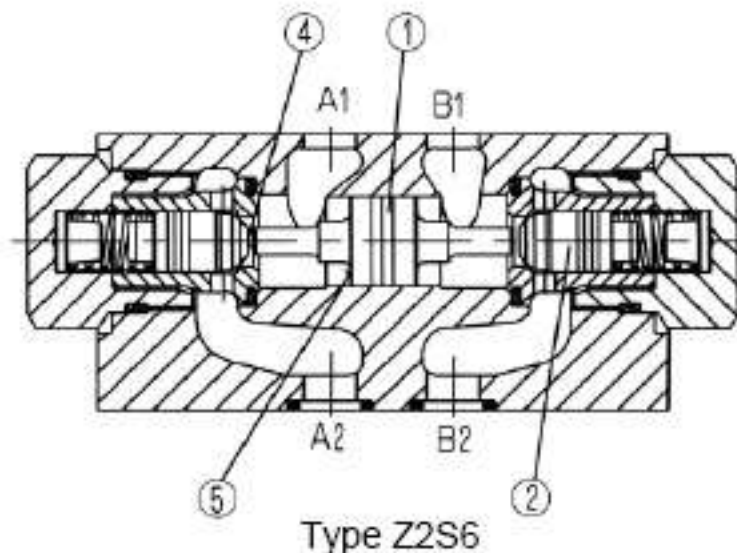

- 1 Spool
- 2 Ball poppet valve
- 3 Poppet
- 4 Area A1
- 5 Area A2
- 6 Area A3


Type Z2S10

Typical circuit example

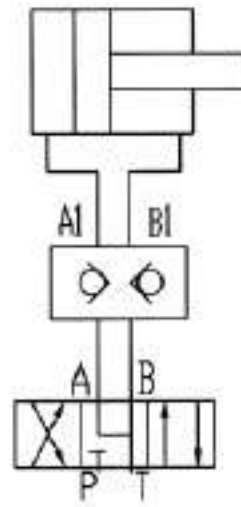


Symbols


Z2S.../




Z2S...A.../



Z2S...B.../



Ordering details



Size6	= 6
Size10	= 10
Size16	= 16
Size22	= 22

Further details in clear text

No code = Mineral oils

V = Phosphate ester

B = The technology of Beijing Huade Hydraulic

30 = Series 30 to 39 (Apply to size 10)

(30 to 39: unchanged installation and connection dimensions)

50 = Series 50 to 59 (Apply to size 16,22)

(50 to 59: unchanged installation and connection dimensions)

60 = Series 60 to 69 (Apply to size 6)

(60 to 69: unchanged installation and connection dimensions)

Leak free closure of ports A and B = No code

Leak free closure of port A = A

Leak free closure of port B = B

1 = Cracking pressure 0.15MPa (only for size6, 10)

Cracking pressure 0.3MPa (only for size16, 22)

2 = Cracking pressure 0.3MPa

Cracking pressure 0.5MPa (only for size 16,22)

3 = Cracking pressure 0.6MPa (only for size10)

Cracking pressure 0.7MPa (only for 6)

Cracking pressure 0.75MPa (only for 16, 22)

4 = Cracking pressure 1.0MPa (only for 10, 16, 22)

Technical data

Size		6	10	16	22
Max. flow L/min	(L/min)	to 60	to 120	to 300	to 450
Max. operating pressure	(MPa)	31.5			
Cracking pressure	(MPa)	see curve			
Directions		see symbols			
Area ratio		A1/A2=1.3	A1/A2=1.1145	A1/A2=1.118	A1/A2=1.136
			A3/A2=1.286	A3/A2=1.28	A3/A2=1.28
Pressure fluid		Mineral oils(for NBR seal) or phosphate ester(for FPM seal)			
Pressure fluid temperature range	(°C)	-30 to +80			
Viscosity range	(mm ² /s)	2.8 to 500			
Weight	(kg)	approx. 0.8	approx. 3	approx. 6.5	approx. 12


Characteristic curves (measured at $\nu = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ °C}$)

Type Z2S6

— = A1 → A2; B1 → B2

..... = A2 → A1; B2 → B1

1. Cracking pressure 1=0.15MPa
2. Cracking pressure 2=0.3MPa
3. Cracking pressure 3=0.7MPa
4. Through check valve cartridge
5. Flow freely
(Without check valve cartridge type "A" and type "B")

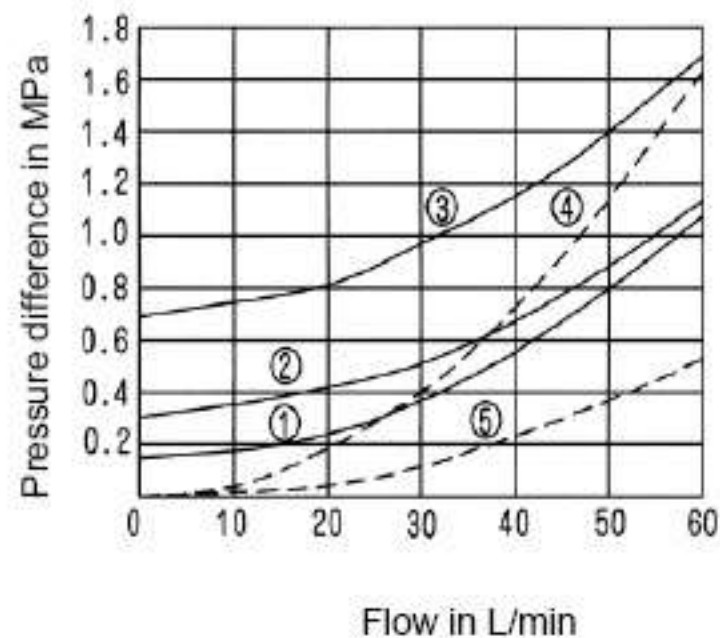


Type Z2S10

— = A1 → A2; B1 → B2


..... = A2 → A1; B2 → B1

1. Cracking pressure 1 =0.15MPa
2. Cracking pressure 2 =0.3MPa
3. Cracking pressure 3 =0.6MPa
4. Cracking pressure 4 =1.0MPa

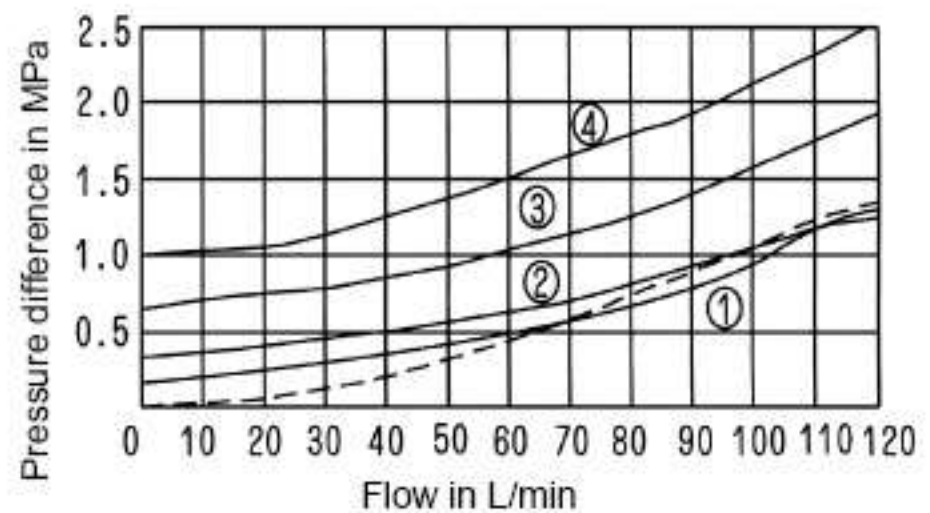


Type Z2S16

— = A1 → A2, B1 → B2
 - - - = A2 → A1, B2 → B1

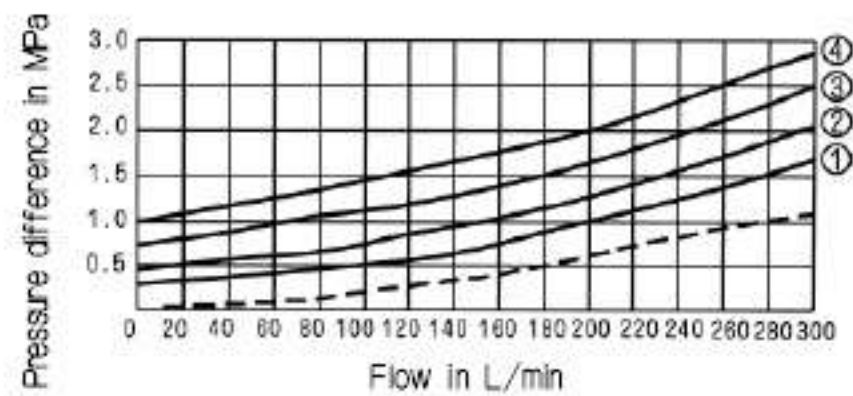

Type Z2S22


— = A1 → A2, B1 → B2
 - - - = A2 → A1, B2 → B1

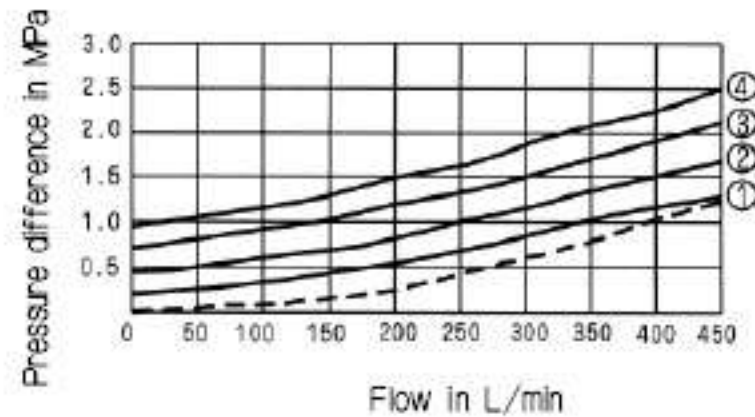

Unit dimensions

(Dimensions in mm)

Size6


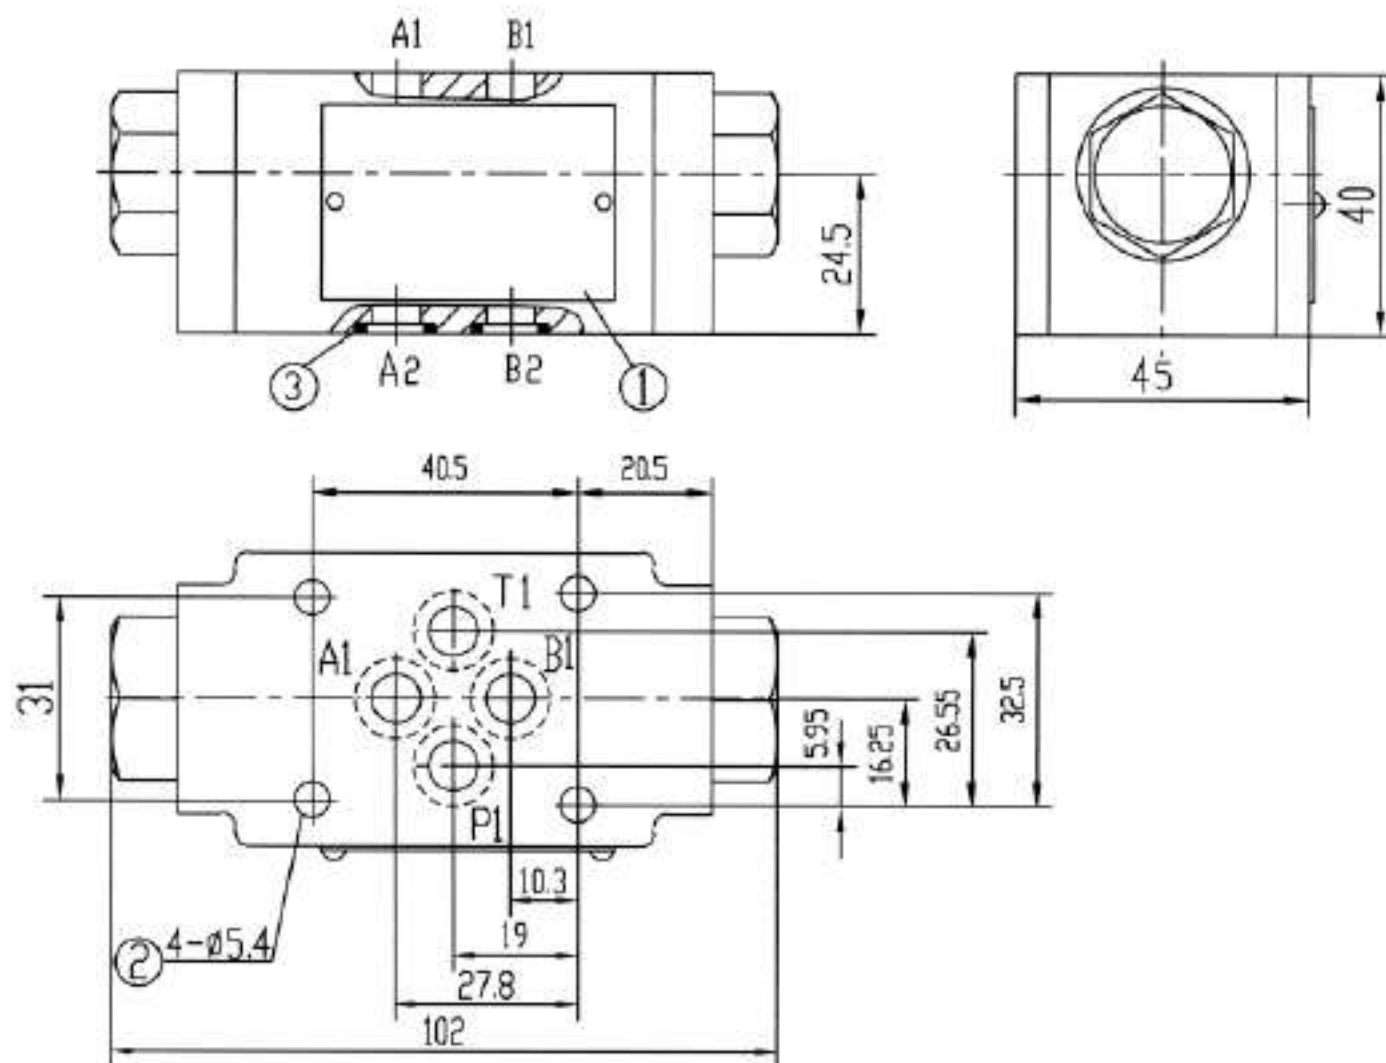


1. Name plate
2. Holes for mounting
3. O-rings 9.25 x 1.78 for four ports
 Valve fixing screws 4 - M5 - 10.9
 (GB/T70.1-2000)
 Screw torque: $M_A = 8.9 \text{ Nm}$

Unit dimensions


(Dimensions in mm)

Size10

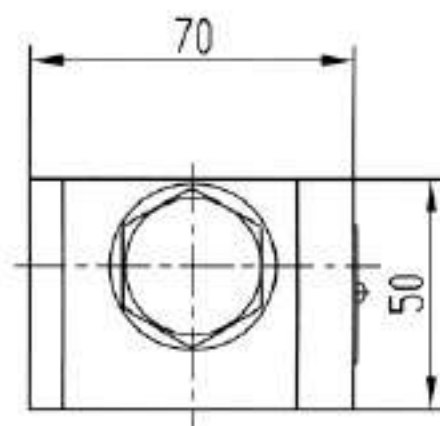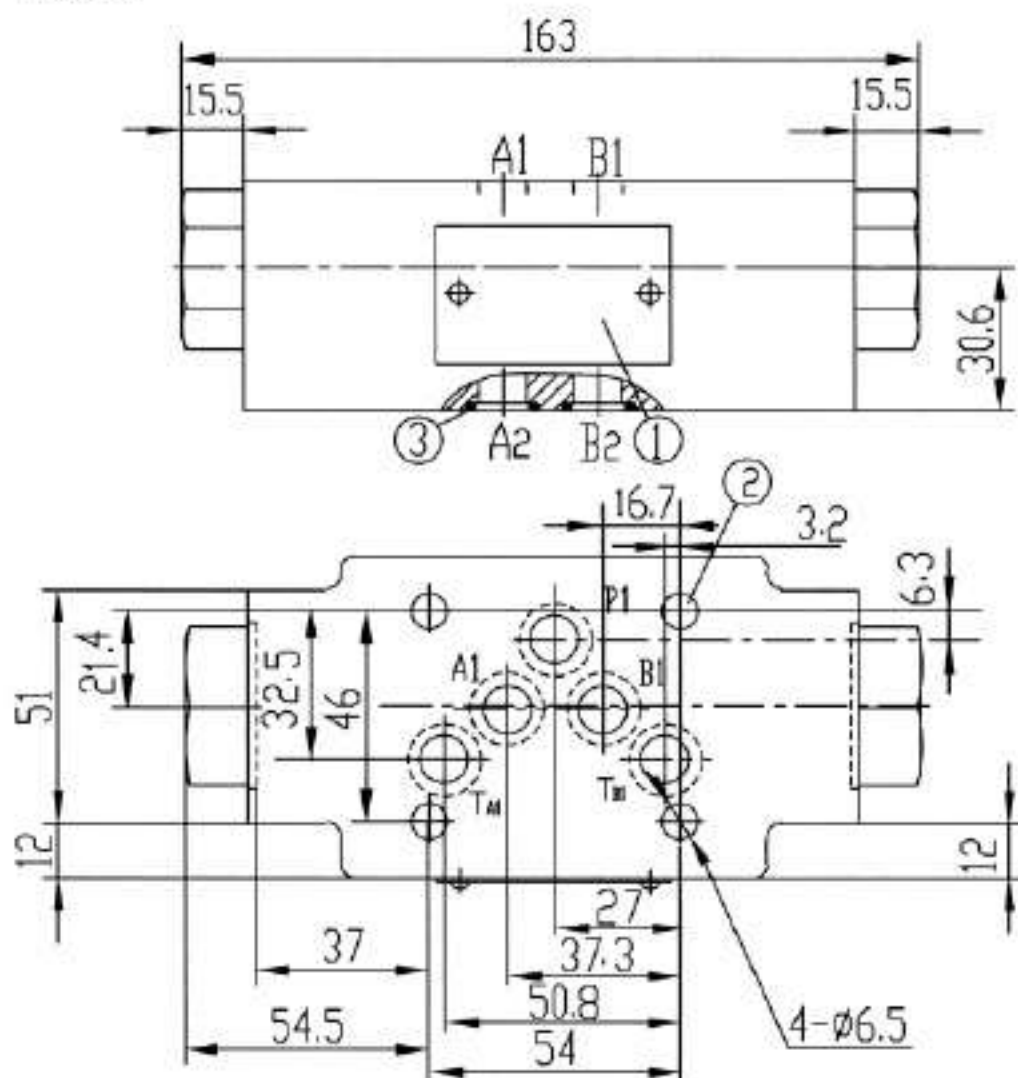


1. Nameplate
2. Holes for mounting
4 - $\phi 6.5$
3. O-rings 12x 2 for 5 ports
P, A, B, T_{A1} , T_{B1}
Valve fixing screws
4-M6 -10.9
(GB/T70.1-2000)
Screw torque: $M_A=15.5\text{Nm}$

Size16

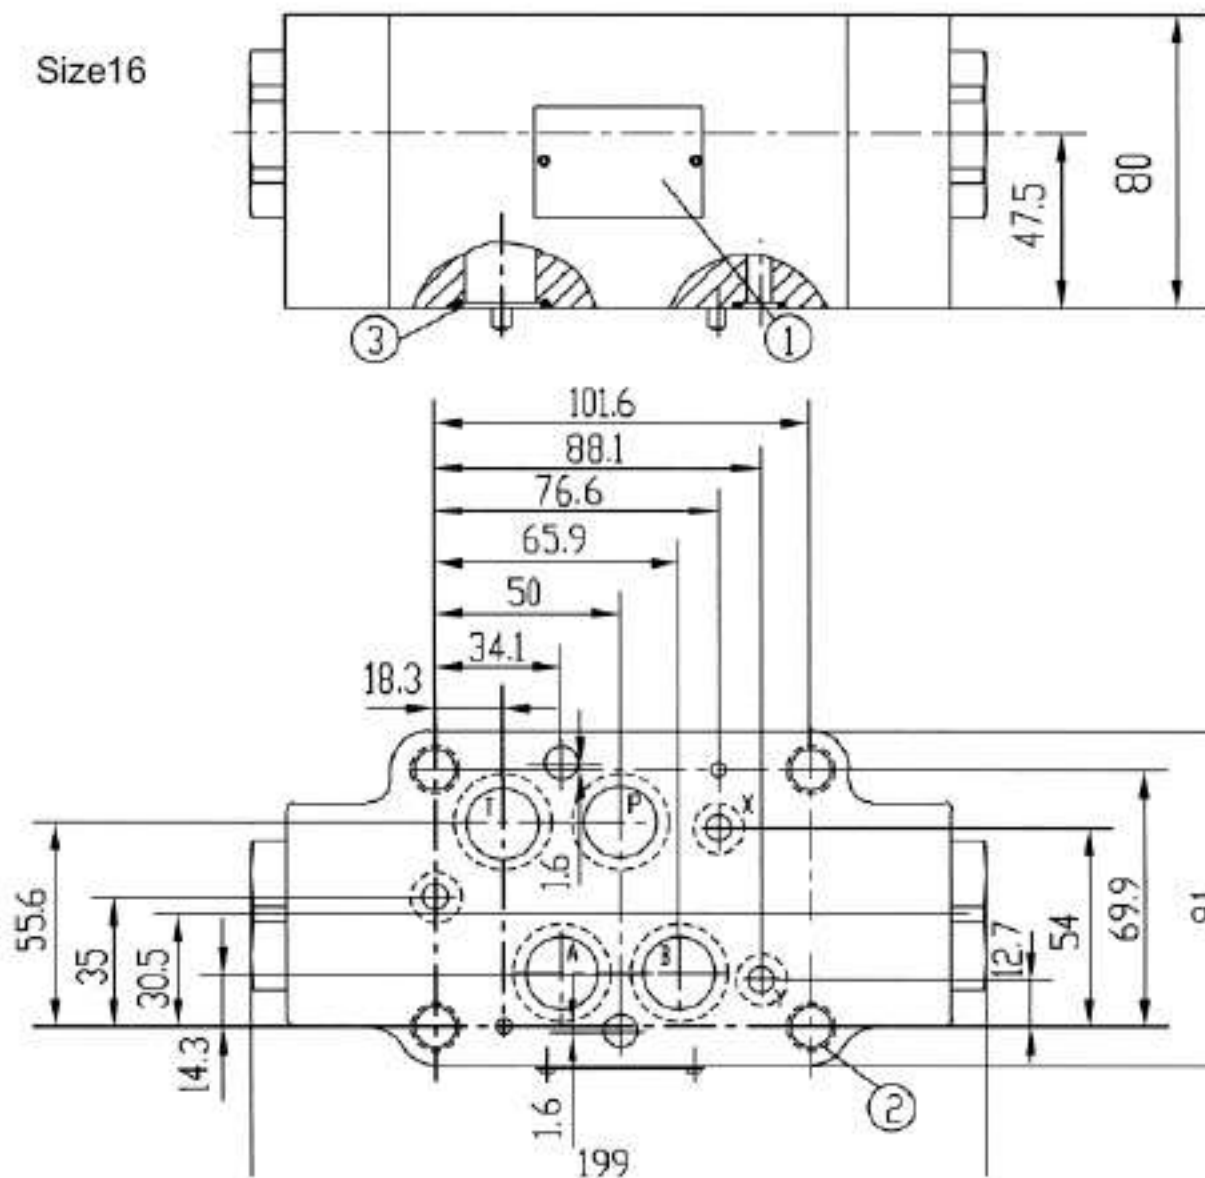


1. Nameplate
2. Holes for mounting
3. O-rings 22x 2.5 for ports
P, A, B, T
10X2 for ports X, Y, L
Valve fixing screws:
① 4-M10 -10.9
(GB/T70.1-2000)
Screw torque: $M_A=75\text{Nm}$
② 2-M6 -10.9
(GB/T70.1-2000)
Screw torque: $M_A=15.5\text{Nm}$

Size22

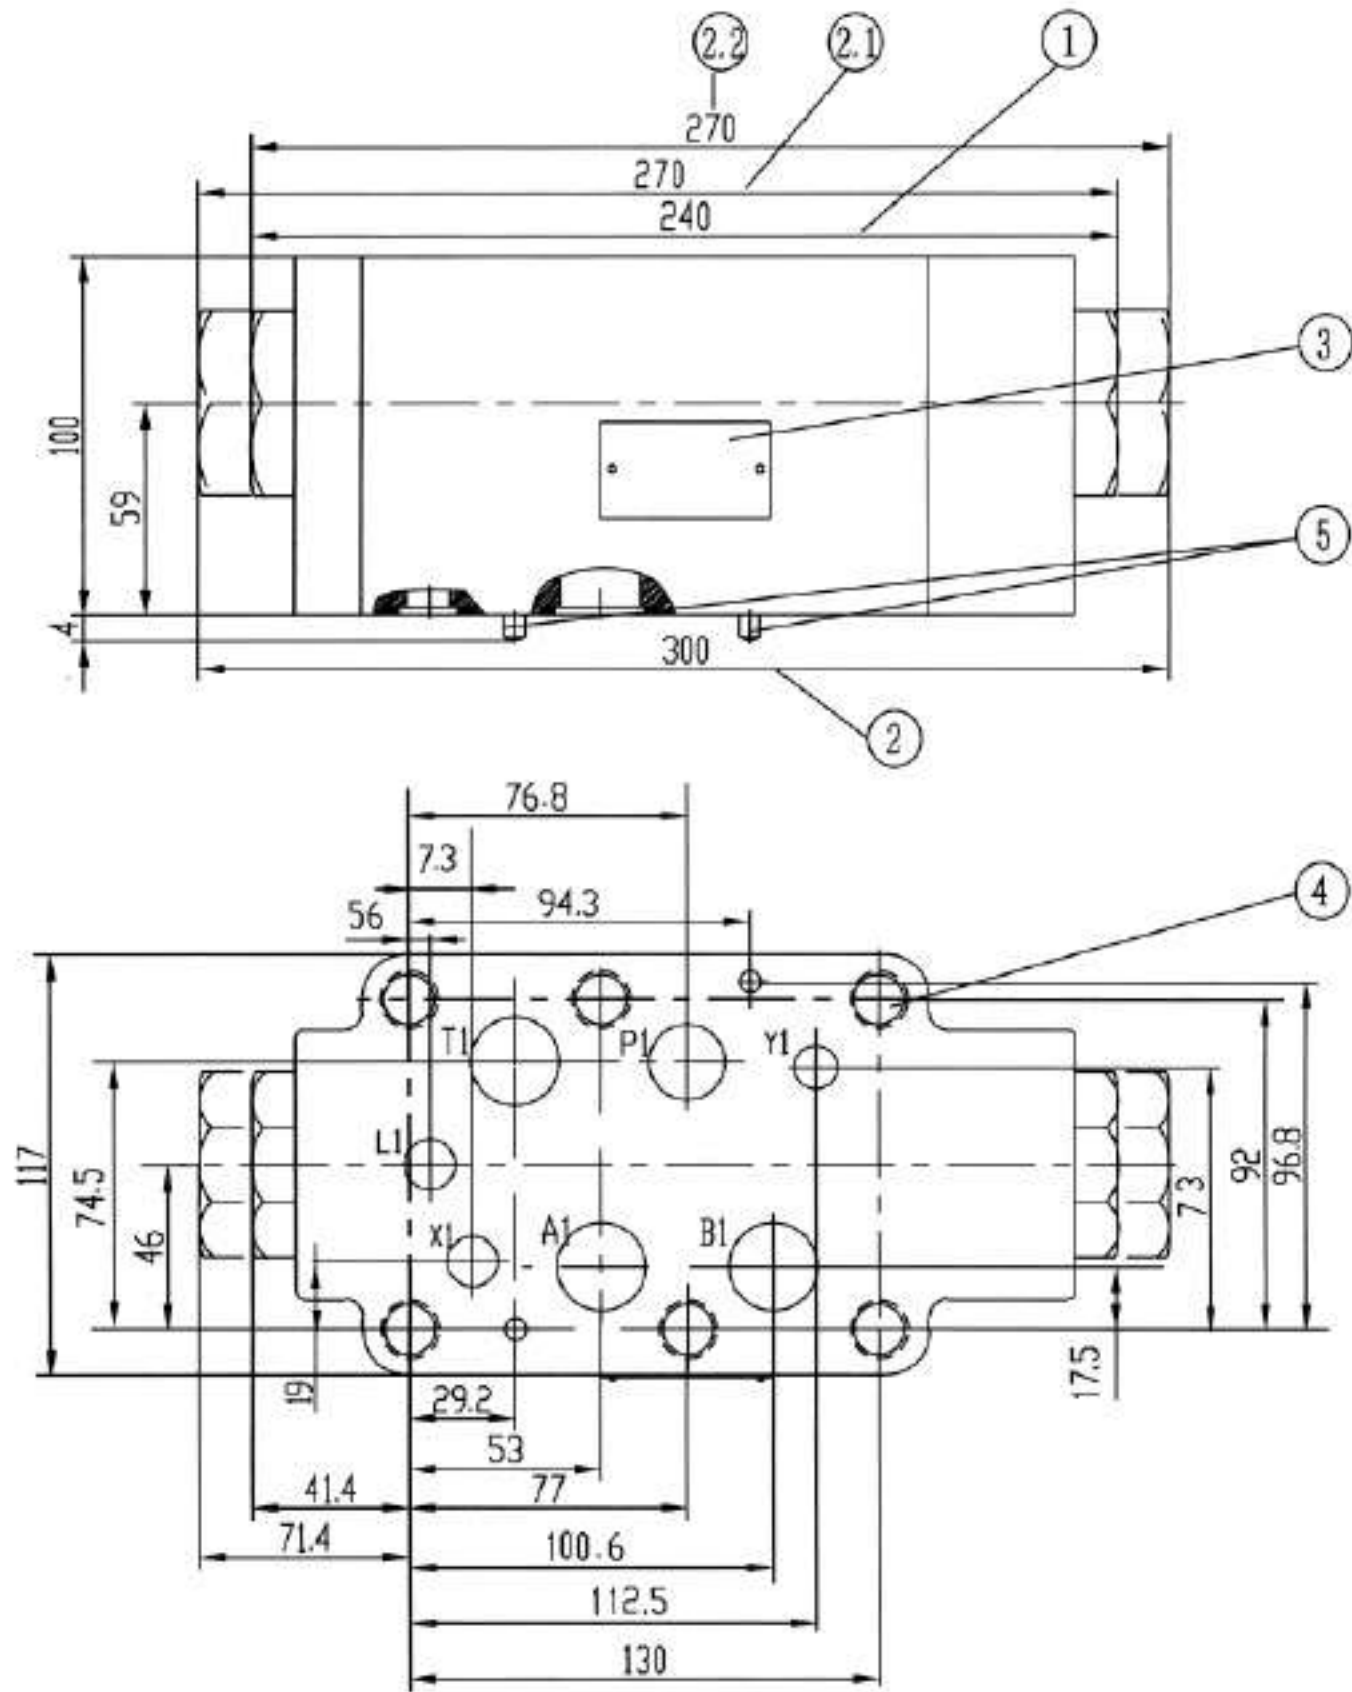

- 1 Cracking pressure 0.3MPa or 0.5MPa , Leak free closure of ports A and B
- 2 Cracking pressure 0.75MPa or 1.0MPa , Leak free closure of ports A and B
- 2.1 Cracking pressure 0.75MPa or 1.0MPa , Leak free closure of port A
- 2.2 Cracking pressure 0.75MPa or 1.0MPa , Leak free closure of port B
- 3 Label plate
- 4 Valve fixing screws:
6- M14-10.9 (GB/T70.1-2000) ,
Screw torque: $M_A=205Nm$
- 5 Fixing pin

Required surface finish of mating piece

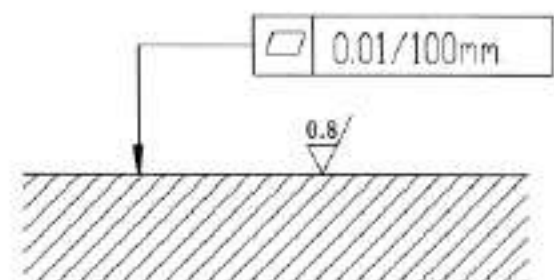

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Pilot operated check valves, Types SV and SL...30B/			RE 21467/12.2004
	size 10 to 30	up to 31.5 MPa	up to 400L/min	Replaces; RE 21467/05.2001

Features:

- Check valve controlled by fluid
- For subplate mounting, Mounting pattern to DIN 24 340
- Subplate or screw threaded connection
- With or without leakage port
- With or without pre-opening
- Type with pre-opening, dampened decompression
- 3 opening pressures



Function, section

SV and SL valves are hydraulic pilot operated check valves in poppet type design which may be opened to allow flow in either direction.

These valves are used for the isolation of operating circuits under pressure, as safeguard against the lowering of a load when a line break occurs or against creeping movements of hydraulically locked-in actuators.

Basically these valves consist of housing (1), poppet (2), compression spring (3), control spool (4) as well as a pre-opening, as poppet valve (5), optionally.

The valve enables free flow from A to B, in the counter direction the poppet (2) is held on its seat by the system pressure, additionally to the spring force.

Through the pressure connection at control port X the control piston (4) is moved to the right. This pushes the poppet (2) from the seat. Now the valve may also have a flow from B to A.

In order to ensure the proper opening of the valve via the control piston (4) a certain minimum control pressure is necessary


Type SV..A.. and SL..A.. (with pre-opening, section 1)

This valve has a additional pre-opening. Through pressure connection at control port X the control piston (4) is pushed to the right.


This first pushes the poppet (5) and then the poppet (2) from the seat. Now the valve may also have a flow from B to A. Because of the pre-opening there is a dampened decompression of the fluid under pressure. Through this possible pressure shocks are avoided.

Type SL... (with leakage port, section 2)

The function of this valve is principally the same as the valve SV. The difference is the additional leakage port Y. With this the annulus area of the control piston (4) is separated from port A. The pressure present at port A only effects area A₄ of the control piston (4).

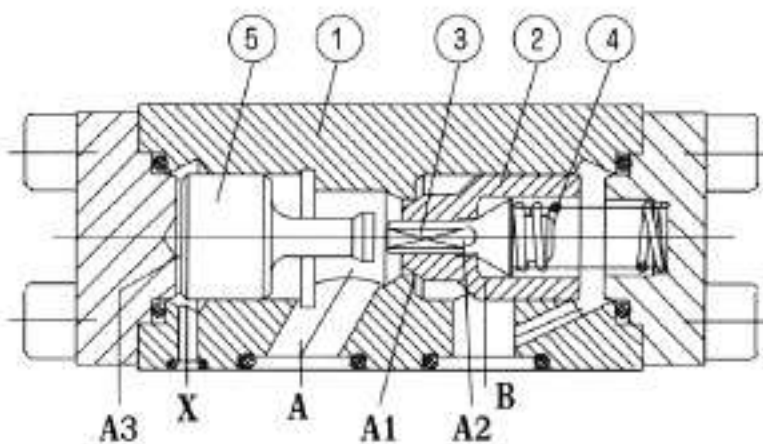

SV...PA (with pre-opening)

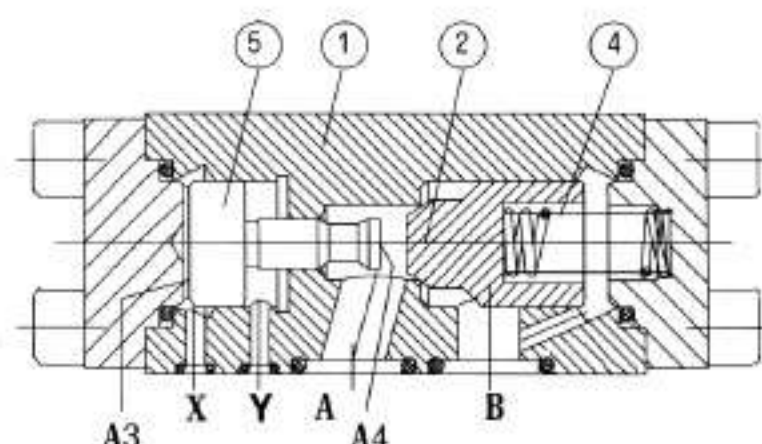


SL...PB (without pre-opening)

Type	A1 (cm ²)	A2 (cm ²)	A3 (cm ²)	A4 (cm ²)
SV/SL10	1.13	0.28	3.15	0.50
SV/SL20	3.14	0.78	9.62	1.13
SV/SL30	5.30	1.33	15.9	1.54


Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

Pressure difference / flow curves


SV/SL10

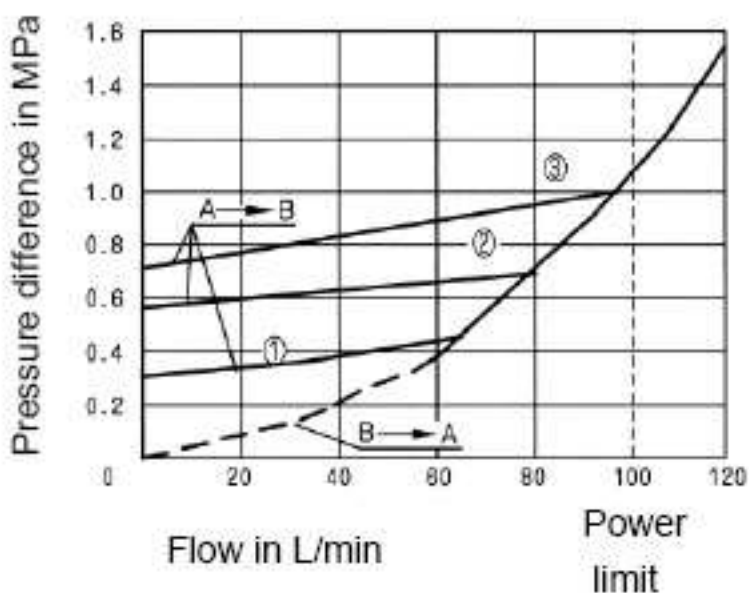

SV/SL20

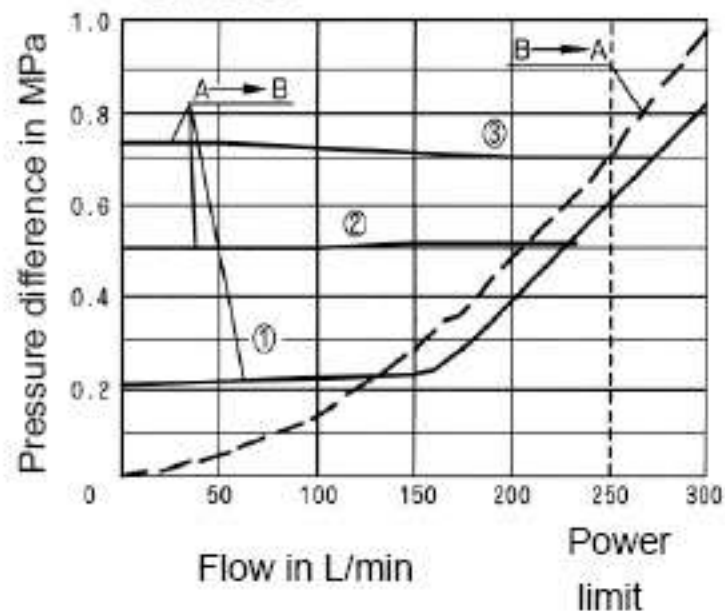


SV/SL30

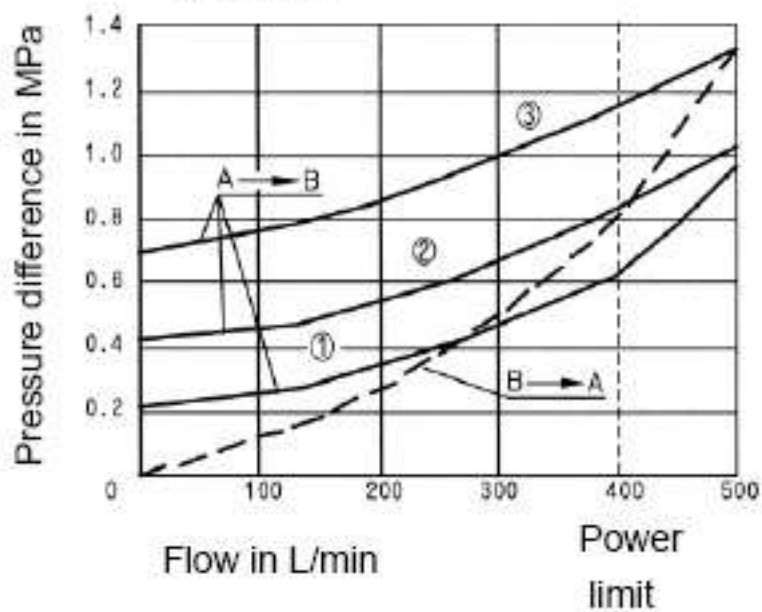


Curve one ,two and three are corresponding to one, two and three in the ordering code

Control pressure / Load pressure curves

SV/SL...PB...

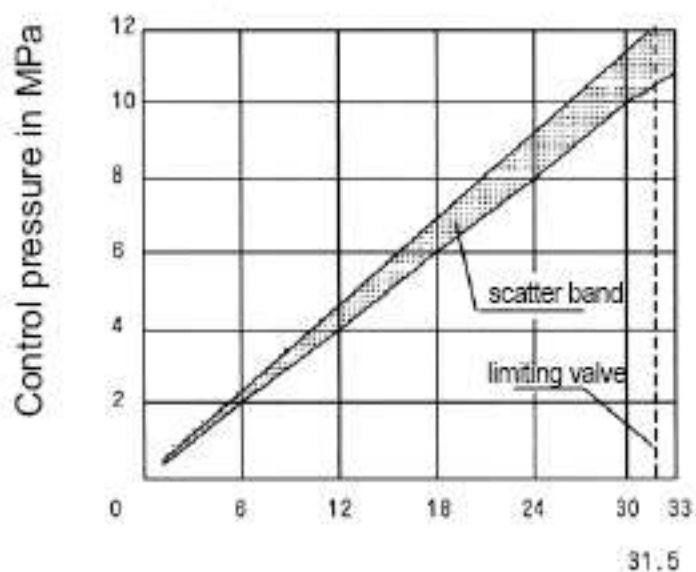

SV/SL...PA...

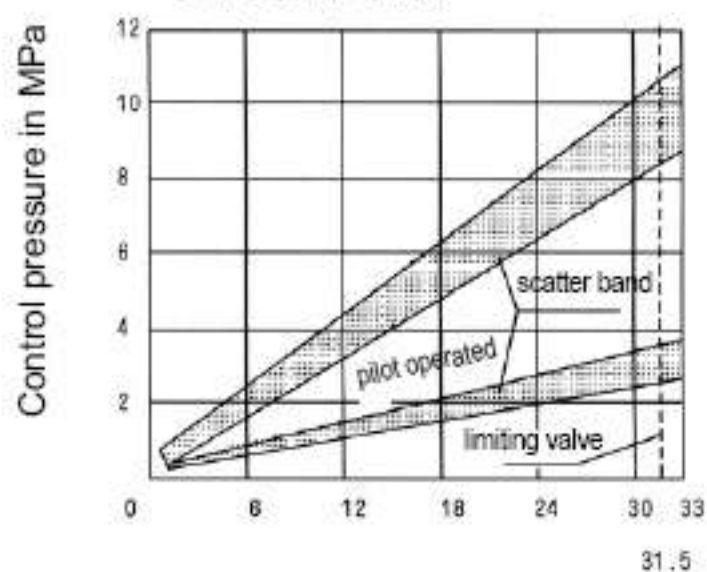


Load pressure in MPa

Load pressure in MPa

Unit dimensions: for threaded connection

(Dimensions in mm)

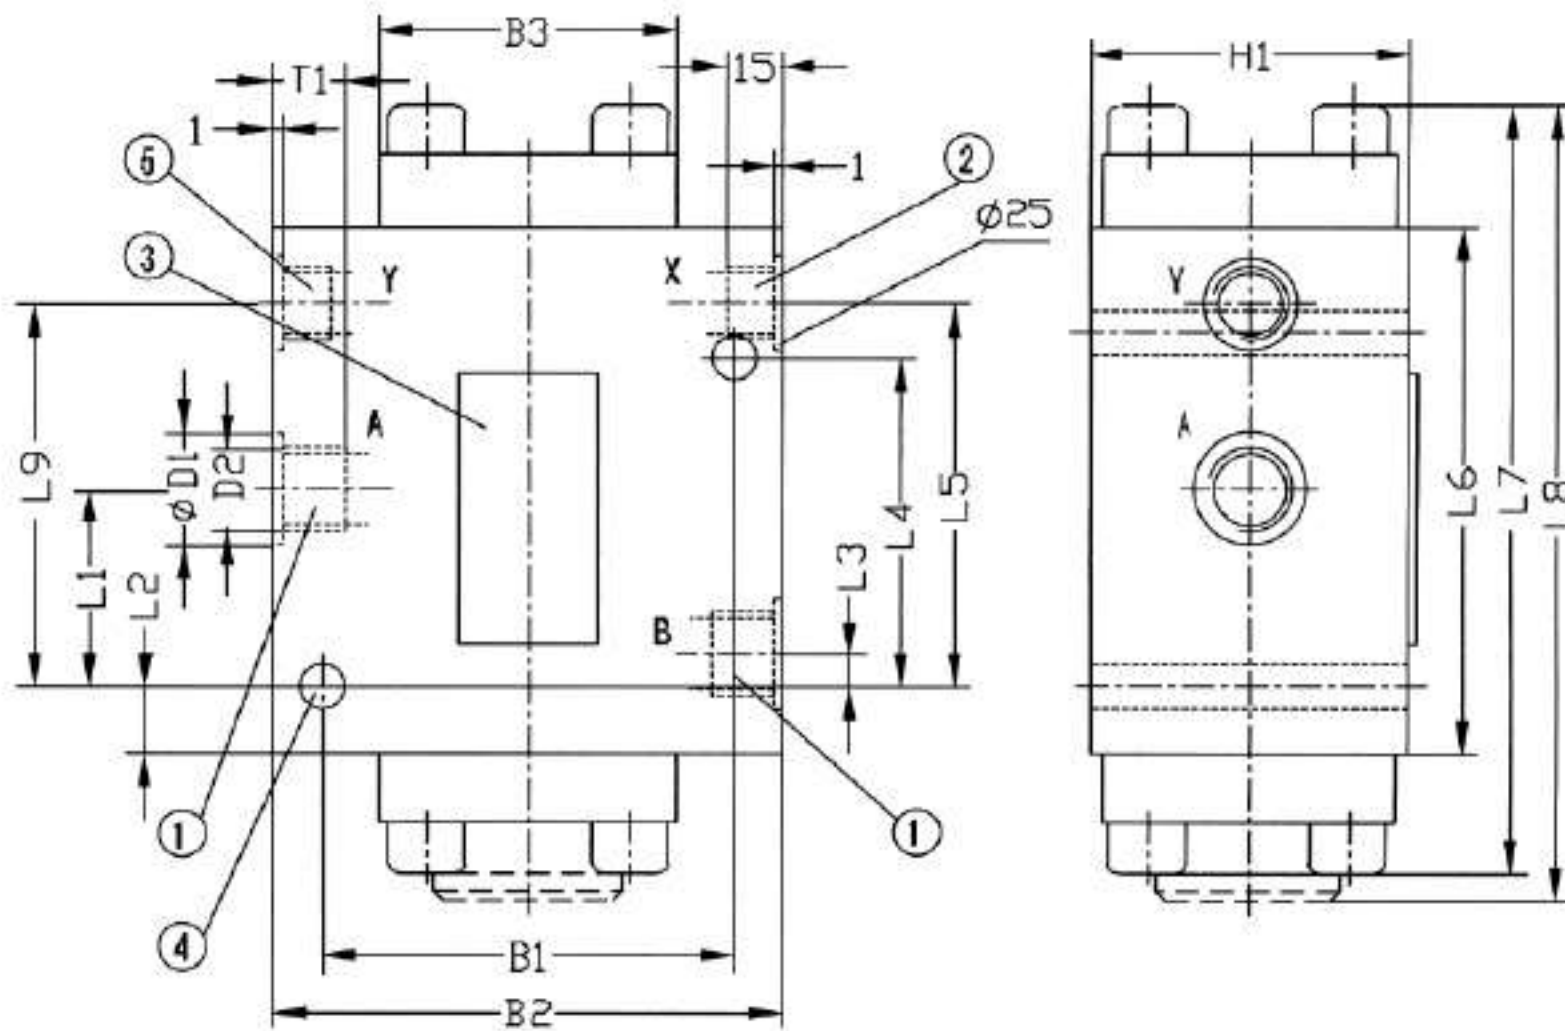


Type		B1	B2	B3	Φ D1	D2
SV	10	66.5	85	40	34	G1/2" or M22X1.5
	15	79.5	100	55	47	G3/4" or M27X2
	20	79.5	100	55	47	G1" or M33X2
	25	97	120	70	65	G1 1/4" or M42X2
	30	97	120	70	65	G1 1/2" or M48X2
SL	10	66.5	85	40	34	G1/2" or M22X1.5
	15	79.5	100	55	47	G3/4" or M27X2
	20	79.5	100	55	47	G1" or M33X2
	25	97	120	70	65	G1 1/4" or M42X2
	30	97	120	70	65	G1 1/2" or M48X2

- 1, Ports A and B
- 2, Port X, G1/4 " or M14X1.5
- 3, Name plate
- 4, Valve fixing holes Φ 10.5
- 5, Port Y, G1/4 " or M14X1.5
- * Valve with cracking pressure "1" and "2" (dimension L7)
- * Valve with cracking pressure "3" (dimension L8)

Type		H1	L1	L2	L3	L4	L5	L6	L7	L8	L9	T1
SV	10	42	27.5	18.5	10.5	33.5	49	80	116	116	-	14
	15	57	36.5	17.5	13	50.5	67.5	95	135	146	-	16
	20	57	36.5	17.5	13	50.5	67.5	95	135	146	-	18
	25	75	54.5	15.5	20.5	73.5	89.5	115	169	179	-	20
	30	75	54.5	15.5	20.5	73.5	89.5	115	169	179	-	22
SL	10	42	22.5	18.5	10.5	33.5	49	80	116	116	51.5	14
	15	57	30.5	17.5	13	50.5	72.5	100	140	151	72.5	16
	20	57	30.5	17.5	13	50.5	72.5	100	140	151	72.5	18
	25	75	51	15.5	20	84	99.5	125	179	189	99.5	20
	30	75	51	15.5	20	84	99.5	125	179	189	99.5	22

Unit dimensions: for subplate mounting


(Dimensions in mm)

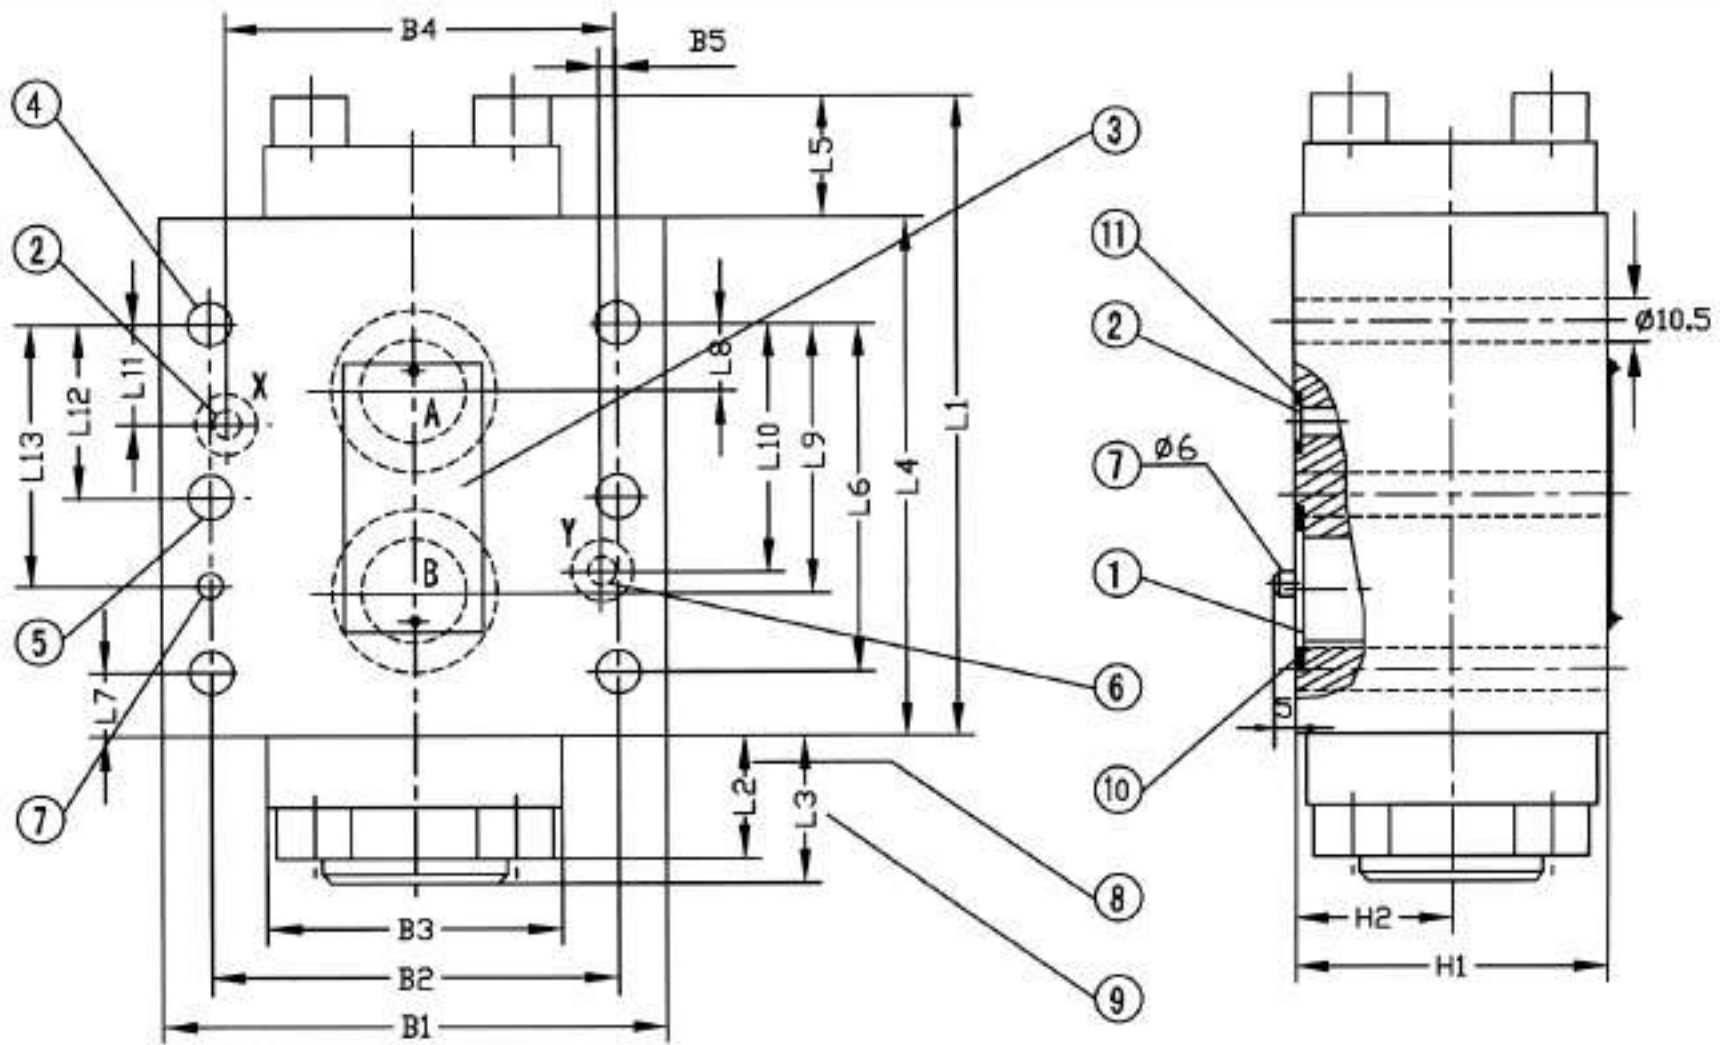

- 1. Inlet ports A and B
- 2. Port X
- 3. Nameplate
- 4. 4 fixing holes with type SV/SL 10 SV/SL 20 valve
- 5. 6 fixing holes with type SV/SL 30 valve
- 6. Port Y with valve type "SL"
(with valve type "SV" this port is closed)
- 7. Fixing pin
- 8. Valve with cracking pressure types "1" and "2" (dimension L2)
- 9. Valve with cracking pressure types "3" (dimension L3)
- 10. O-ring
For ports A and B
O-ring 15 × 3 (size10)
O-ring 24 × 3 (size20)
O-ring 34 × 3 (size30)

11 For ports X and Y
O-ring 10 × 2.5
(size10,20,30)

Required surface finish of mating piece

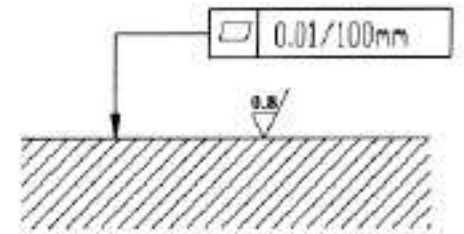

Valve fixing screw
(included in goods)
Size10
4 - M10 × 50-10.9 (GB/T70.1-2000)
Screw torque: $M_A = 75\text{Nm}$
Size20
4 - M10 × 70-10.9 (GB/T70.1-2000)
Screw torque: $M_A = 75\text{Nm}$
Size30
6 - M10 × 85-10.9 (GB/T70.1-2000)
Screw torque: $M_A = 75\text{Nm}$
Subplate:
Size10 G460/01(G3/8") G460/02(M18 × 1.5)
G461/01(G1/2") G461/02(M22 × 2)
Size20 G412/01(G3/4") G412/02(M27 × 2)
G413/01(G1") G413/02(M33 × 2)
Size30 G414/01(G1 1/4") G414/02(M42 × 2)
G415/01(G1 1/2") G415/02(M48 × 2)
must be ordered separately order.
see page 204

Type	Size	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
SV	10	98	18	18	80	18	43	18.5	7.2	35.8	-
	20	115	20	31	95	20	60.5	17.3	11.1	49.2	-
	30	144	29	35	115	29	84	15.5	16.5	67.5	-
SL	10	98	18	18	80	18	43	18.5	7.2	35.8	21.5
	20	115	20	31	100	20	60.5	17.3	11.1	49.2	39.7
	30	144	29	35	125	29	84	15.5	16.5	67.5	59.5

Type	Size	L11	L12	L13	B1	B2	B3	B4	B5	H1	H2
SV	10	21.5	-	$32_{-0.3}^0$	85	66.5	40	58.5	-	42	21
	20	20.6	-	$44.5_{-0.2}^0$	100	79.5	55	73	-	57	28.5
	30	24.5	42	$63_{-0.3}^0$	120	97	70	92.8	-	75	37.5
SL	10	21.5	-	$32_{-0.3}^0$	85	66.5	40	58.5	7.9	42	21
	20	20.6	-	$44.5_{-0.2}^0$	100	79.5	55	73	6.4	57	28.5
	30	24.5	42	$63_{-0.3}^0$	120	97	70	92.8	3.8	75	37.5

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Pilot operated check valves, Types SV and SL...40B/ (new series)			RE 21500/12.2004
	Size 10 to 32	up to 31.5 MPa	up to 550L/min	

Features:

- check valve controlled by fluid
- For subplate mounting, Mounting pattern to DIN 24 340
- Subplate or screw threaded connection
- With or without leakage port
- With or without pre-opening
- Type with pre-opening, dampened decompression
- 4 opening pressures
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Function, section, symbols

SV and SL valves are hydraulic pilot operated check valves in poppet type design which may be opened to allow flow in either direction.

These valves are used for the isolation of operating circuits under pressure, as safeguard against the lowering of a load when a line break occurs or against creeping movements of hydraulically locked-in actuators.

Basically these valves consist of housing (1), poppet (2), compression spring (3), control spool (4) as well as a preopening, as ball poppet valve (5), optionally.

The valve enables free flow from A to B, in the counter direction the poppet (2) is held on its seat by the system pressure, additionally to the spring force.

Through the pressure connection at control port X the control piston (4) is moved to the right. This pushes the poppet (2) from the seat. Now the valve may also have a flow from B to A.

In order to ensure the proper opening of the valve via the control piston (4) a certain minimum control pressure is necessary


Type SV..A.. and SL..A.. (with pre-opening, section 1)

This valve has a additional pre-opening. Through pressure connection at control port X the control piston (4) is pushed to the right.


This first pushes the ball (5) and then the poppet (2) from the seat. Now the valve may also have a flow from B to A. Because of the pre-opening there is a dampened decompression of the fluid under pressure. Through this possible pressure shocks are avoided.

Type SL... (with leakage port, section 2)

The function of this valve is principally the same as the valve SV. The difference is the additional leakage port Y. With this the annulus area of the control piston (4) is separated from port A. The pressure present at port A only effects area A₄ of the control piston (4).

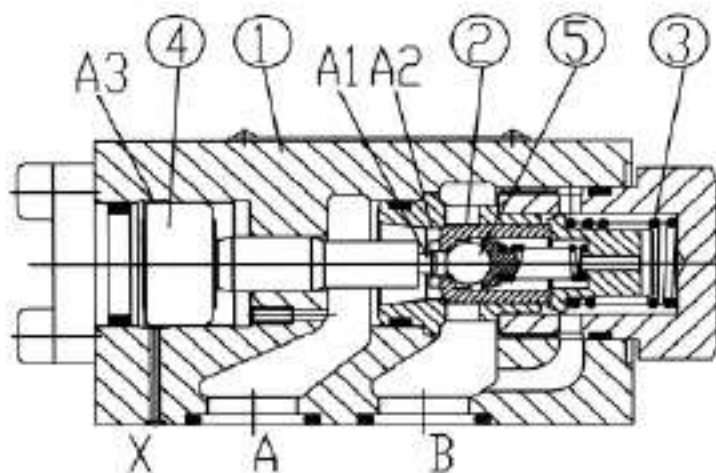


Type SV..PA (without leakage port, with pre-opening)

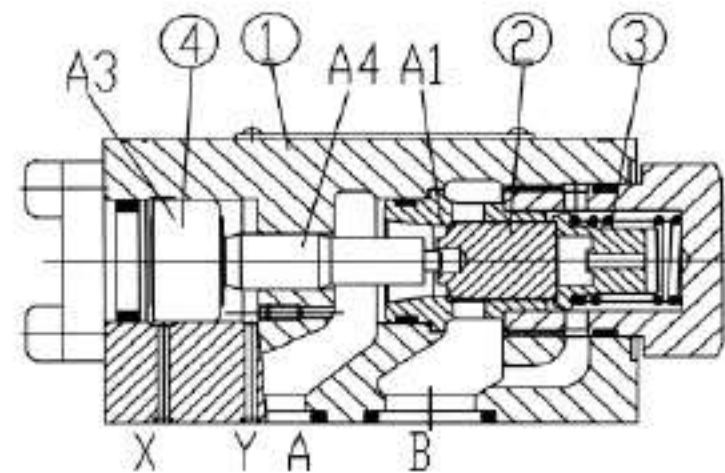


Type SL..PB (with leakage port, without pre-opening)







Symbols:
Type SV





Type SL



Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

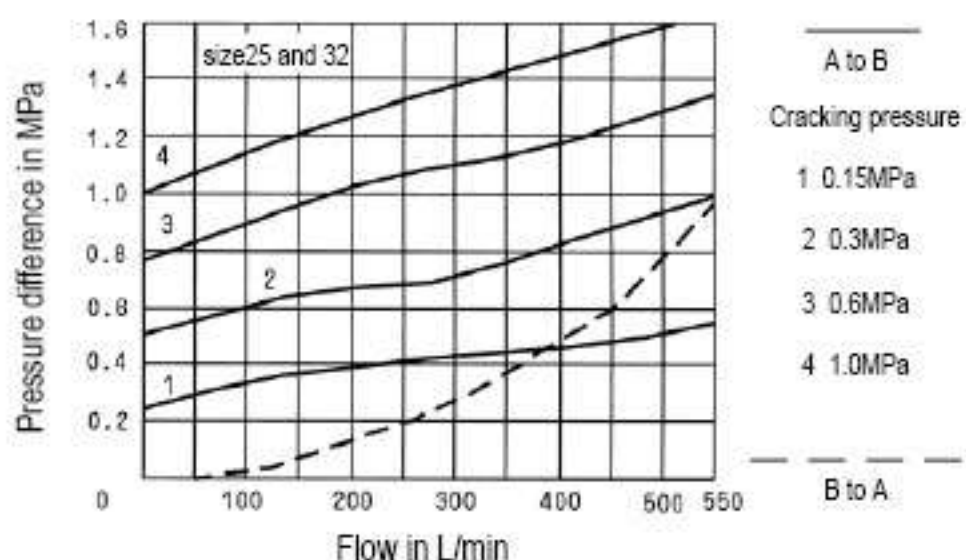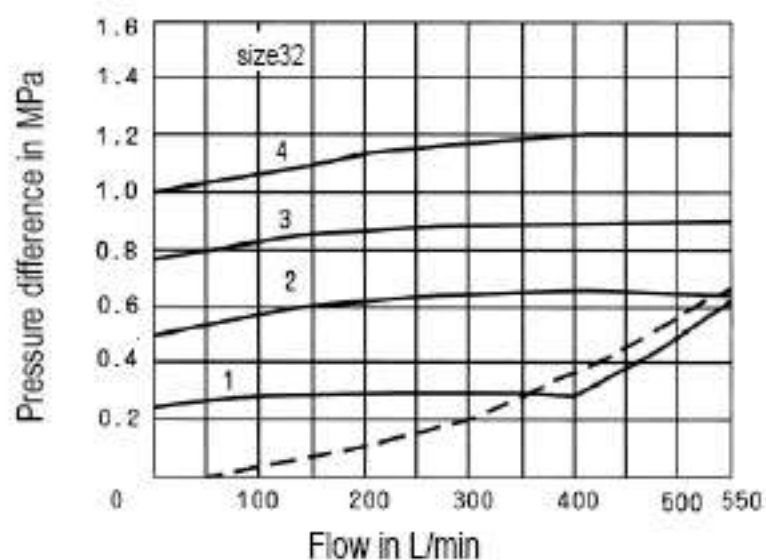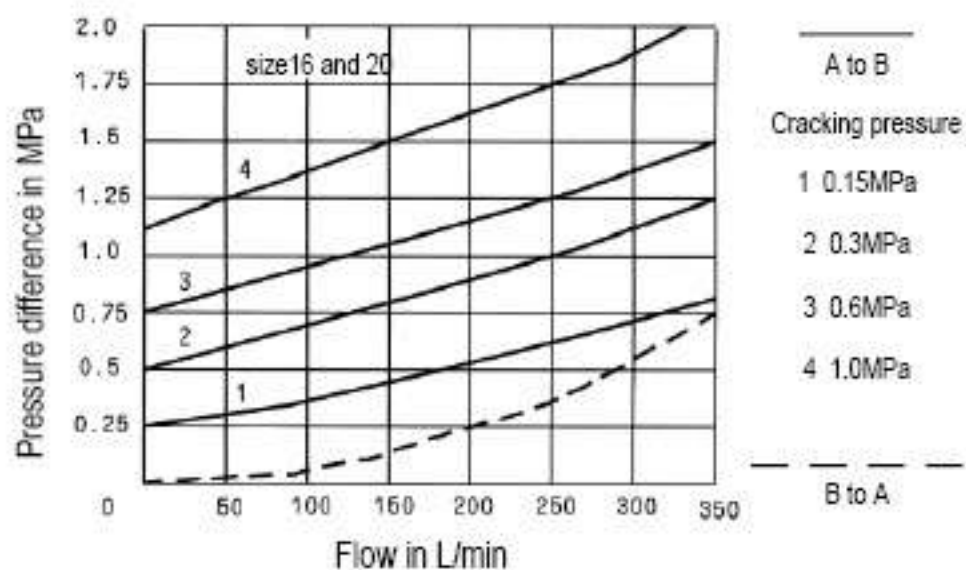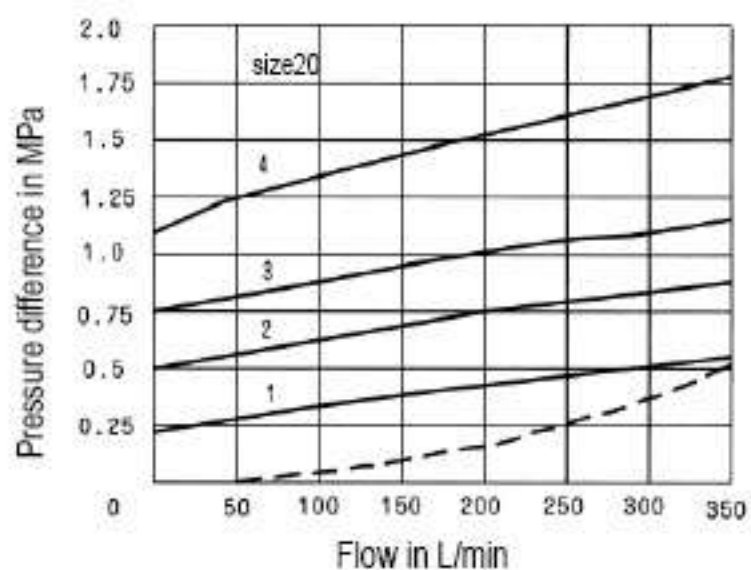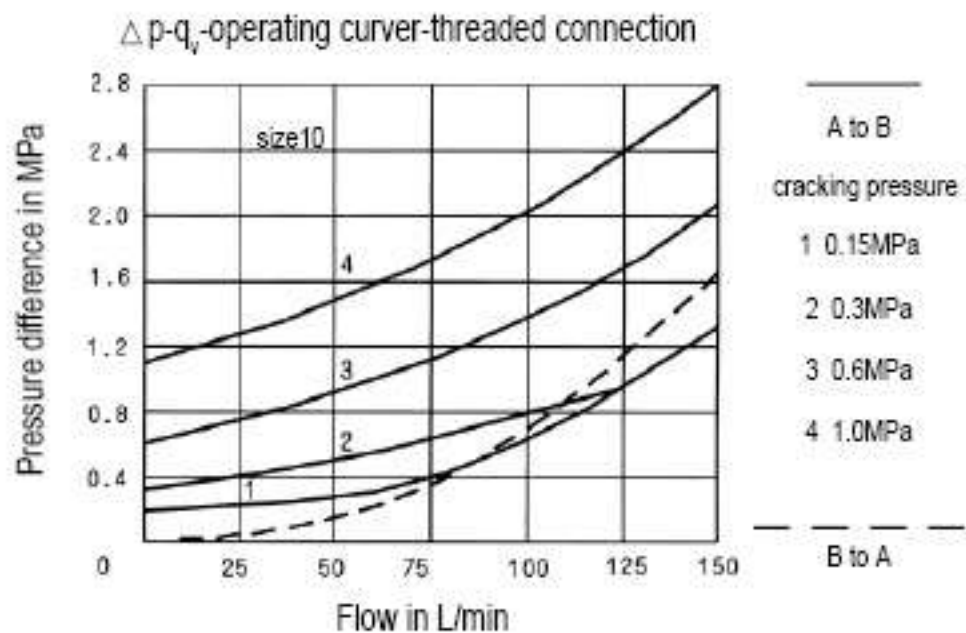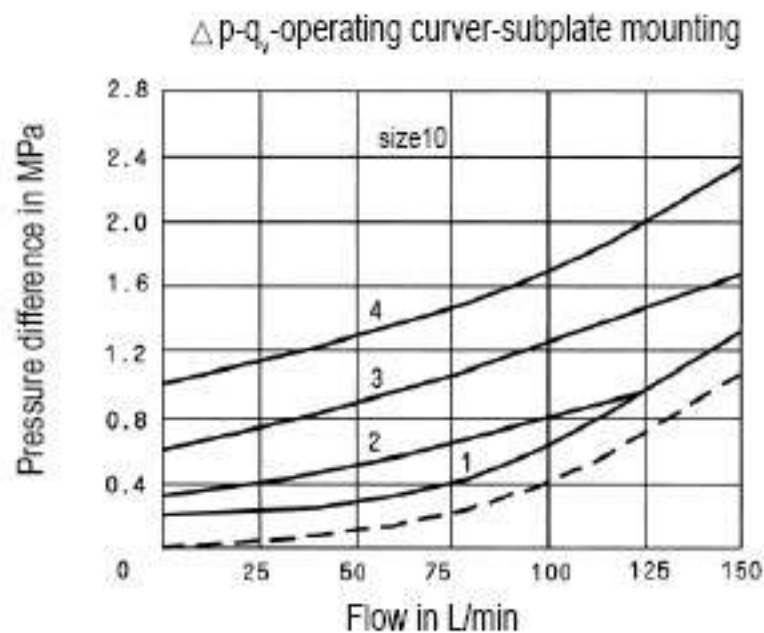


Control pressure-load pressure-operating curves

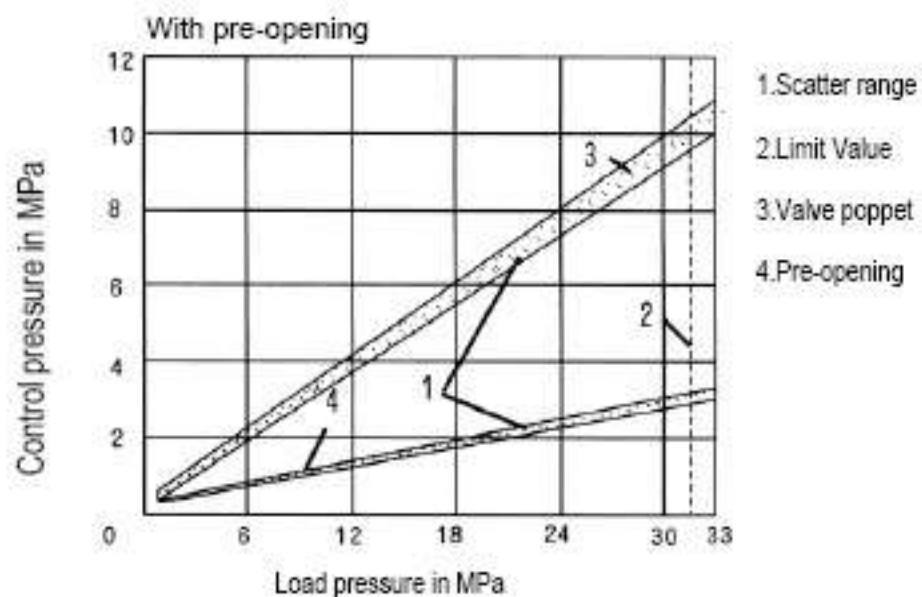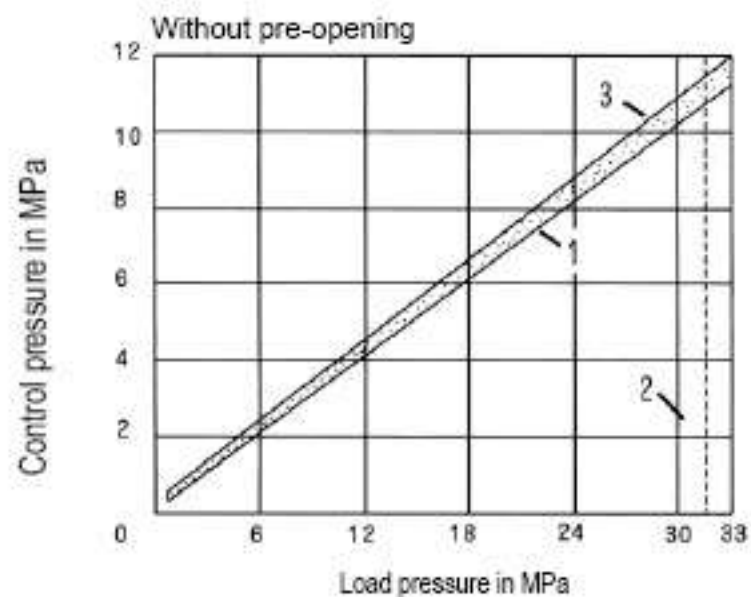

Unit dimensions: for subplate mounting

(Dimensions in mm)

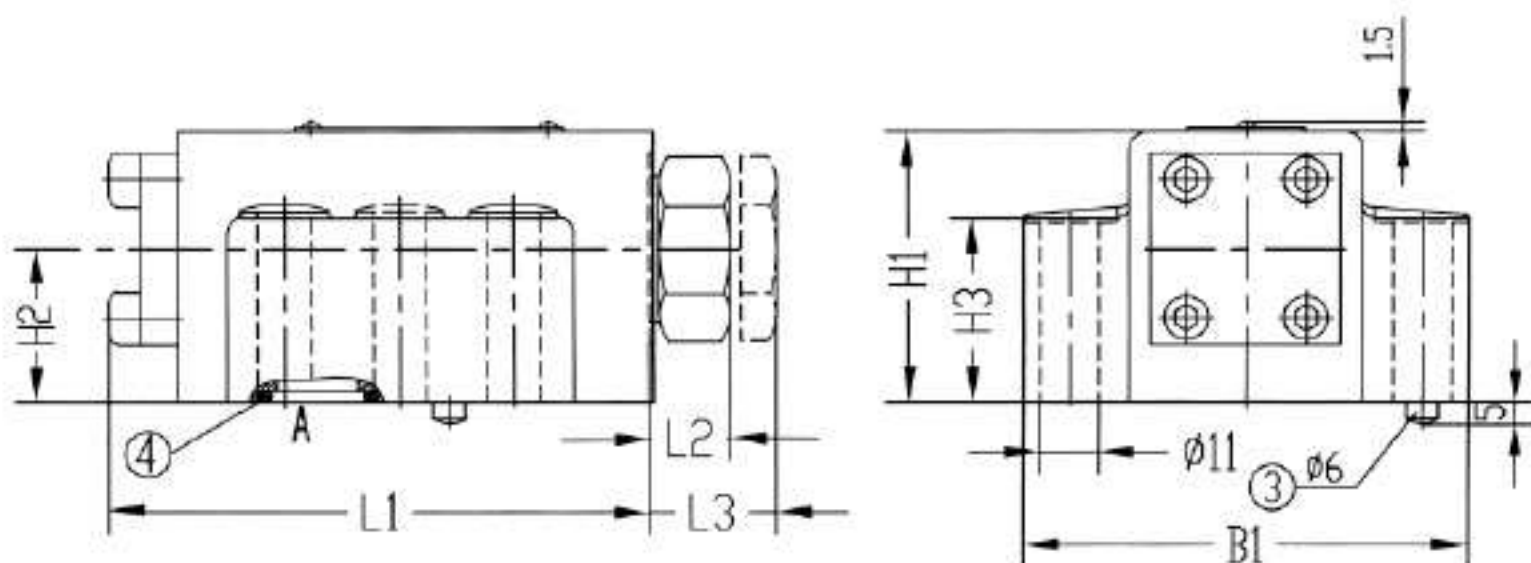

- 1 Port Y with valve type "SL"
(with valve type "SV" this port is closed)
- 2 Name plate
- 3 Fixing pin
- 4 O-ring
Size10
-ports A and B 17.12X2.62
-ports X and Y 9.25X1.78
Size20
-ports A and B 28.17X3.53
-ports X and Y 9.25X1.78
Size32
-ports A and B 34.52X3.53
-ports X and Y 9.25X1.78
- 5 Valve with opening pressure types "1" and "2" (dimension L2)
- 6 Valve with opening pressure types "3" and "4" (dimension L3)
- 7 6 valve fixing holes with type SV/SL 30 (valves fitting screws included in goods)


Valve type	Size	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
SV	10	100.8	15.5	15.5	87.8	13	42.9	18.5	7.2	35.8	-
	20	135	17.7	47.7	117	18	60.3	27.5	11.1	49.2	-
	30	156.1	36.1	46.1	134	22.1	84.2	39	16.7	67.5	-
SL	10	100.8	15.5	15.5	87.8	13	42.9	18.5	7.2	35.8	21.5
	20	135	17.7	47.7	117	18	60.3	27.5	11.1	49.2	39.5
	30	156.1	36.1	46.1	134	22.1	84.2	39	16.7	67.5	59.5


Valve type	Size	L11	L12	L13	B1	B2	B3	B4	B5	H1	H2	H3
SV	10	21.5	-	31.8	84	66.7	44	58.8	-	51	29	36
	20	20.6	-	44.5	100	79.4	61	73	-	70	37	55
	30	24.6	42.1	62.7	118	96.8	75	92.8	-	85	42.5	70
SL	10	21.5	-	31.8	84	66.7	44	58.8	7.9	51	29	36
	20	20.6	-	44.5	100	79.4	61	73	6.4	70	37	55
	30	24.6	42.1	62.7	118	96.8	75	92.8	3.8	85	42.5	70

- Size10
4 M10 × 50-10.9 (GB/T70.1-2000) M_λ=75N.m
- Size20
4 M10 × 70-10.9 (GB/T70.1-2000) M_λ=75N.m
- Size30
6 M10 × 85-10.9 (GB/T70.1-2000) M_λ=75N.m

Subplate:
must be ordered separately. see page 204
Size10 G460/01(G3/8") G461/01(G1/2")
Size20 G412/01(G3/4") G413/01(G1")
Size30 G414/01(G1 1/4") G415/01(G1 1/2")

Required surface finish of mating piece

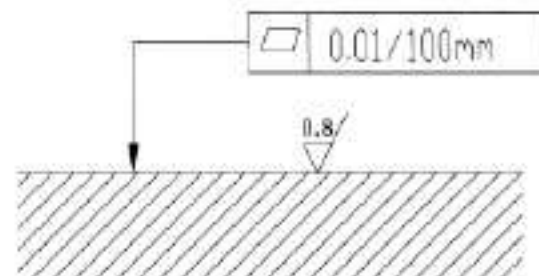

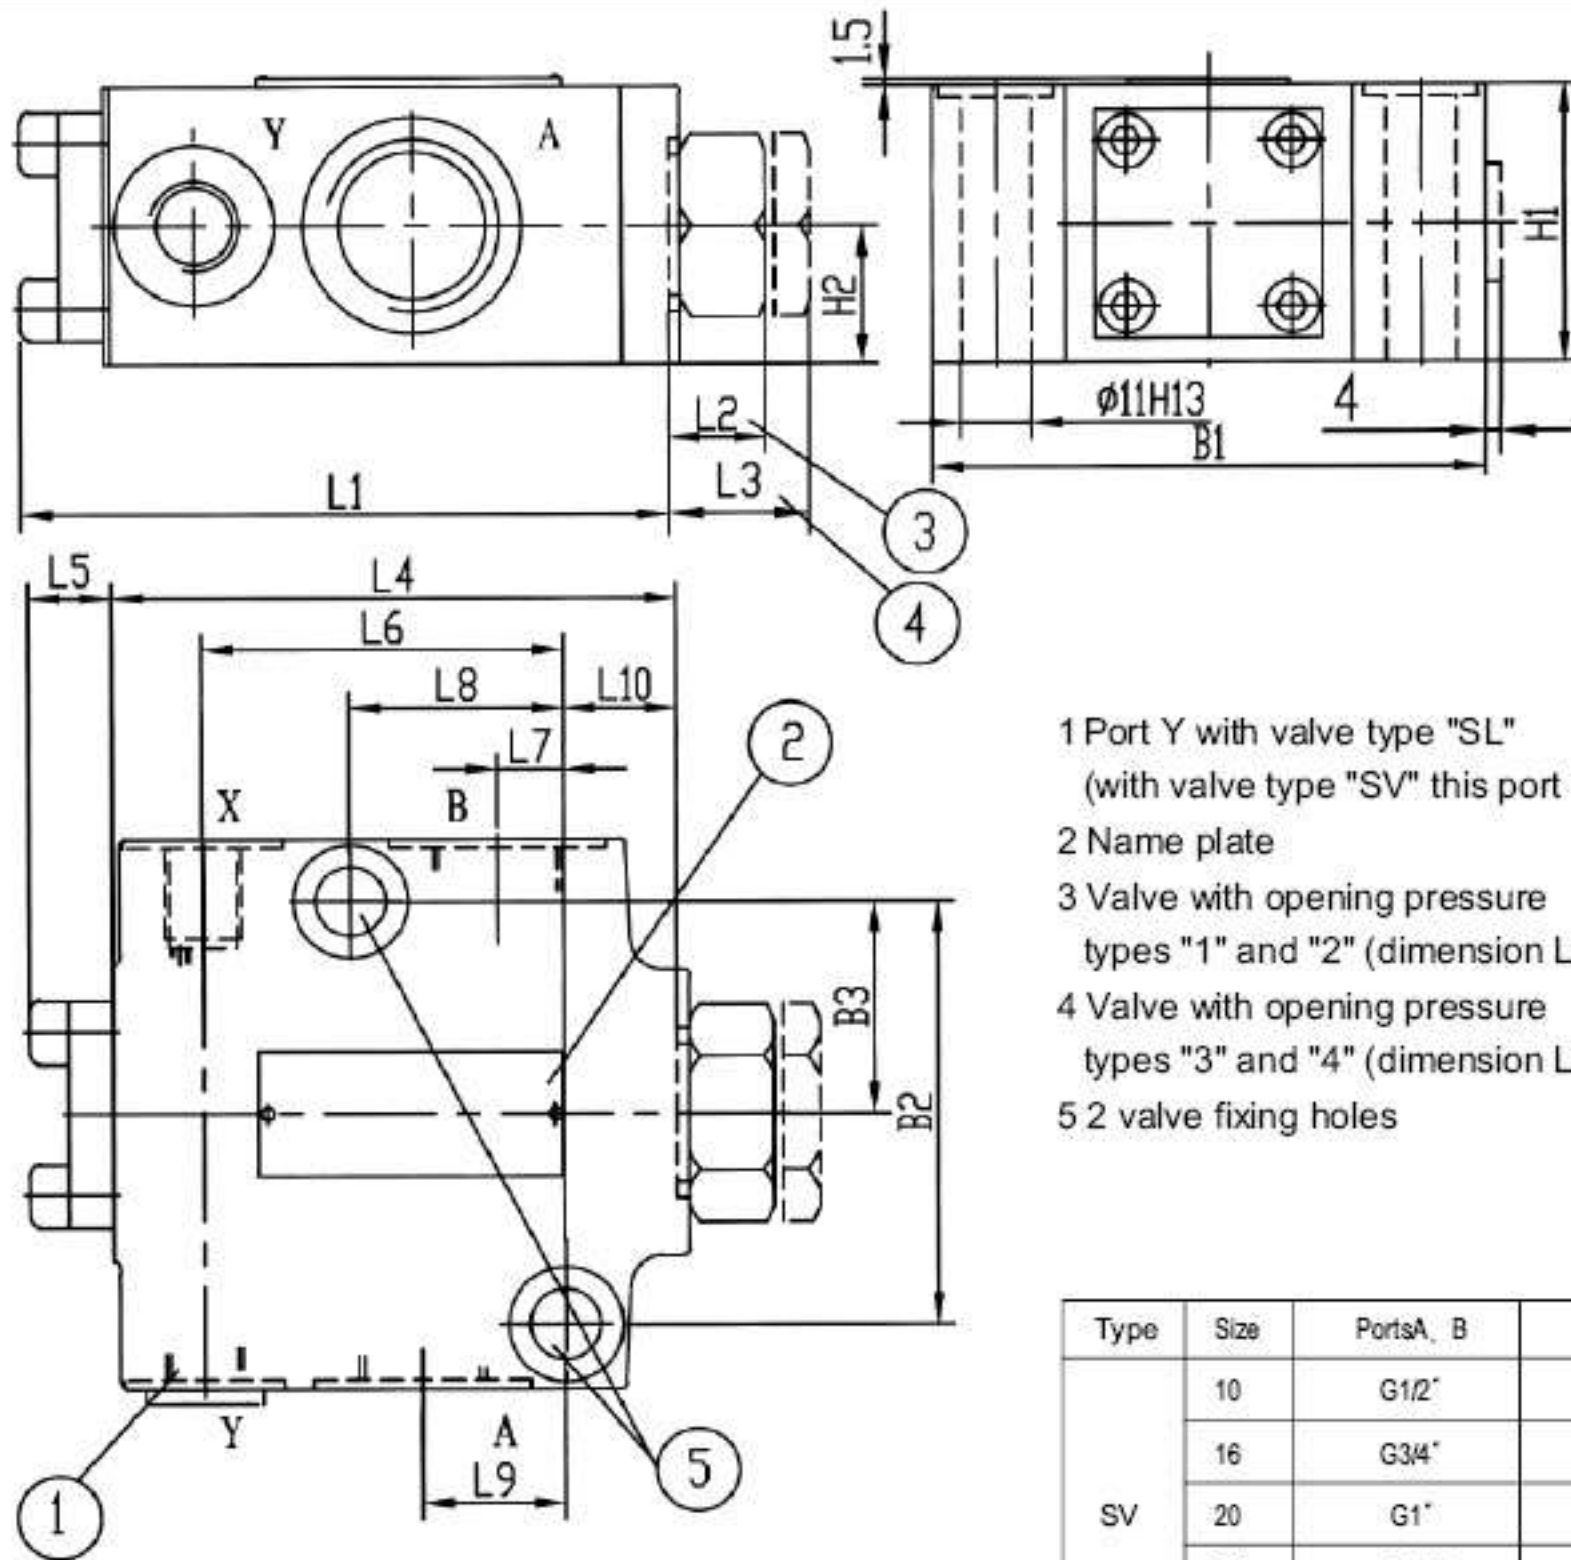

- 1 Port Y with valve type "SL"
(with valve type "SV" this port is closed)
- 2 Name plate
- 3 Valve with opening pressure types "1" and "2" (dimension L2)
- 4 Valve with opening pressure types "3" and "4" (dimension L3)
- 5 2 valve fixing holes

Type	Size	Ports A, B	Ports X, Y
SV	10	G1/2"	G1/4"
	16	G3/4"	G1/4"
	20	G1"	G1/4"
	25	G1 1/4"	G1/4"
	30	G1 1/2"	G1/4"
SL	10	G1/2"	G1/4"
	16	G3/4"	G1/4"
	20	G1"	G1/4"
	25	G1 1/4"	G1/4"
	30	G1 1/2"	G1/4"

Valve type	Size	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	B1	B2	B3	H1	H2
SV	10	100.8	15.5	15.5	87.8	13	56.5	10.5	33.5	22.5	17.3	87	66.7	33.4	44	22
	16;20	133	17.7	47.7	115	18	74.5	17	50.5	36	27	105	79.4	39.7	68	34
	25;32	156.1	35.7	45.7	134	22.1	101	24	84	49	18	130	96.8	48.4	85	42.5
SL	10	100.8	15.5	15.5	87.8	13	56.5	10.5	33.5	22.5	17.3	87	66.7	33.4	44	22
	16;20	133	17.7	47.7	115	18	74.5	17	50.5	36	27	105	79.4	39.7	68	34
	25;32	156.1	35.7	45.7	134	22.1	101	24	84	49	18	130	96.8	48.4	85	42.5

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves, manual operation, Type WMD			RE 23500/12.2004
	Size 6,10	up to 31.5 MPa	up to 120L/min	Replaces: RE 22279/05.2001

Features:

- Direct controlled directional spool valve
- subplate mounting
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Functional , section

Directional valves type WMD are manual operated directional spool valves. They control the start, stop and direction of a volume flow.



The valves consist basically of the housing (1), an operating rotary knob(2), the control spool (3), and one return springs (4). In an unoperated condition, the control spool (3) is held in the neutral or starting position by the return springs (4) - or by a detent .The control spool (3) is pushed into the required control position by means of the operating element.

Detent

Directional valves with rotary knob operation are supplied with detent as standard. it is possible to fix any control position.

Cartridge throttle


Use of the cartridge throttle is necessary when operating conditions are such, that during the switching process larger flows can occur than the performance limits of the valve allow. It is fitted in the P-line of the directional valve or in the control circuit.

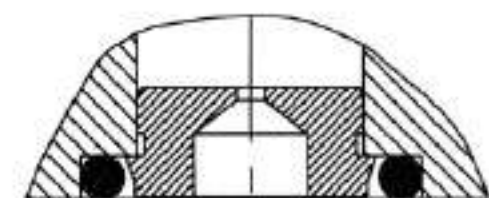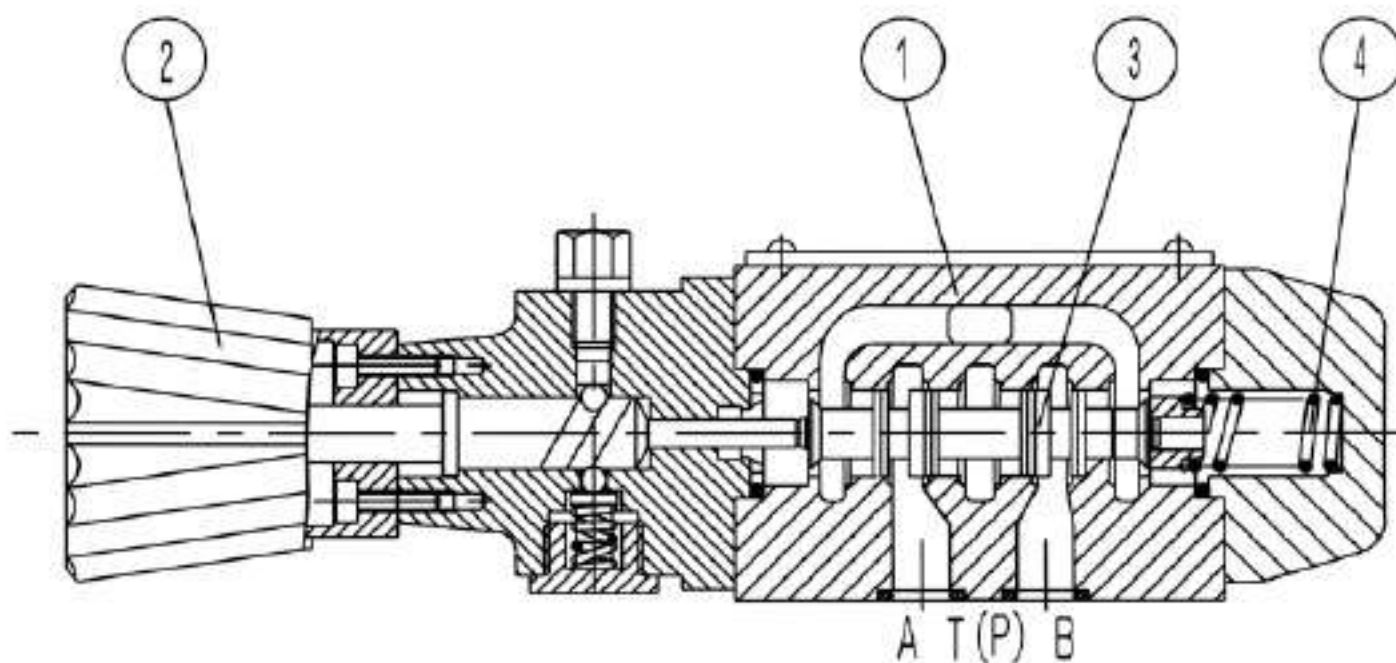

Cartridge throttle

Ordering detail

		WMD			B /	*	
3 service ports =3						Further details in clear text	
4 service ports =4						No code = Mineral oils V= Phosphate ester	
Size 6 =6						B = The technology of Beijing Huade Hydraulic	
Size 10 =10						50 = Series 50 to 59 (50 to 59 = unchanged installation and connection dimensions) (size 6) 30 = Series 30 to 39 (30 to 39 = unchanged installation and connection dimensions) (size 10)	

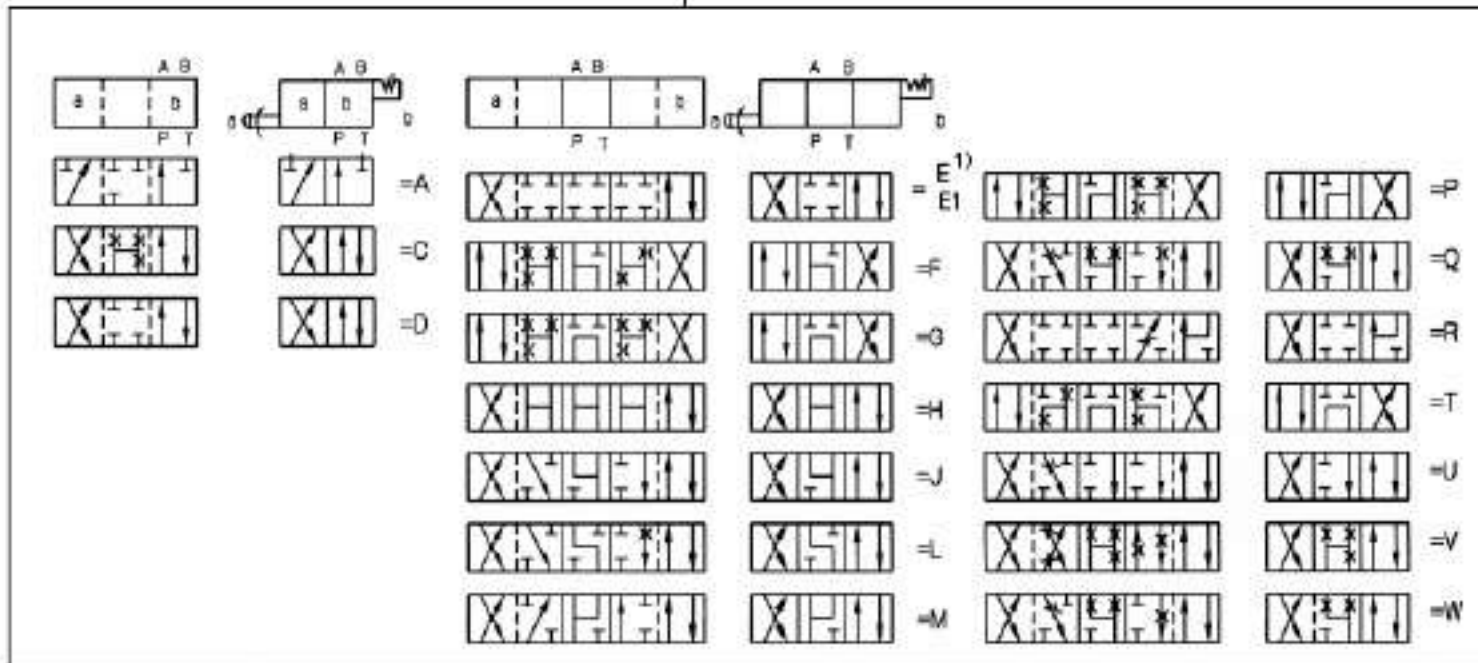

Symbol E1: P A/B pre-opening (only for size 6)

Example:

Spool type E with switched position "a", Ordering code ..EA..


Spool type E with switched position "b", Ordering code ..EB..

Technical data (For applications outside these parameters, please consult us!)

Size	6	10
Operating pressure	up to 31.5	
ports A, B, P (MPa)		
ports T (MPa)	Up to 6	Up to 16
for symbols A or B, port T must be used as a drain port if the operating pressure is higher than the permissible tank pressure.		
Flow.max (L/min)	Up to 60	Up to 120
Flow cross section (control position O)	for symbol Q, 6% of nominal cross section for symbol W, 3% of nominal cross section	
Pressure fluid	Mineral oils(for NBR seal) or phosphate ester(for FPM seal)	
Pressure fluid - temperature range (°C)	-30 to +80	
Viscosity range (mm ² /s)	2.8 to 500	
Weights (Kg)	Approx. 1.4	Approx. 3.3
Operating force (N)	Approx. 150	Approx. 250

Characteristic curves (measured at $\nu = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

Pressure difference flow curves, type WMD6

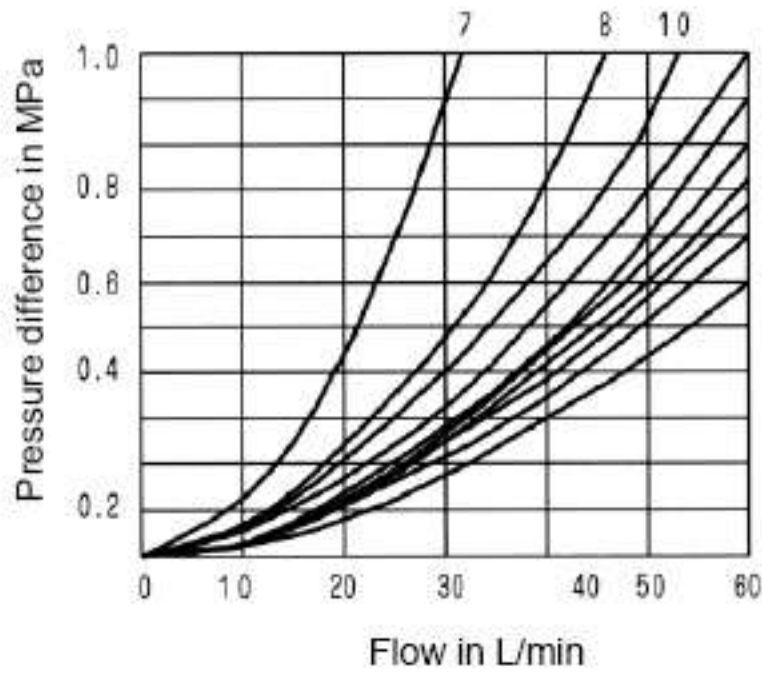


- 7.Symbol "R" in switched positions A-B
- 8.Symbol "G" and "T" in neutral position P-T

Symbol	Flow direction			
	P → A	P → B	A → T	B → T
A	3	3	-	-
C	1	1	3	1
D	5	5	3	3
E	3	3	1	1
F	1	3	1	1
G	6	6	9	9
H	2	4	2	2
J	1	1	2	1
L	3	3	4	9
M	2	4	3	3
P	3	1	1	1
Q	1	1	2	1
R	5	5	4	-
T	10	10	9	9
U	3	3	9	4
V	1	2	1	1
W	1	1	2	2

Pressure difference flow curves , type WMD10

- 4.Symbol "G" and "T" in neutral position P-T
- 7.Symbol "R" in switched positions A-B

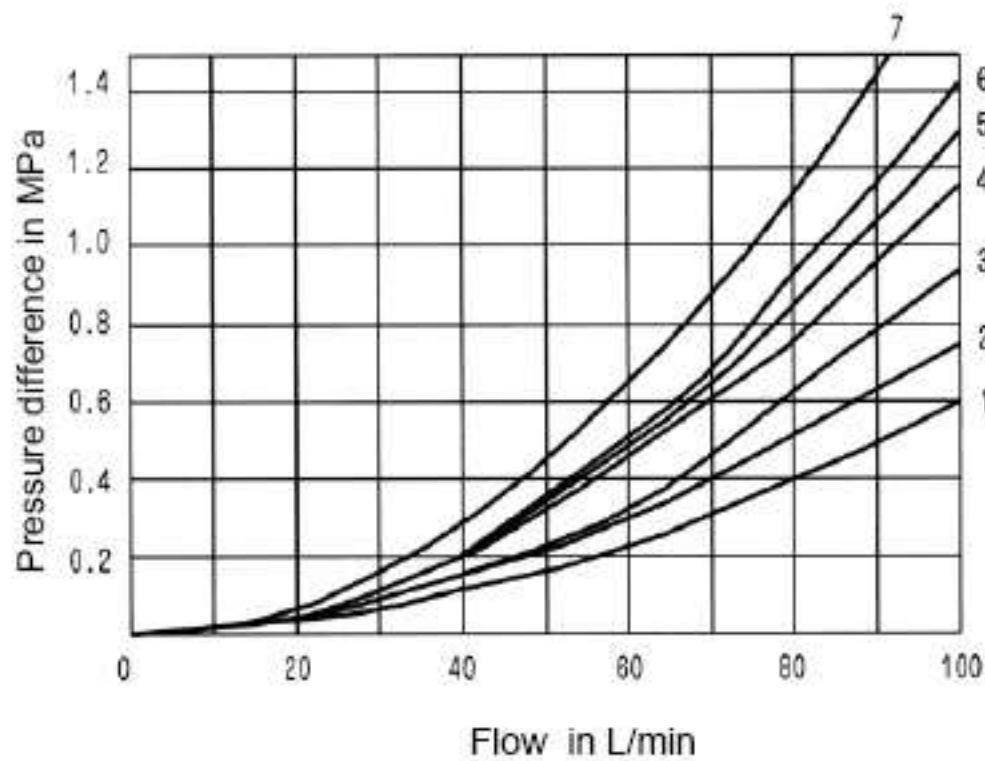

Symbol	Flow direction			
	P → A	P → B	A → T	B → T
A	2	2	-	-
C	2	2	3	3
D	2	2	3	3
E	2	2	4	4
F	2	3	3	5
G	3	3	4	6
H	1	1	4	5
J	2	2	3	3
L	2	2	3	5
M	1	1	5	5
P	3	2	5	3
Q	2	2	4	4
R	2	4	3	-
T	3	5	5	6
U	2	2	3	5
V	2	2	4	4
W	2	2	5	5



Performance limits (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

The performance limits shown apply when the valve is subject to simultaneous flow in two directions (e.g. from P to A and from B to T).
Due to the flow forces occurring within the valve, the permissible

performance limits for one path (e.g. from P to A and with B blocked) may be considerably reduced!
(Please consult us in such cases.)


Type WMD6

Curve	Symbol
1	E, E1, H, C, D, M, Q, U, W
2	J, L
3	A
4	G, P
5	F
6	V
7	R
8	T

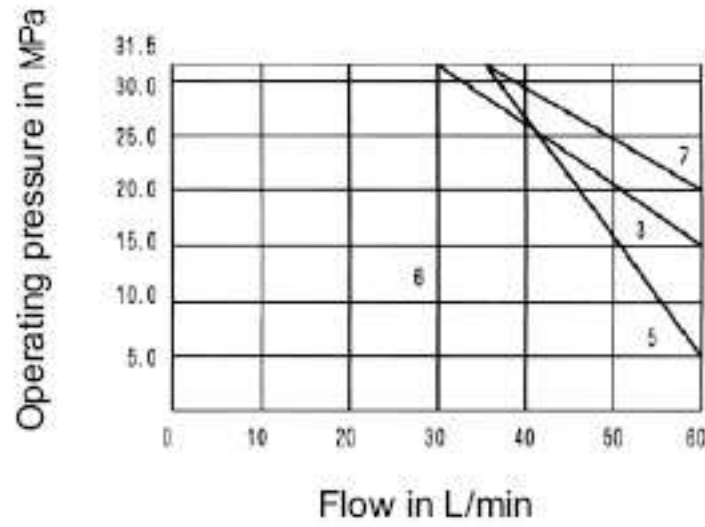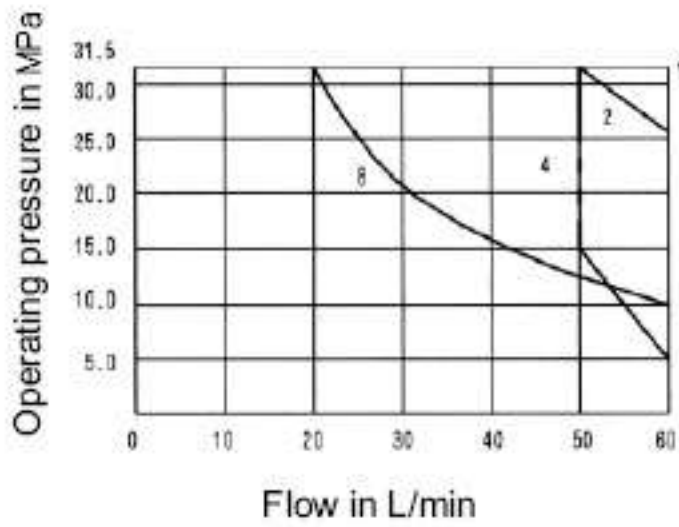

Type WMD10




Curve	Symbol
1	A
2	H
3	F, G, P, R, T
4	J, L, Q, U, W
5	C, D, E, M, V

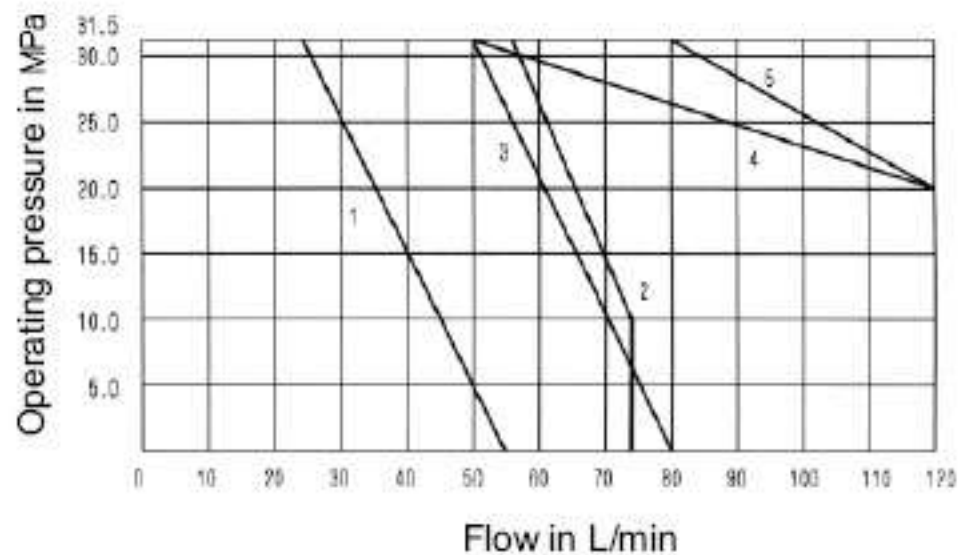


Unit dimensions

(Dimensions in mm)

Type WMD6

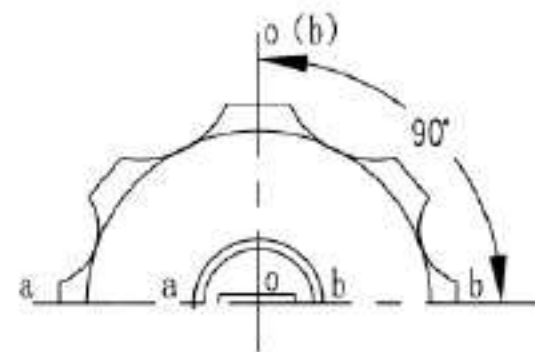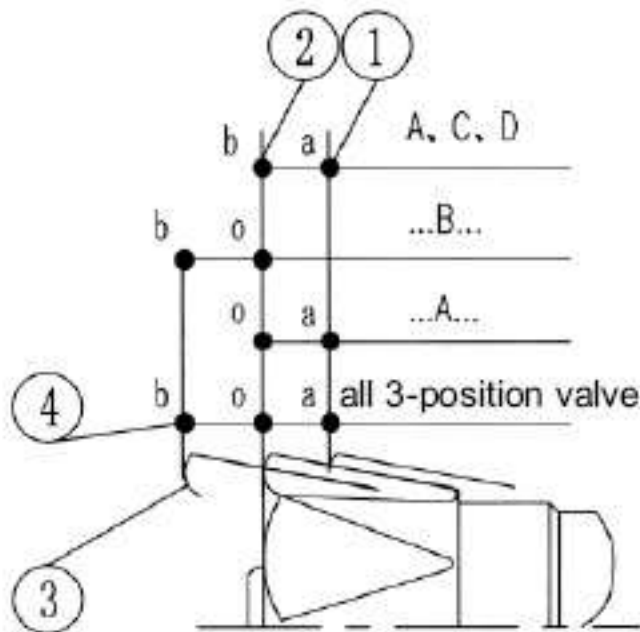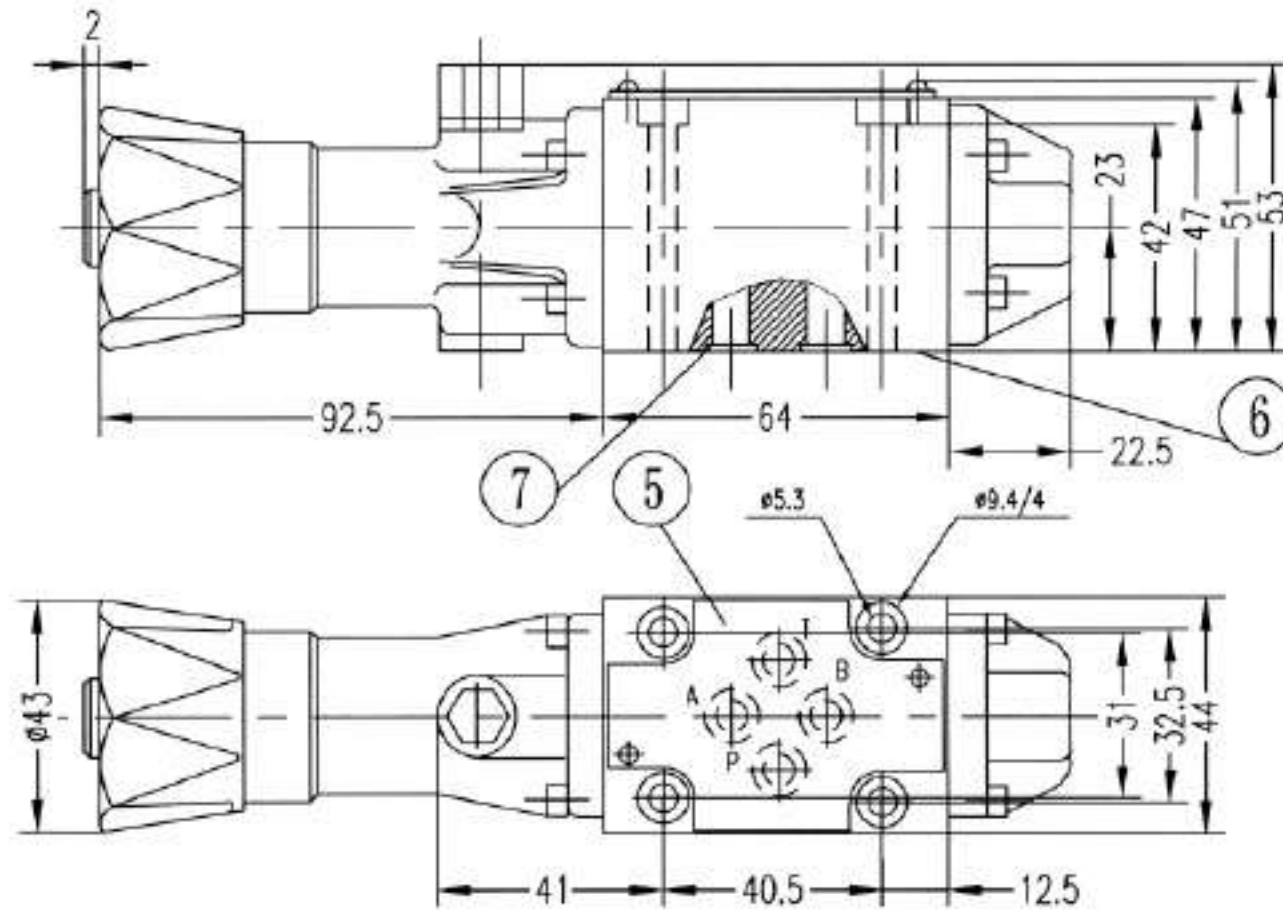

Unit dimensions for ports

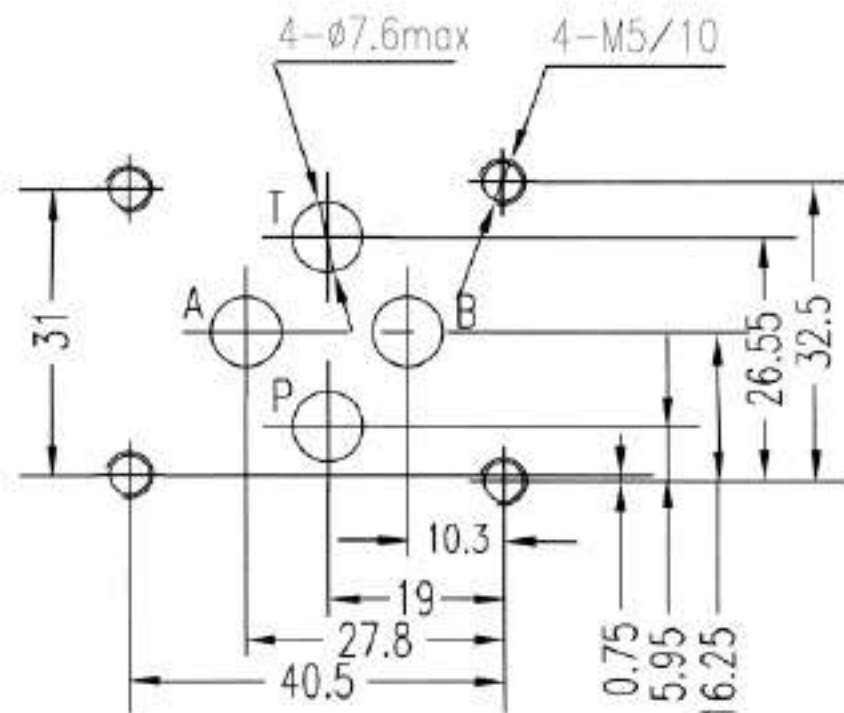

Subplates: see page 205





G341/01 (G1/4"); G341/02 (M14X1.5)

G342/01 (G3/8"); G342/02 (M18X1.5)

G502/01 (G1/2"); G502/02 (M22X1.5)

- 1. Switched position a
- 2. Switched position 0 and b
(b for 2-position valves)
- 3. Switched position b
- 4. Operating valve 90° clockwise and
90° anti-clockwise 3-position valve
- 5. Nameplate
- 6. Valve connecting surface
- 7. O-ring 9.25X1.78 (for ports A, B, P, and T)

Type WMD10

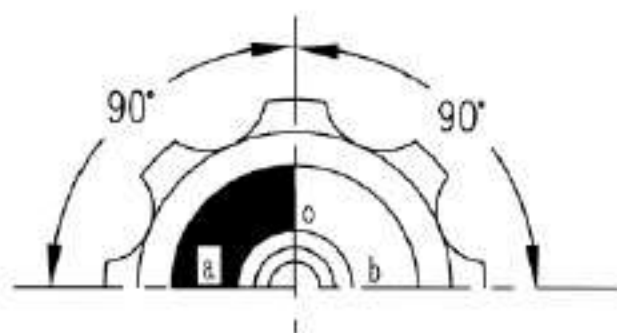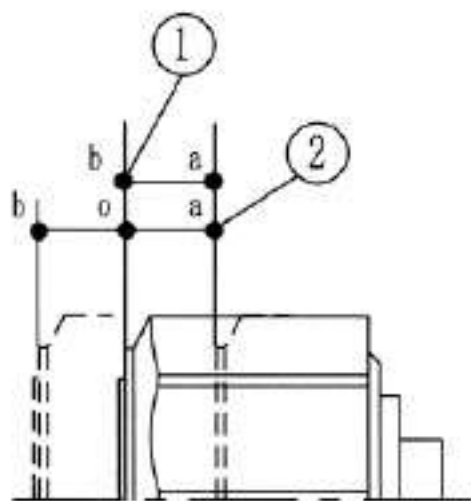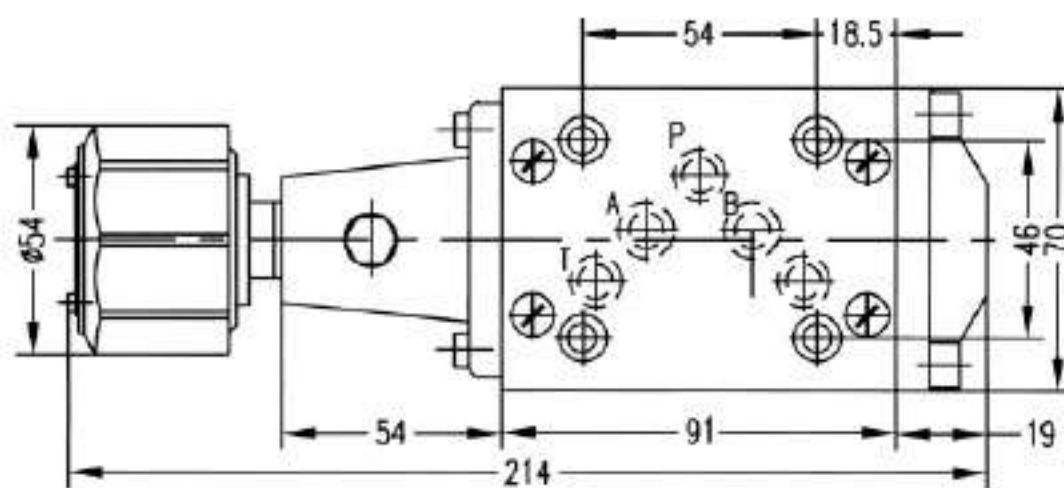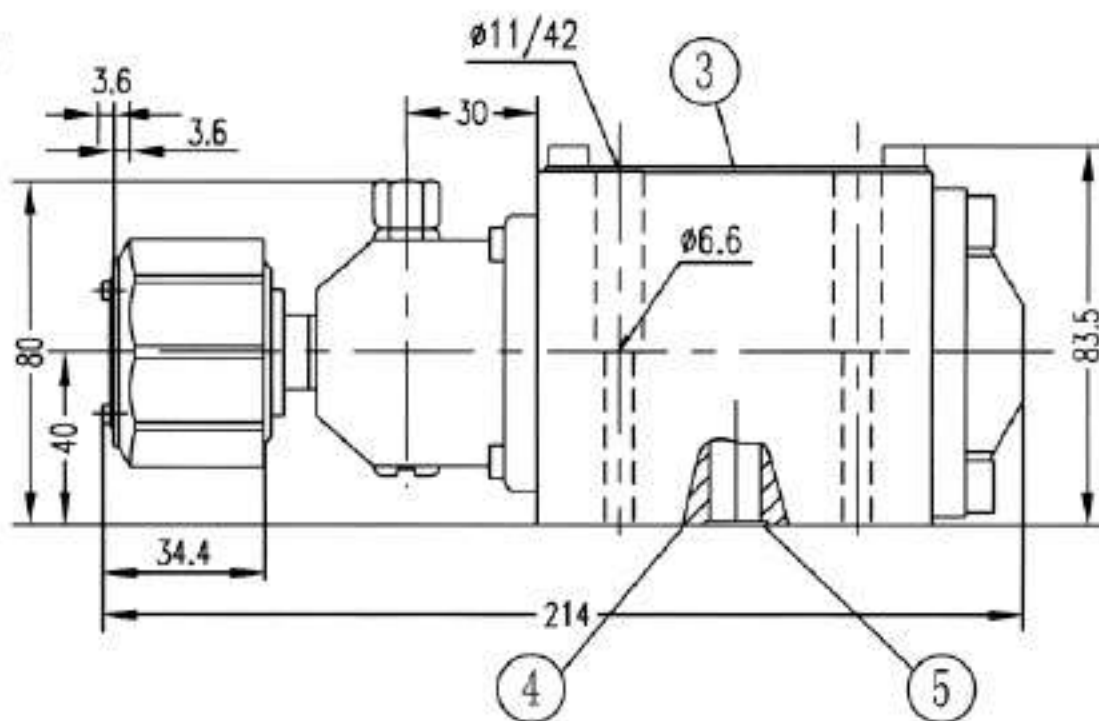

Unit dimensions for ports


Sub-plates: see page 206

G66/01 (G3/8"); G66/02 (M18X1.5)

G67/01 (G1/2"); G67/02 (M22X1.5)

G534/01 (G3/4"); G534/02 (M27X2)

- 1, 2-position valves: A, C, D, ...EA...
- 2, 3-position
- 3, Nameplate
- 5, Connecting surface
- 6, O-ring 9.25X1.78
(for ports A, B, P, and T)

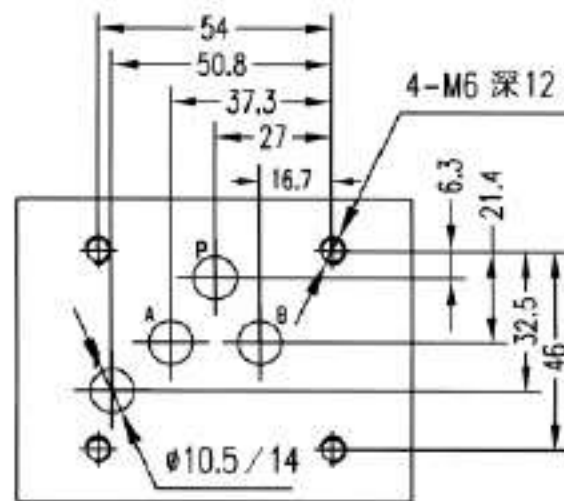

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	4/3 and 4/2 directional control valves with hand lever, Type WMM			RE 22277/12.2004
	Size 6, 10, 16, 25	up to 35MPa	up to 450L/min	Replaces: RE 22275/05.2001

Features:

- Direct actuated directional spool valve with hand lever
- With spring return or detent, optional
- For subplate mounting
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H




Function, section

The type WMM valves are hand lever actuated directional spool valves. They control the start, stop and direction of a flow.

The directional valves basically comprise of a housing (1), hand lever (2), control spool (3), as well as one or two return springs (4). In the unoperated condition the control spool (3) is held in the neutral or its initial position by the return springs (4). The control spool (3) is actuated via the hand lever (2), this acts via a joint and the pin (5) directly onto the control spool (3). The spool is thereby moved out of its rest position into its required switched position. After the hand lever (2) has been returned to the switched position zero, the spool (3) is returned to the neutral position via the return springs (4).




Type H-4WMM../F.. (with detent)

These valves are either 2 or 3 position directional control valves which are fitted with a detent (6), which operates in all of the switched positions.

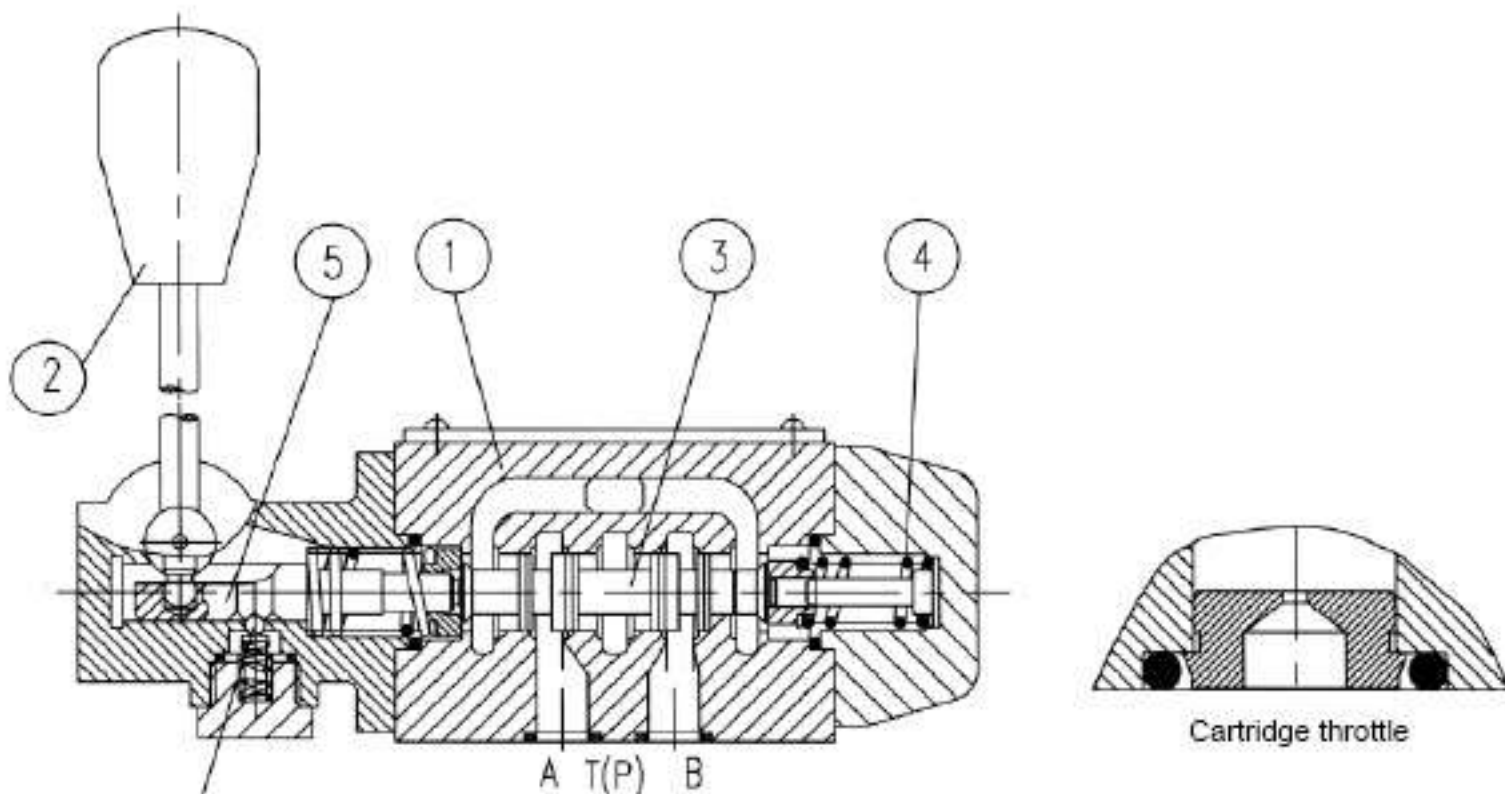

Type 4WMM6

Ordering details

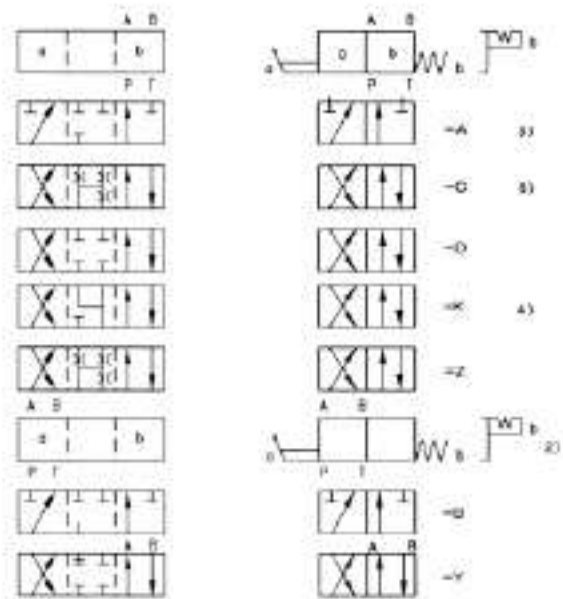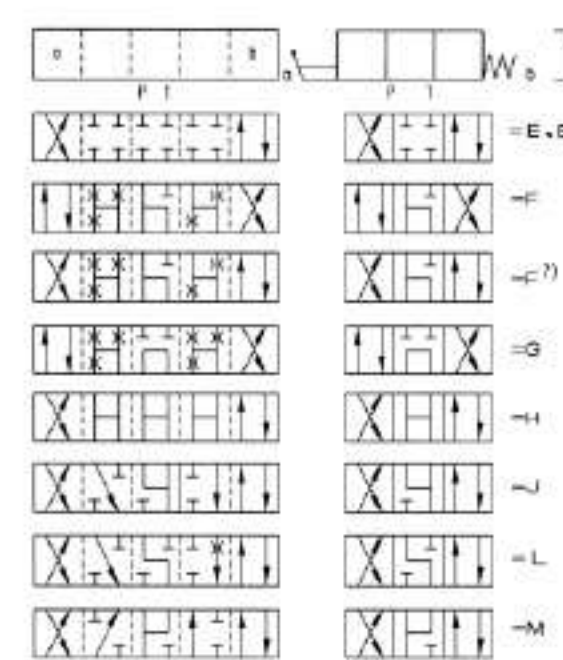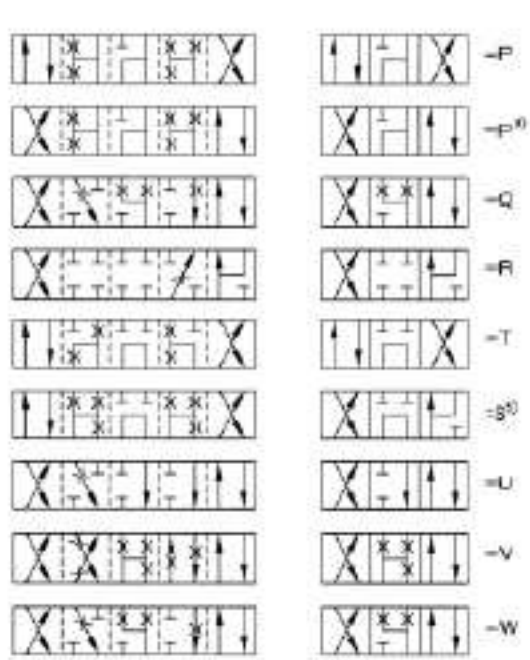H-		WM		B /			*
35MPa (Only Size 16, 25)						Further details in clear text	
3 service ports = 3 4 service ports = 4						No code = Mineral oils V = phosphate ester	
Size 6 = 6 Size 10 = 10 Size 16 = 16 Size 25 = 25						Only for Size 6 and 10 No code = Without throttle insert B08 = Throttle ϕ 0.8 mm B10 = Throttle ϕ 1.0 mm B12 = Throttle ϕ 1.2 mm Note: Size 16, 25 without throttle	
						No code = with spring return, without detent F = without spring return, with detent	
				B = Technology of Beijing Huade Hydraulic			
				50 = Series 50 (50 to 59: unchanged installation and connection dimensions) (For Size 6, 16, 25)			
				10 = Series 10 (10 to 19: unchanged installation and connection dimensions) (For Size 10)			
							

Example: Spool E on side "a".

Order example: ...EA...

Spool E on side "b".

Order example: ...EB...

- 1) Spool E1: P, A/B, preview port (only for Size 6).
- 2) For Size 10, Spool B, Y, hand lever on side B.
- 3) Spool A and B only for Size 6 and 10.
- 4) Spool K and Z only for Size 16 and 25.

5) Spool S only for Size 16.

6) For Size 16 and 25, spool C is the same as spool H.

For Size 16 and 25, spool D is the same as spool E.

7) Only for Size 16 and 25.


8) Only for Size 16 and 25.

Technical data (For applications outside these parameters, please consult us!)

Size	6	10	16	25
Maximum port A, B, P (MPa)	to31.5		to35	
Working pressure port T (MPa)	to16	to15	to25	to25
Maximum fluid (L/min)	to60	to100	to300	to450
Flow cross section (control position 0)	for symbol Q, 6% of nominal cross section for symbol W, 3% of nominal cross section		for symbol Q, V, 16% of nominal cross section for symbol W, 3% of nominal cross section	
Pressure fluid	Mineral oil or Phosphate ester			
Fluid temperature range (°C)	-30 ~ + 80			
Viscosity range (mm ² /s)	2.8 ~ + 500			
Weight (Kg)	approx.1.4	approx3.3	approx8	approx17
Control power of push lever (N)	Without return pressure approx20 Without return pressure approx30	with detent approx.16~23 without detent approx. 20~27	approx75	approx120

Characteristic curves (measured at $\nu = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

Characteristic curves:

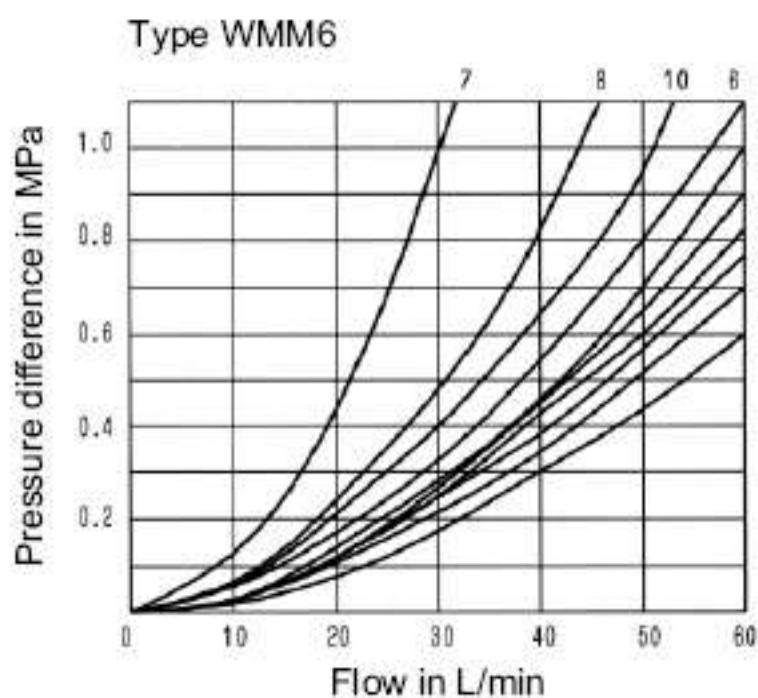


Spool	Shifted position			
	P → A	P → B	A → T	B → T
A	3	3	-	-
B	3	3	-	-
C	1	1	3	1
D	5	5	3	3
E	3	3	1	1
F	1	3	1	1
G	6	6	9	9
H	2	4	2	2
J	1	1	2	1
L	3	3	4	9
M	2	4	3	3
P	3	1	1	1
Q	1	1	2	1
R	5	5	4	1
T	10	10	9	9
U	3	3	9	4
V	1	2	1	1
W	1	1	2	2
Y	5	5	3	3

7 Spool "R" at controller position A to B
8 Spool "G" and "T" at middle position P to T

Characteristic curves: Type WMM10


4 Spool "G" and "T" at middle position P to T
 7 Spool "R" at switch position A to B

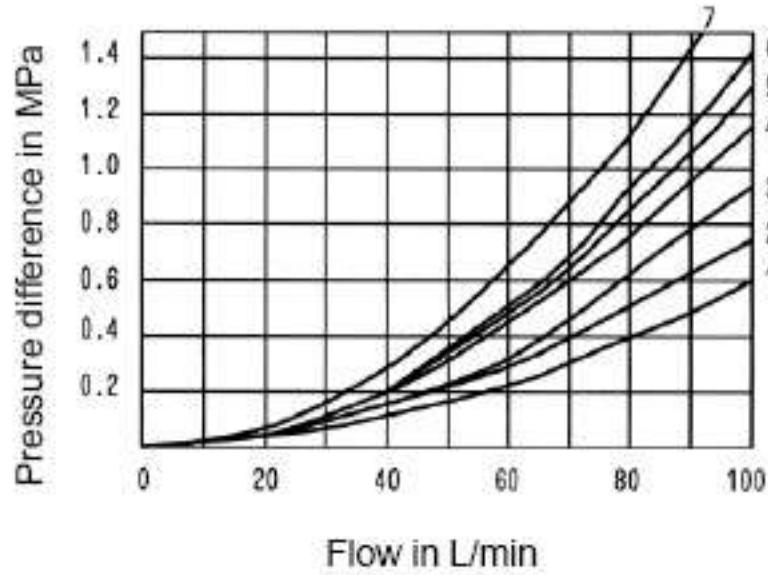

Spool	Shifted position			
	P → A	P → B	A → T	B → T
A	2	2	-	-
B	2	2	-	-
C	2	2	3	3
D	2	2	3	3
E	2	2	4	4
F	2	3	3	5
G	3	3	4	6
H	1	1	4	5
J	2	2	3	3
L	2	2	3	5
M	1	1	5	5
P	3	2	5	3
Q	2	2	4	4
R	2	4	3	-
T	3	5	5	6
U	2	2	3	5
V	2	2	5	5
W	2	2	5	5
Y	2	2	5	3

Characteristic curves: Type WMM16


4 Spool "G" and "T" at middle position P to T
 7 Spool "S" at middle position P to T

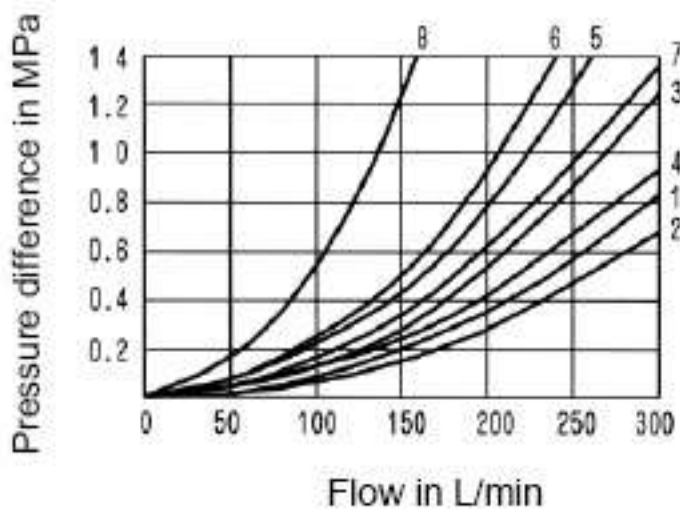

Spool	Shifted position			
	P → A	P → B	A → T	B → T
E, D, Y	1	1	1	3
F	2	2	3	3
G, T	5	1	3	7
H, C, Q	2	2	3	3
V, Z	2	2	3	3
J, K, L	1	1	3	3
M, W	2	2	4	-
R	2	2	4	-
U	1	1	4	7
S	4	4	4	-

Characteristic curves: Type WMM25

4 Spool "L" at A to T
6 Spool "U" at B to T

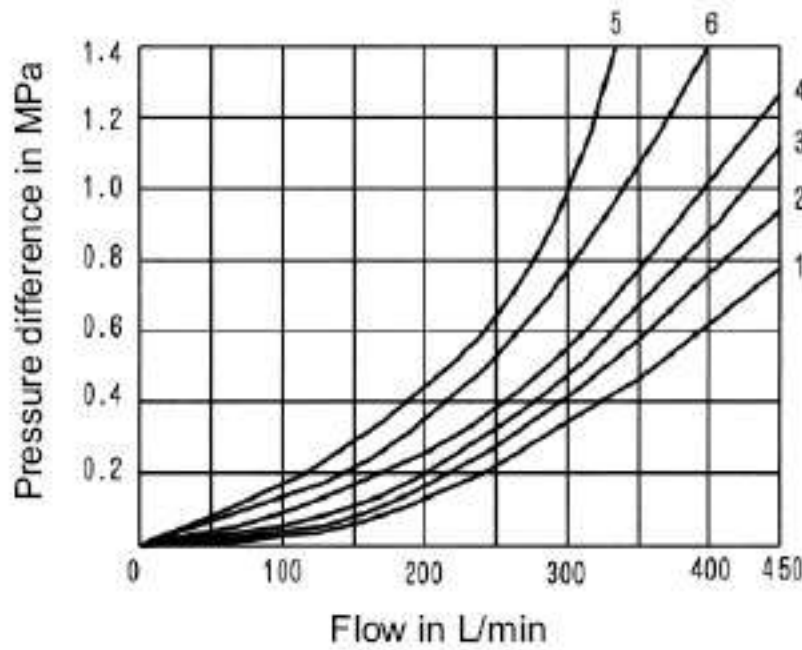



Spool	Shifted position			
	P → A	P → B	A → T	B → T
E	2	2	1	4
F	1	2	1	2
G	2	2	2	4
H	2	2	1	3
J	2	2	1	3
L	2	2	1	2
M	2	2	1	4
P	2	2	1	4
Q	2	2	1	4
R	1	2	1	-
T	2	2	2	4
U	2	2	1	4
V	2	2	1	4
W	2	2	1	3

Performance limits:


The switching function of the valve is, due to the sticking effect, dependent on the filtration. The flow forces acting within the valve also affects the flow performance limits.

For 4-way valves the stated flow data is valid for the normal application case of 2 directions of flow (e.g. from P to A and at the same time return flow from B to T) (see table). If there is only one direction of flow then the permissible flow can be considerably lower, (e.g. when using a 4-way directional valve as a 3-way directional valve with ports A or B plugged).

Performance limits of WMM6:

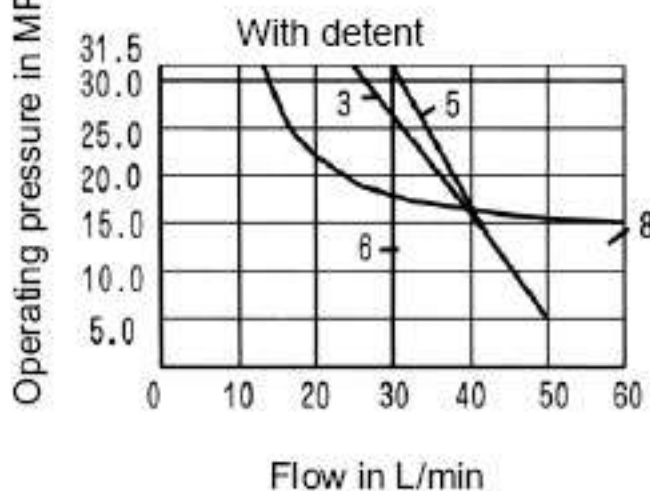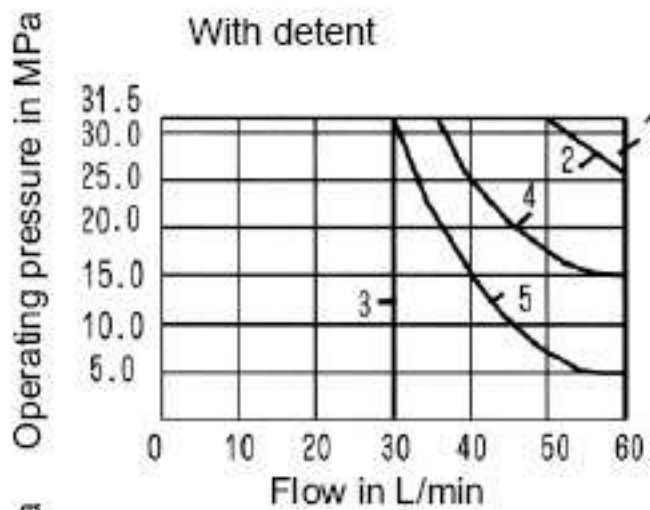


Characteristic curves	Spool	Characteristic curves	Spool
without detent	E, E1, H, C, D, M, Q, U, W, G, J, L, R, Y, A, B, V, F, P, T	with detent	E1, M, H, C, D, Y, E, J, Q, L, U, W, A, B, G, T, F, V, P, R, T
1		1	
2		2	
3		3	
4		4	
5		5	
		6	
		7	
		8	
		9	

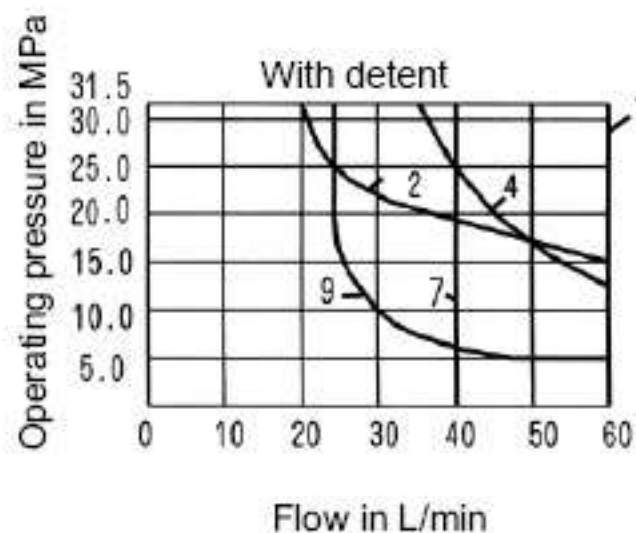

Characteristic curves: Type WMM10

Characteristic curves:	Spool
1	A, B
2	H
3	F, G, P, R, T
4	J, L, Q, U, W
5	C, D, E, M, V, Y

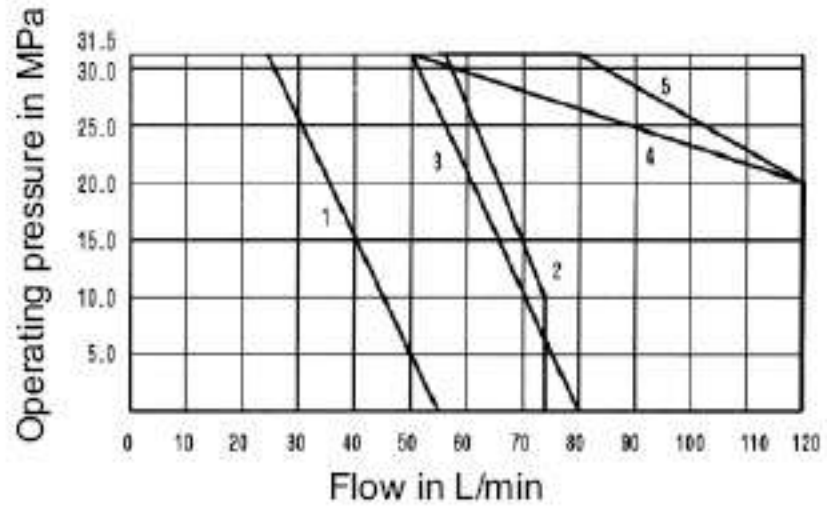

Characteristic curves: Type WMM16


2-position valves , without detent					
flow q_v in L/min	Operating pressure max(MPa)				
Spool	7	14	21	28	35
C	300	300	300	260	220
D	300	300	210	190	160
K	300	300	200	150	130
Z	300	240	190	170	150
3-position valves without detent					
flow q_v in L/min	Operating pressure max(MPa)				
Spool	7	14	21	28	35
E, H, J, L, M Q, R, U, W	300	300	300	300	300
F, P	300	300	210	190	170
G, S, T	300	300	220	210	180
V	300	260	200	180	170

Characteristic curves: Type WMM25

2-position valves , with detent					
flow q_v in L/min	Operating pressure max(MPa)				
Spool	7	14	21	28	35
C, D, K, Z	300	300	300	300	300
3-position valves with detent					
flow q_v in L/min	Operating pressure max(MPa)				
Spool	7	14	21	28	35
E, H, J, L, M Q, R, U, W	300	300	300	300	300
F, P	300	300	280	230	230
G, T, S	300	300	230	230	230
V	300	300	250	230	230

2-position valves without detent					
flow q_v in L/min	Operating pressure max(MPa)				
Spool	7	14	21	28	35
C	450	300	250	200	180
D	350	300	275	250	200
K	200	150	140	130	120
Z	300	270	240	220	200
3-position valves without detent					
flow q_v in L/min	Operating pressure max(MPa)				
Spool	7	14	21	28	35
E, J, L, M Q, R, U, W	450	450	450	450	450
F	450	250	200	135	110
G, T	450	330	290	230	180
H	450	450	400	400	350
P	450	310	240	215	150
V	450	310	280	270	200

2-position valves with detent					
flow q_v in L/min	Operating pressure max(MPa)				
Spool	7	14	21	28	35
C, D, K, Z	450	450	450	450	450
3-position valves with detent					
flow q_v in L/min	Operating pressure max(MPa)				
Spool	7	14	21	28	35
E, F, G, H, J L, M, P, R, T U, W	450	450	450	450	450
V	450	450	400	350	300

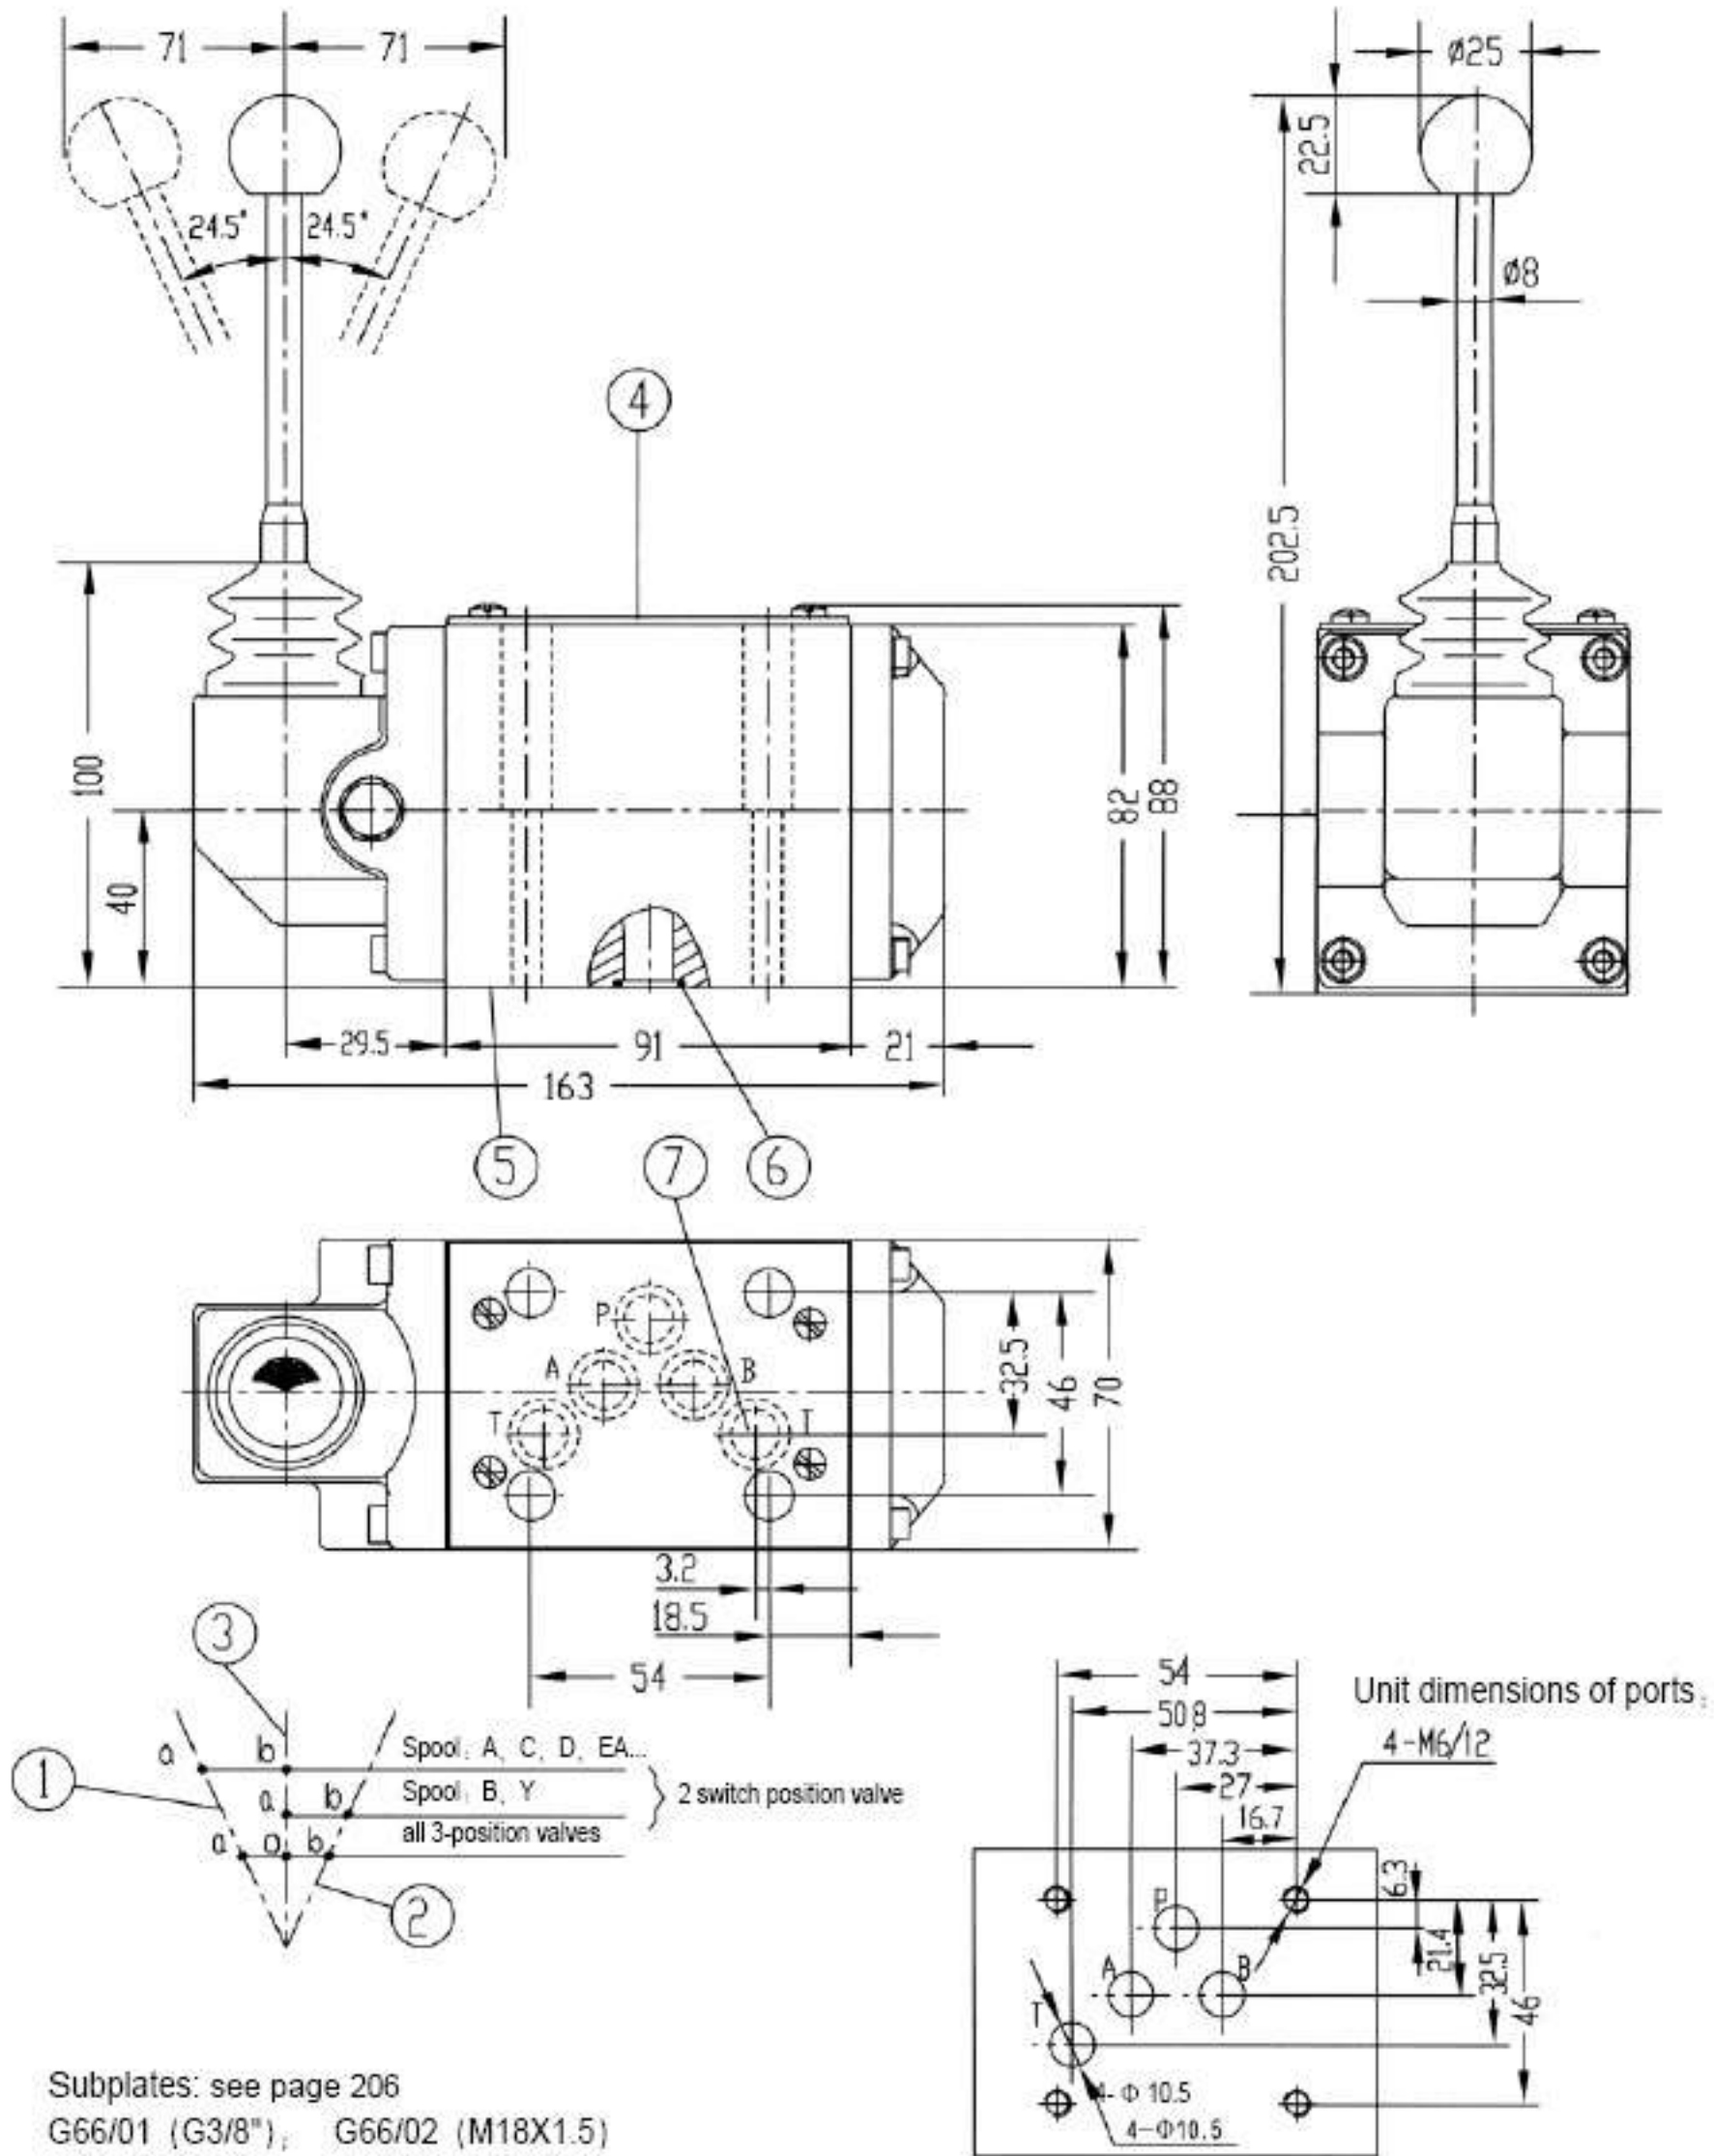

Subplates: see page 206

G66/01 (G3/8"); G66/02 (M18X1.5)

G67/01 (G1/2"); G67/02 (M22X1.5)

G534/01 (G3/4"); G534/02 (M27X2)

1 Switched position a

2 Switched position b

3 Switched position 0, a, b


(a and b on 2-position valve)

4 Nameplate


5 Connection surface

6 O-ring 12 x 2(for ports A, B, P and T)




7 When using control piece, may regarded as assistant return port

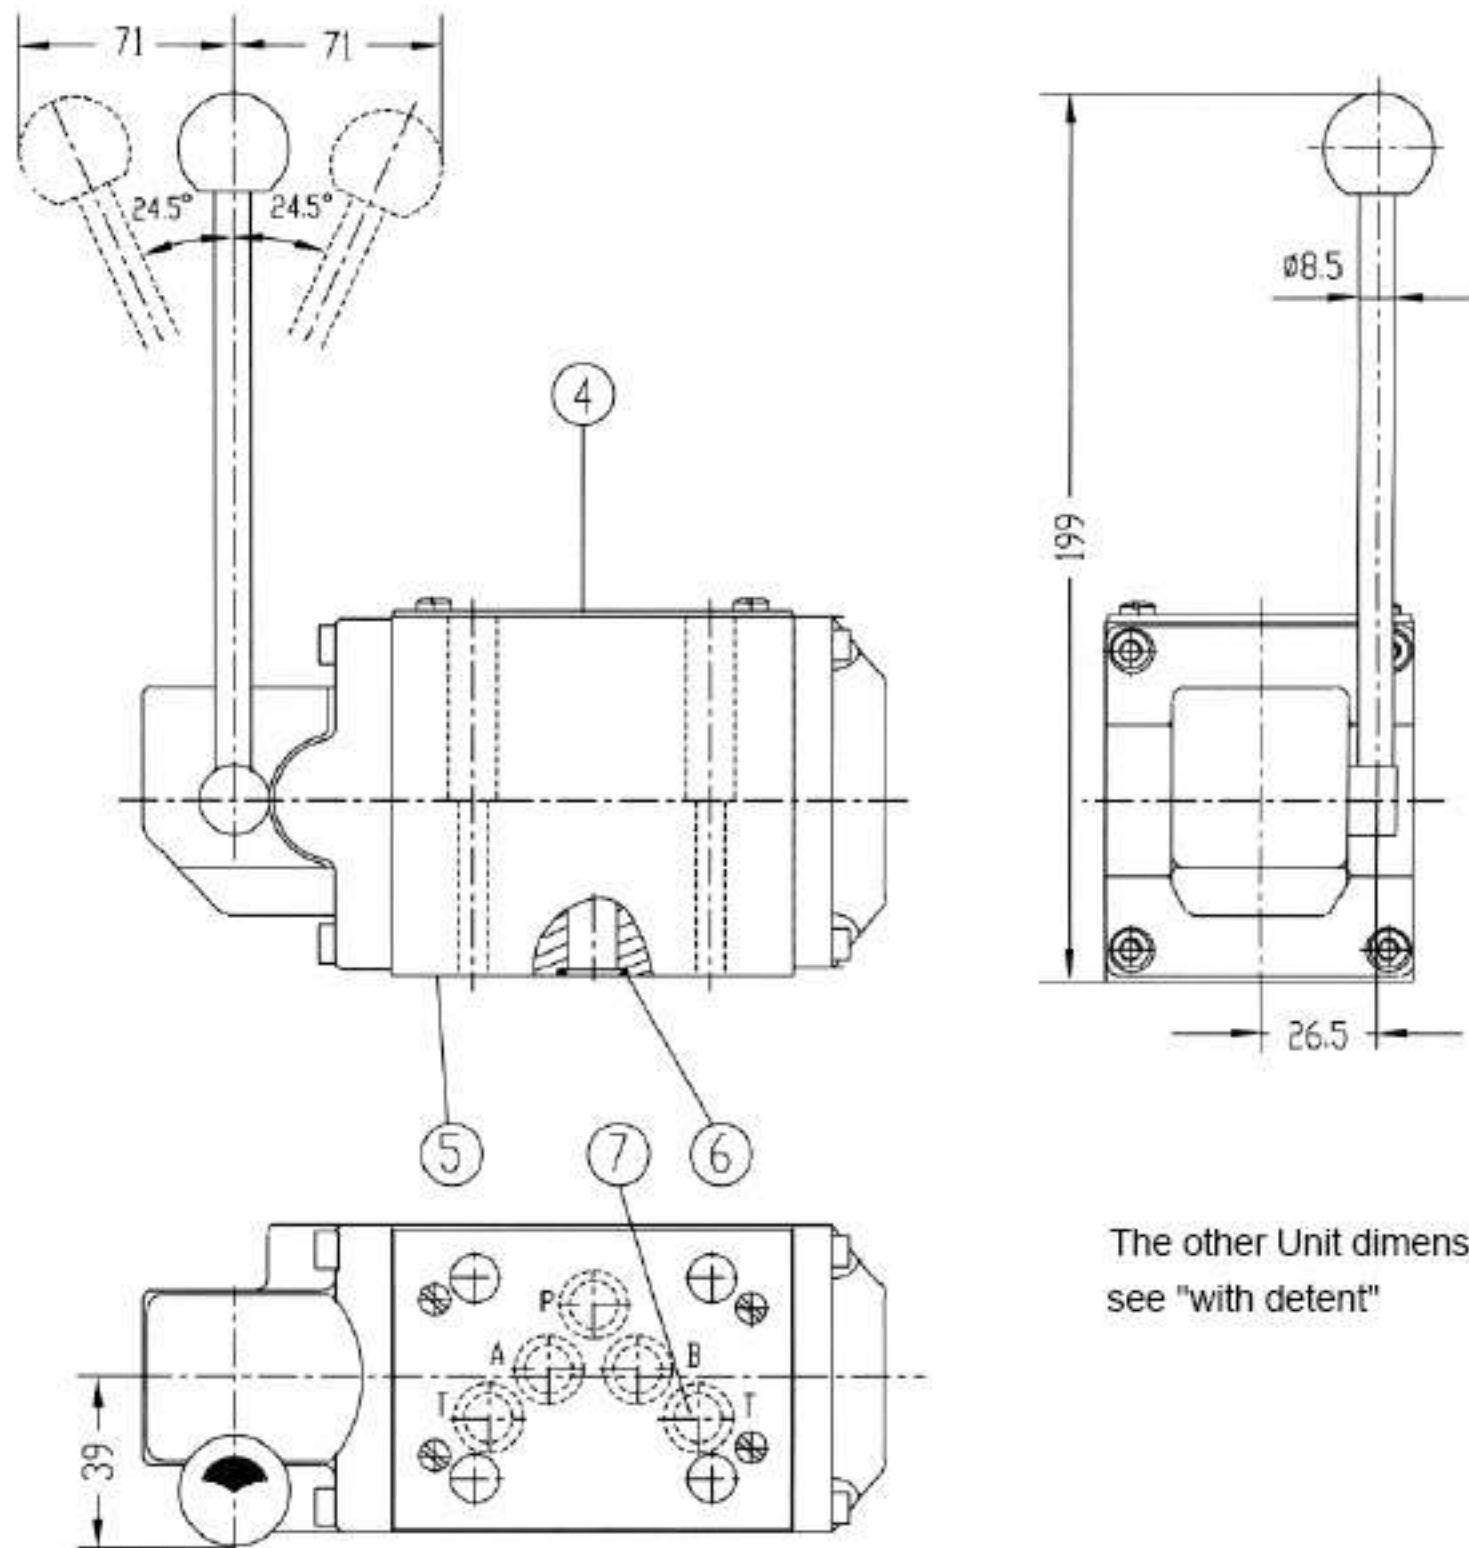



The other Unit dimensions see "with detent"

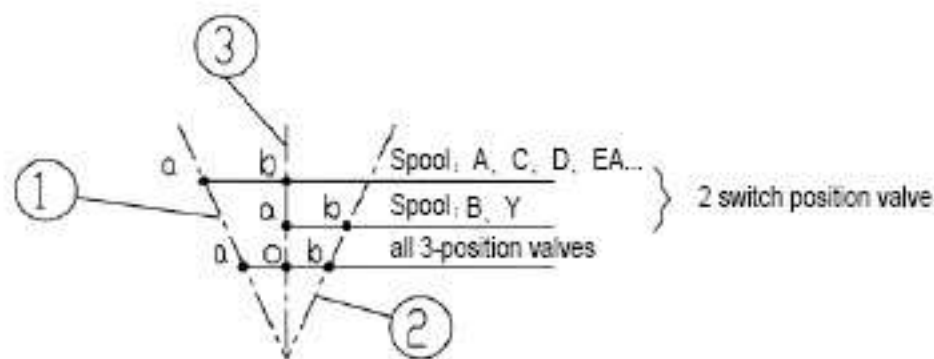

- 1 Switched position a
- 2 Switched position b
- 3 Switched position 0, a, b
(a and b on 2-position valve)
- 4 Nameplate
- 5 Connection surface
- 6 O-ring 12 x 2(for ports A, B, P and T)
- 7 When using control piece,may regarded as assistant return port

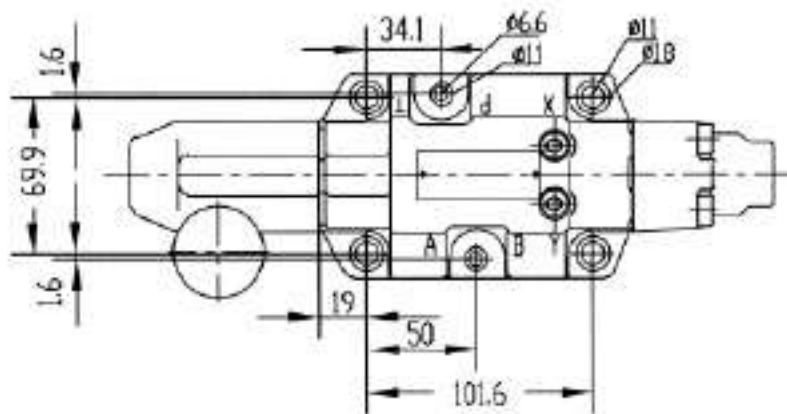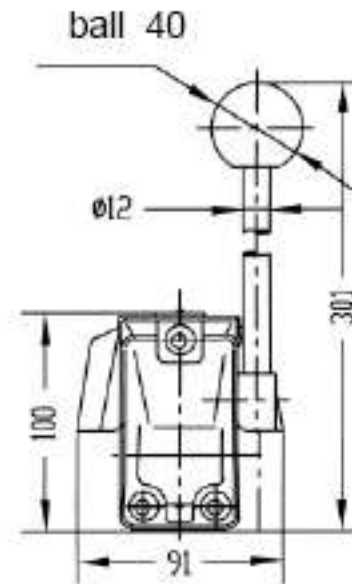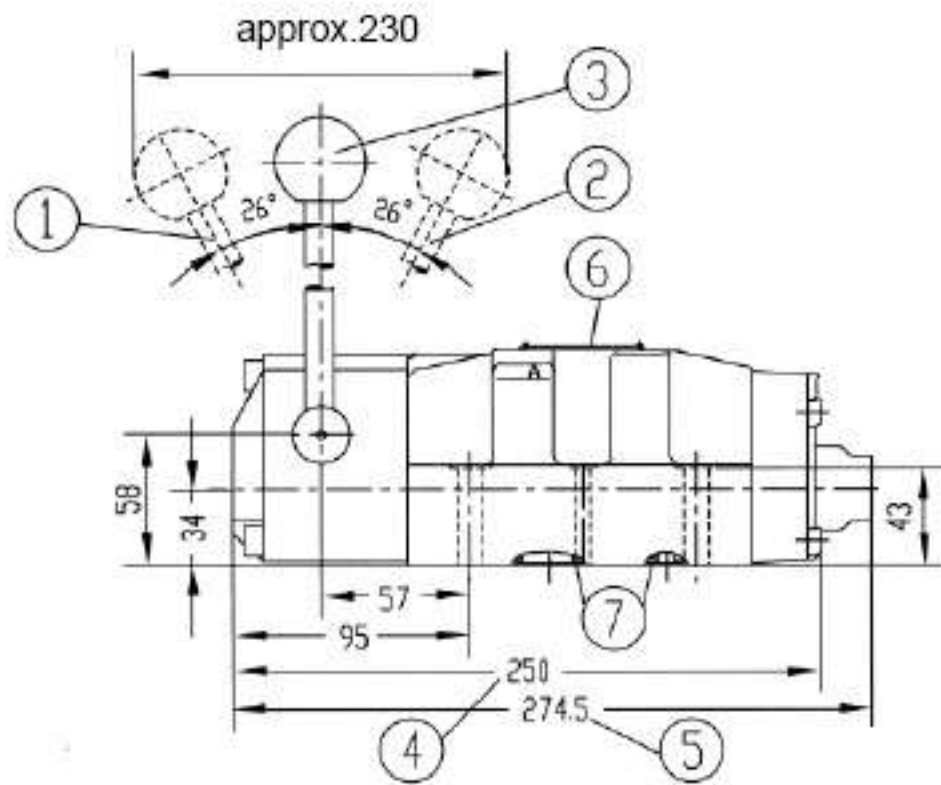

Unit dimensions of ports

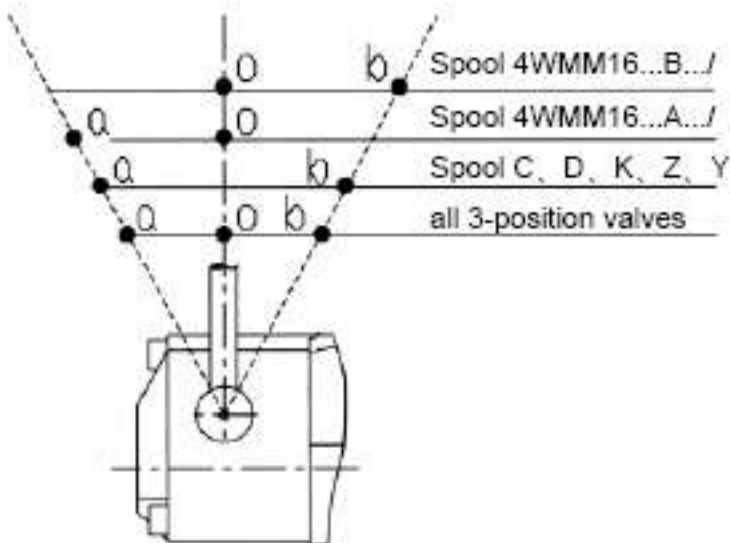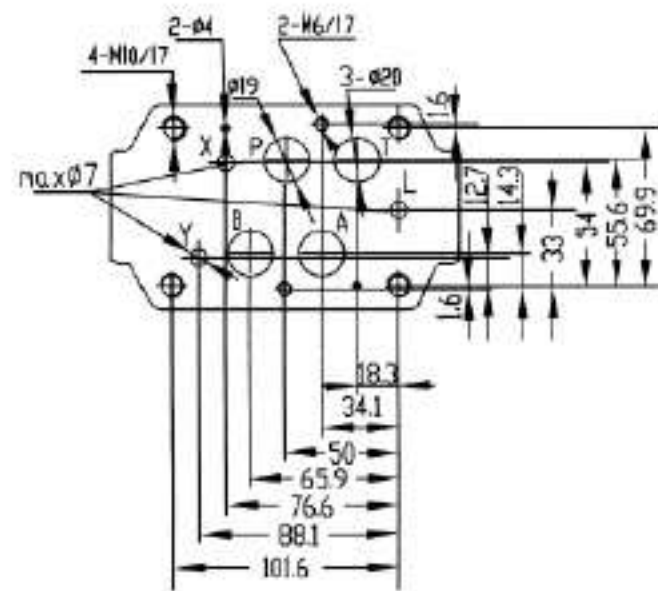

Subplates (see page 207, 208)

G172/01; G172/02

G174/01; G174/02

G174/08

1 Switched position a

2 Switched position b

3 Switched position 0 (a and b on 2-position valve)

4 2-position valve and 3-position valves, with detent.

3-position valve, spring-centred

5 2-position valve, without detent



6 Nameplate

7 O-ring 22 x 2.5 (For ports A, B, P and T)



O-ring 10 x 2 (For ports X, Y and L)

Unit dimensions: Type WMM25


(Dimensions in mm)

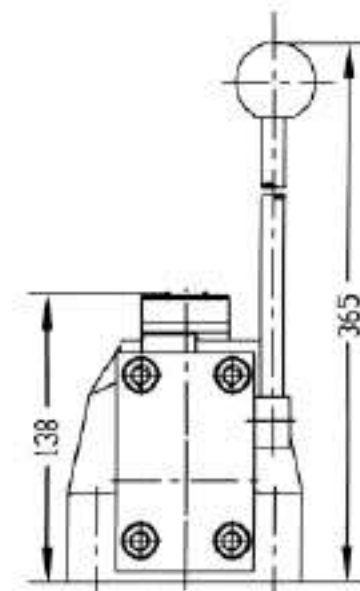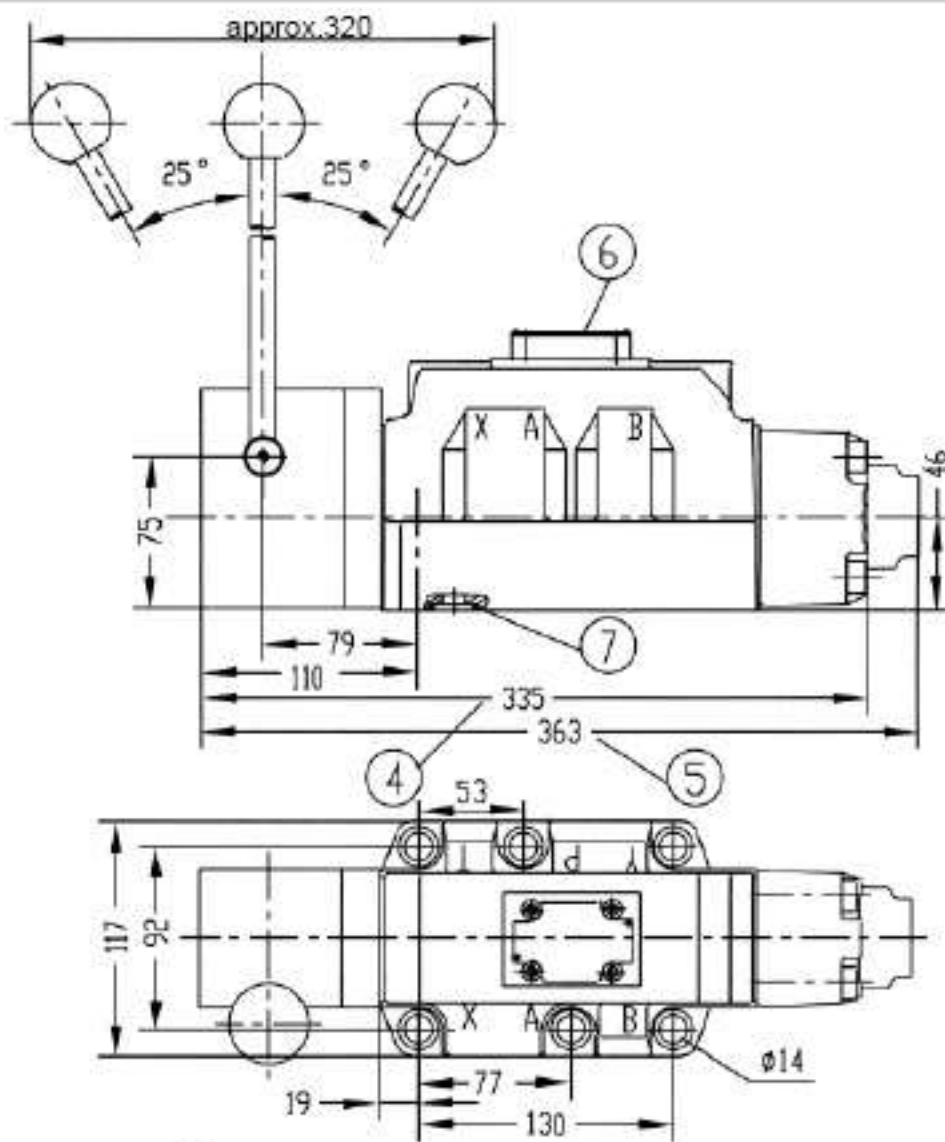

Required surface finish of mating piece

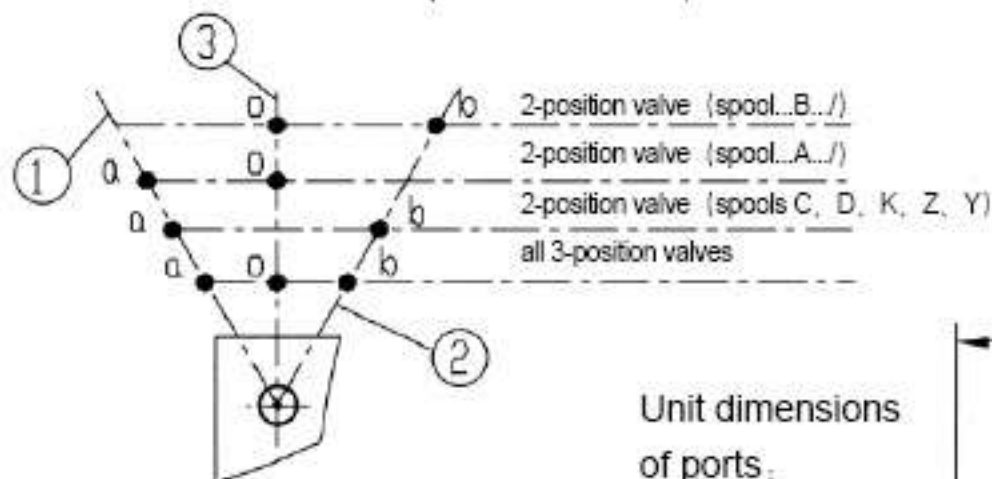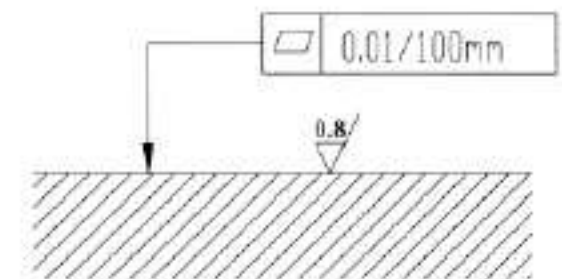

Unit dimensions of ports:

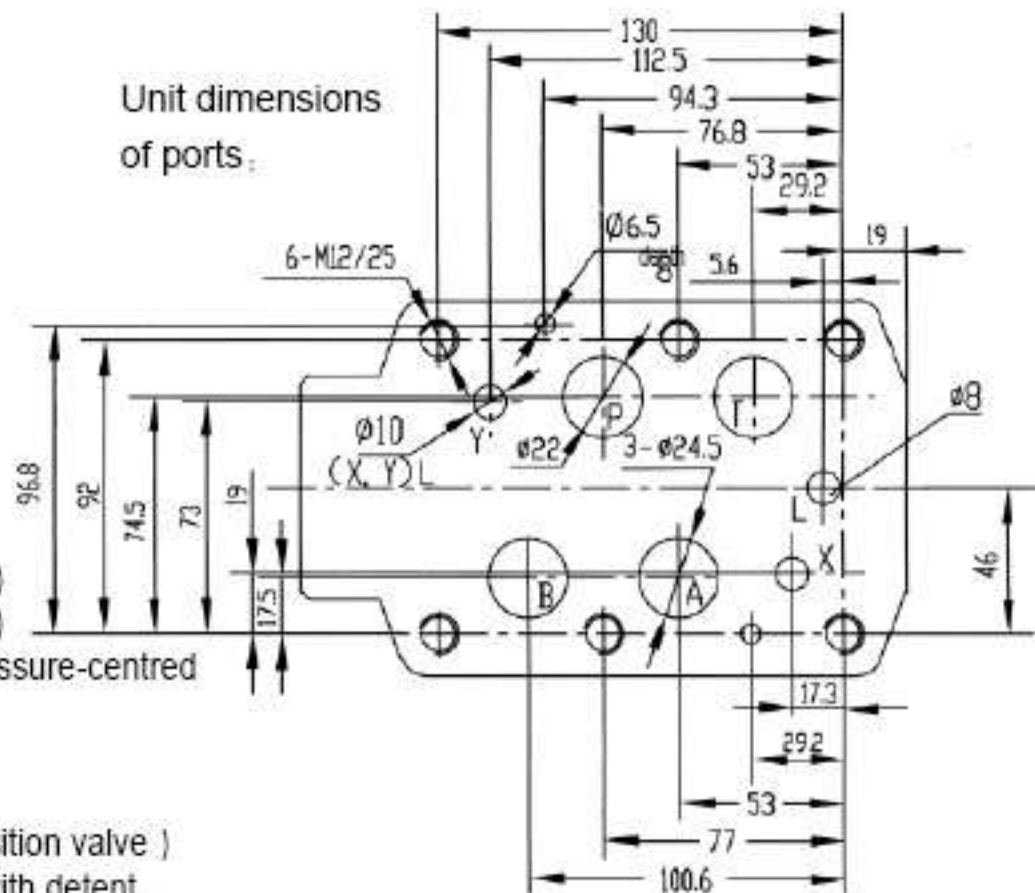

- Subplates (see page 209)
 G151/01 (G1"); G151/02 (M33X2)
 G153/01 (G1"); G153/02 (M33X2)
 G154/01 (G1 1/4"); G154/02 (M42X2)
 G156/01 (G1 1/2"); G156/02 (M48X2)
 G153 only used on valves which are pressure-centred

- 1 Switched position a
- 2 Switched position b
- 3 Switched position 0 (a and b on 2-position valve)
- 4 2-position valve and 3-position valve with detent, 3-position valve, spring-centred
- 5 2-position valve, without detent
- 6 Nameplate
- 7 O-ring 27 x 3 (for ports A, B, P and T)
 O-ring 19 x 3 (for ports X, Y and L)

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	4/3 and 4/2 directional control valves with hand lever, Type WMM (New Series)			RE 22331/12.2004
	Size10	up to 31.5 MPa	up to 120L/min	

Features:

- Direct actuated directional spool valve with hand lever
- With spring return or detent, optional
- For subplate mounting
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H




Function,section

The type WMM valves are hand lever actuated directional spool valves. They control the start, stop and direction of a flow.

The directional valves basically comprise of a housing (1), hand lever(2), control spool (3), as well as one or two return springs (4). In the unoperated condition the control spool (3) is held in the neutral or its initial position by the return springs (4). The control spool(3) is actuated via the hand lever (2), this acts via a joint and the pin(5) directly onto the control spool (3). The spool is thereby moved out of its rest position into its required switched position. After the hand lever (2) has been returned to the switched position zero, the spool (3) is returned to the neutral position via the return springs (4).

Type H-4WMM../F.. (with detent)


These valves are either 2 or 3 position directional control valves which are fitted with a detent , which operates in all of the switched positions.

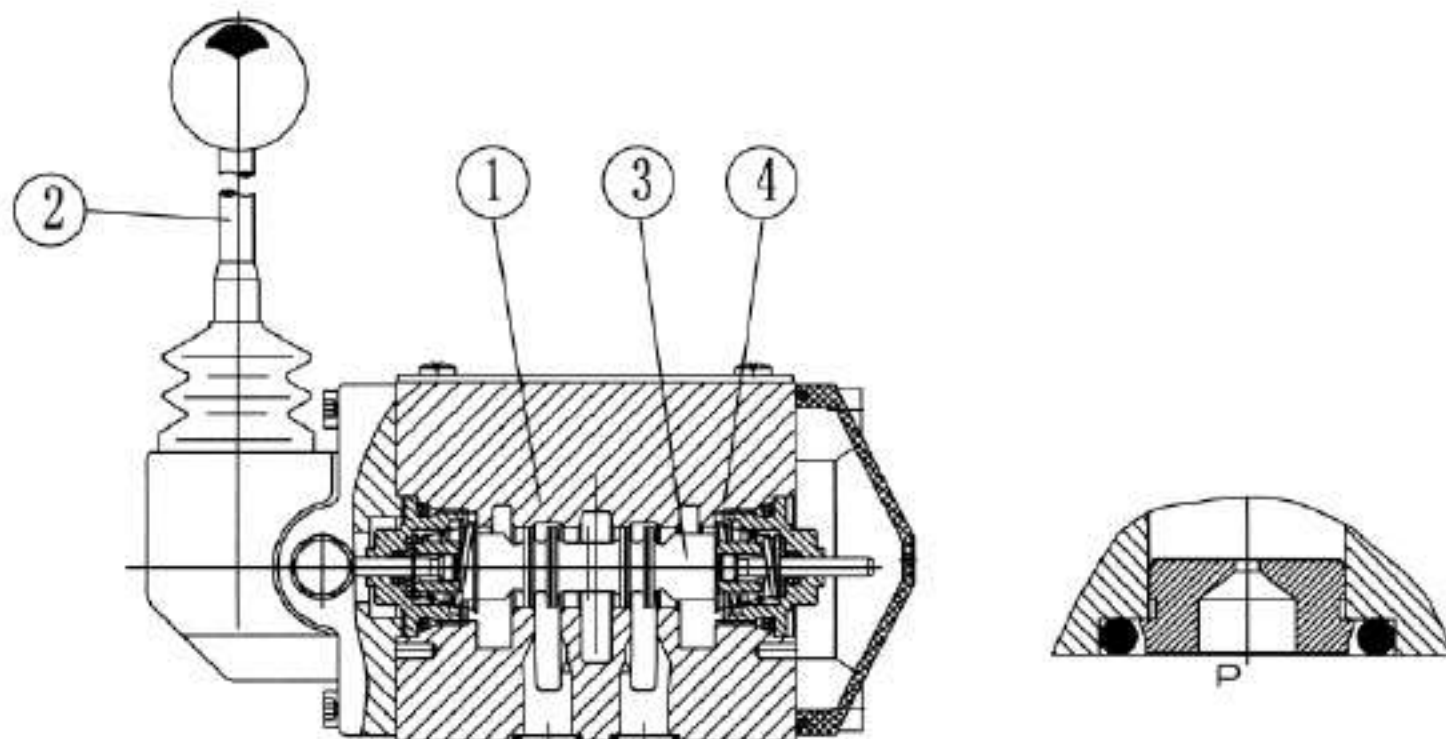

Type 4WMM

Cartridge throttle

Ordering details



3-way = 3
4-way = 4

Size 10 =10

Further etails in clear text



No code = mineral oils
V = phosphate ester

No code = Without throttle insert
B08 = Throttle ϕ 0.8 mm
B10 = Throttle ϕ 1.0 mm
B12 = Throttle ϕ 1.2 mm

No code = Spring return,without detent
F = Without spring return,with detent

B = Technology of Beijing Huade Hydraulic

30 = Series 30 (30 to 39: unchanged installation and connection dimensions)

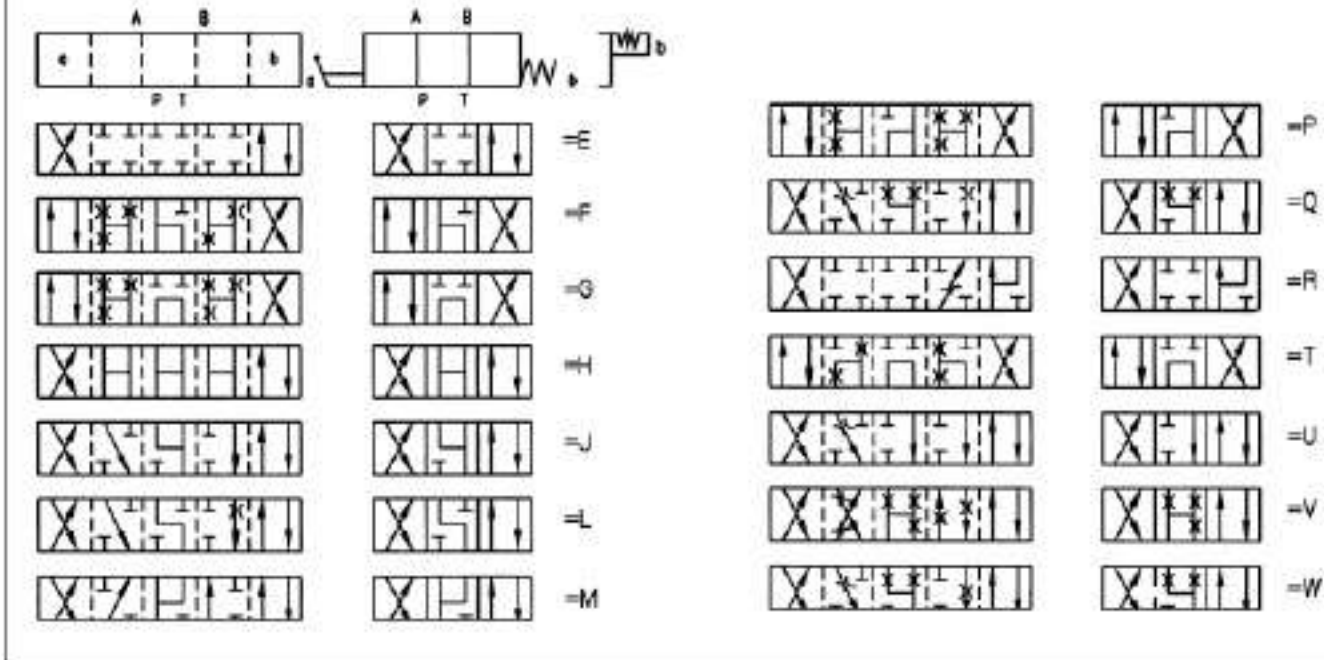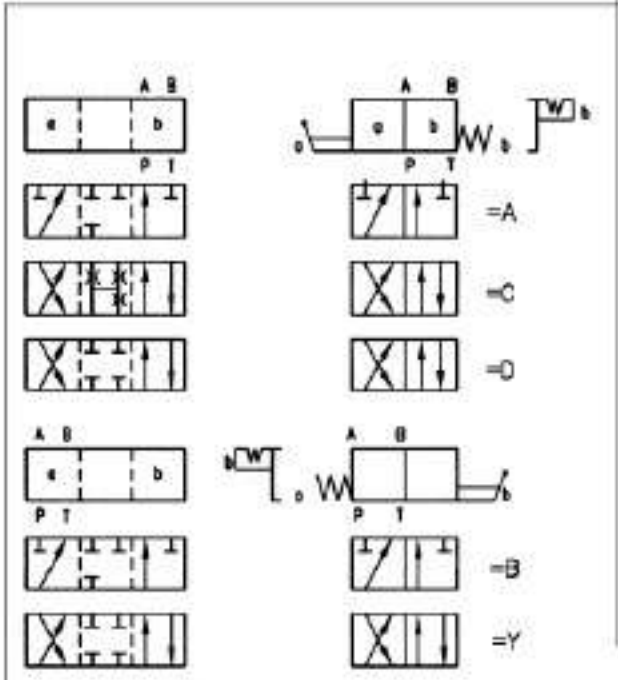


Example:
Spool E on side "a", Order example:...EA...
Spool E on side "b", Order example:...EB...

Technical data (For applications outside these parameters, please consult us!)

Size	10	
Maximum working pressure	port A, B, P (MPa)	to 31.5
	port T (MPa)	to 15
Maximum flow (L/min)	to 120	
Flow cross section (control position 0)	for symbol Q, 6% of nominal cross section	
	for symbol W, 3% of nominal cross section	
Pressure fluid	Mineral oils(for NBR seal) or phosphate ester(for FPM seal)	
Fluid temperature range (°C)	-30~+80	
Viscosity range (mm ² /s)	2.8~500	
Weight (kg)	approx.3.3	
Control power on handle (N)	with detent approx.16~23	
	without detent approx.20~27	

Characteristic curves (measured at $\nu = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

Characteristic curves:

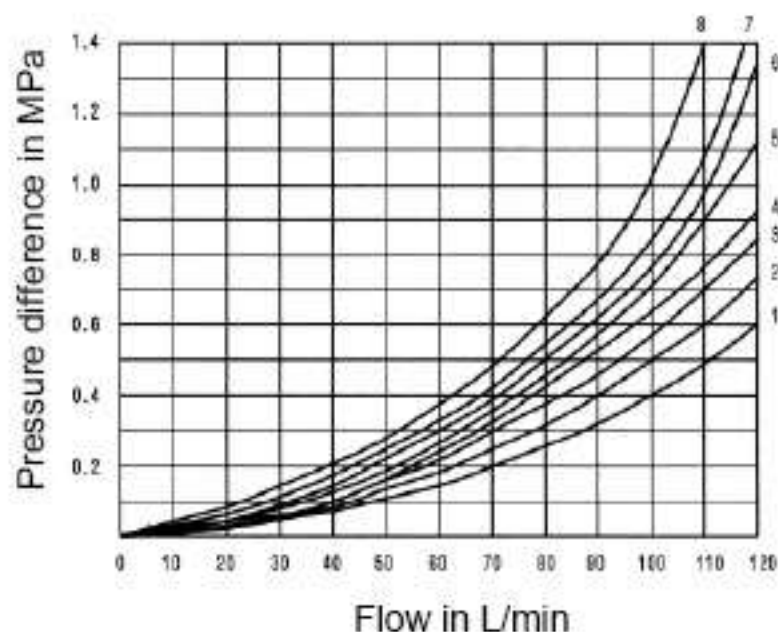


Spool	Shifted position			
	P → A	P → B	A → T	B → T
A	4	3	-	-
B	3	4	-	-
C	3	3	4	4
D	3	3	5	5
Y	4	4	6	6
E	2	2	4	4
F	1	2	3	4
G, T	4	4	7	7
H	1	1	5	5
J	2	2	3	3
L	3	3	2	4
M	1	1	4	4
P	3	1	5	5
Q	2	2	2	2
R	3	4	3	-
U	3	3	5	2
V	2	2	3	3
W	3	3	3	3

7 Spool "R" at controller position A to B
 8 Spool "G" and "T" at middle position P to T

Characteristic curves:


Characteristic curves:	Spool
1	A, B
2	A/O
3	H
4	F, G, P, R, T
5	J, L, Q, U, W
6	C, D, E, M, V, Y
7	C/O, C/O F, D/O/D/O F

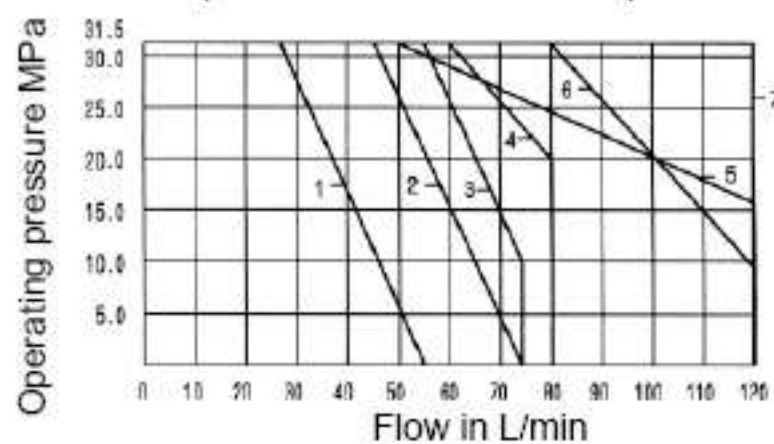

Unit dimensions:

(Dimensions in mm)

Type WMM10

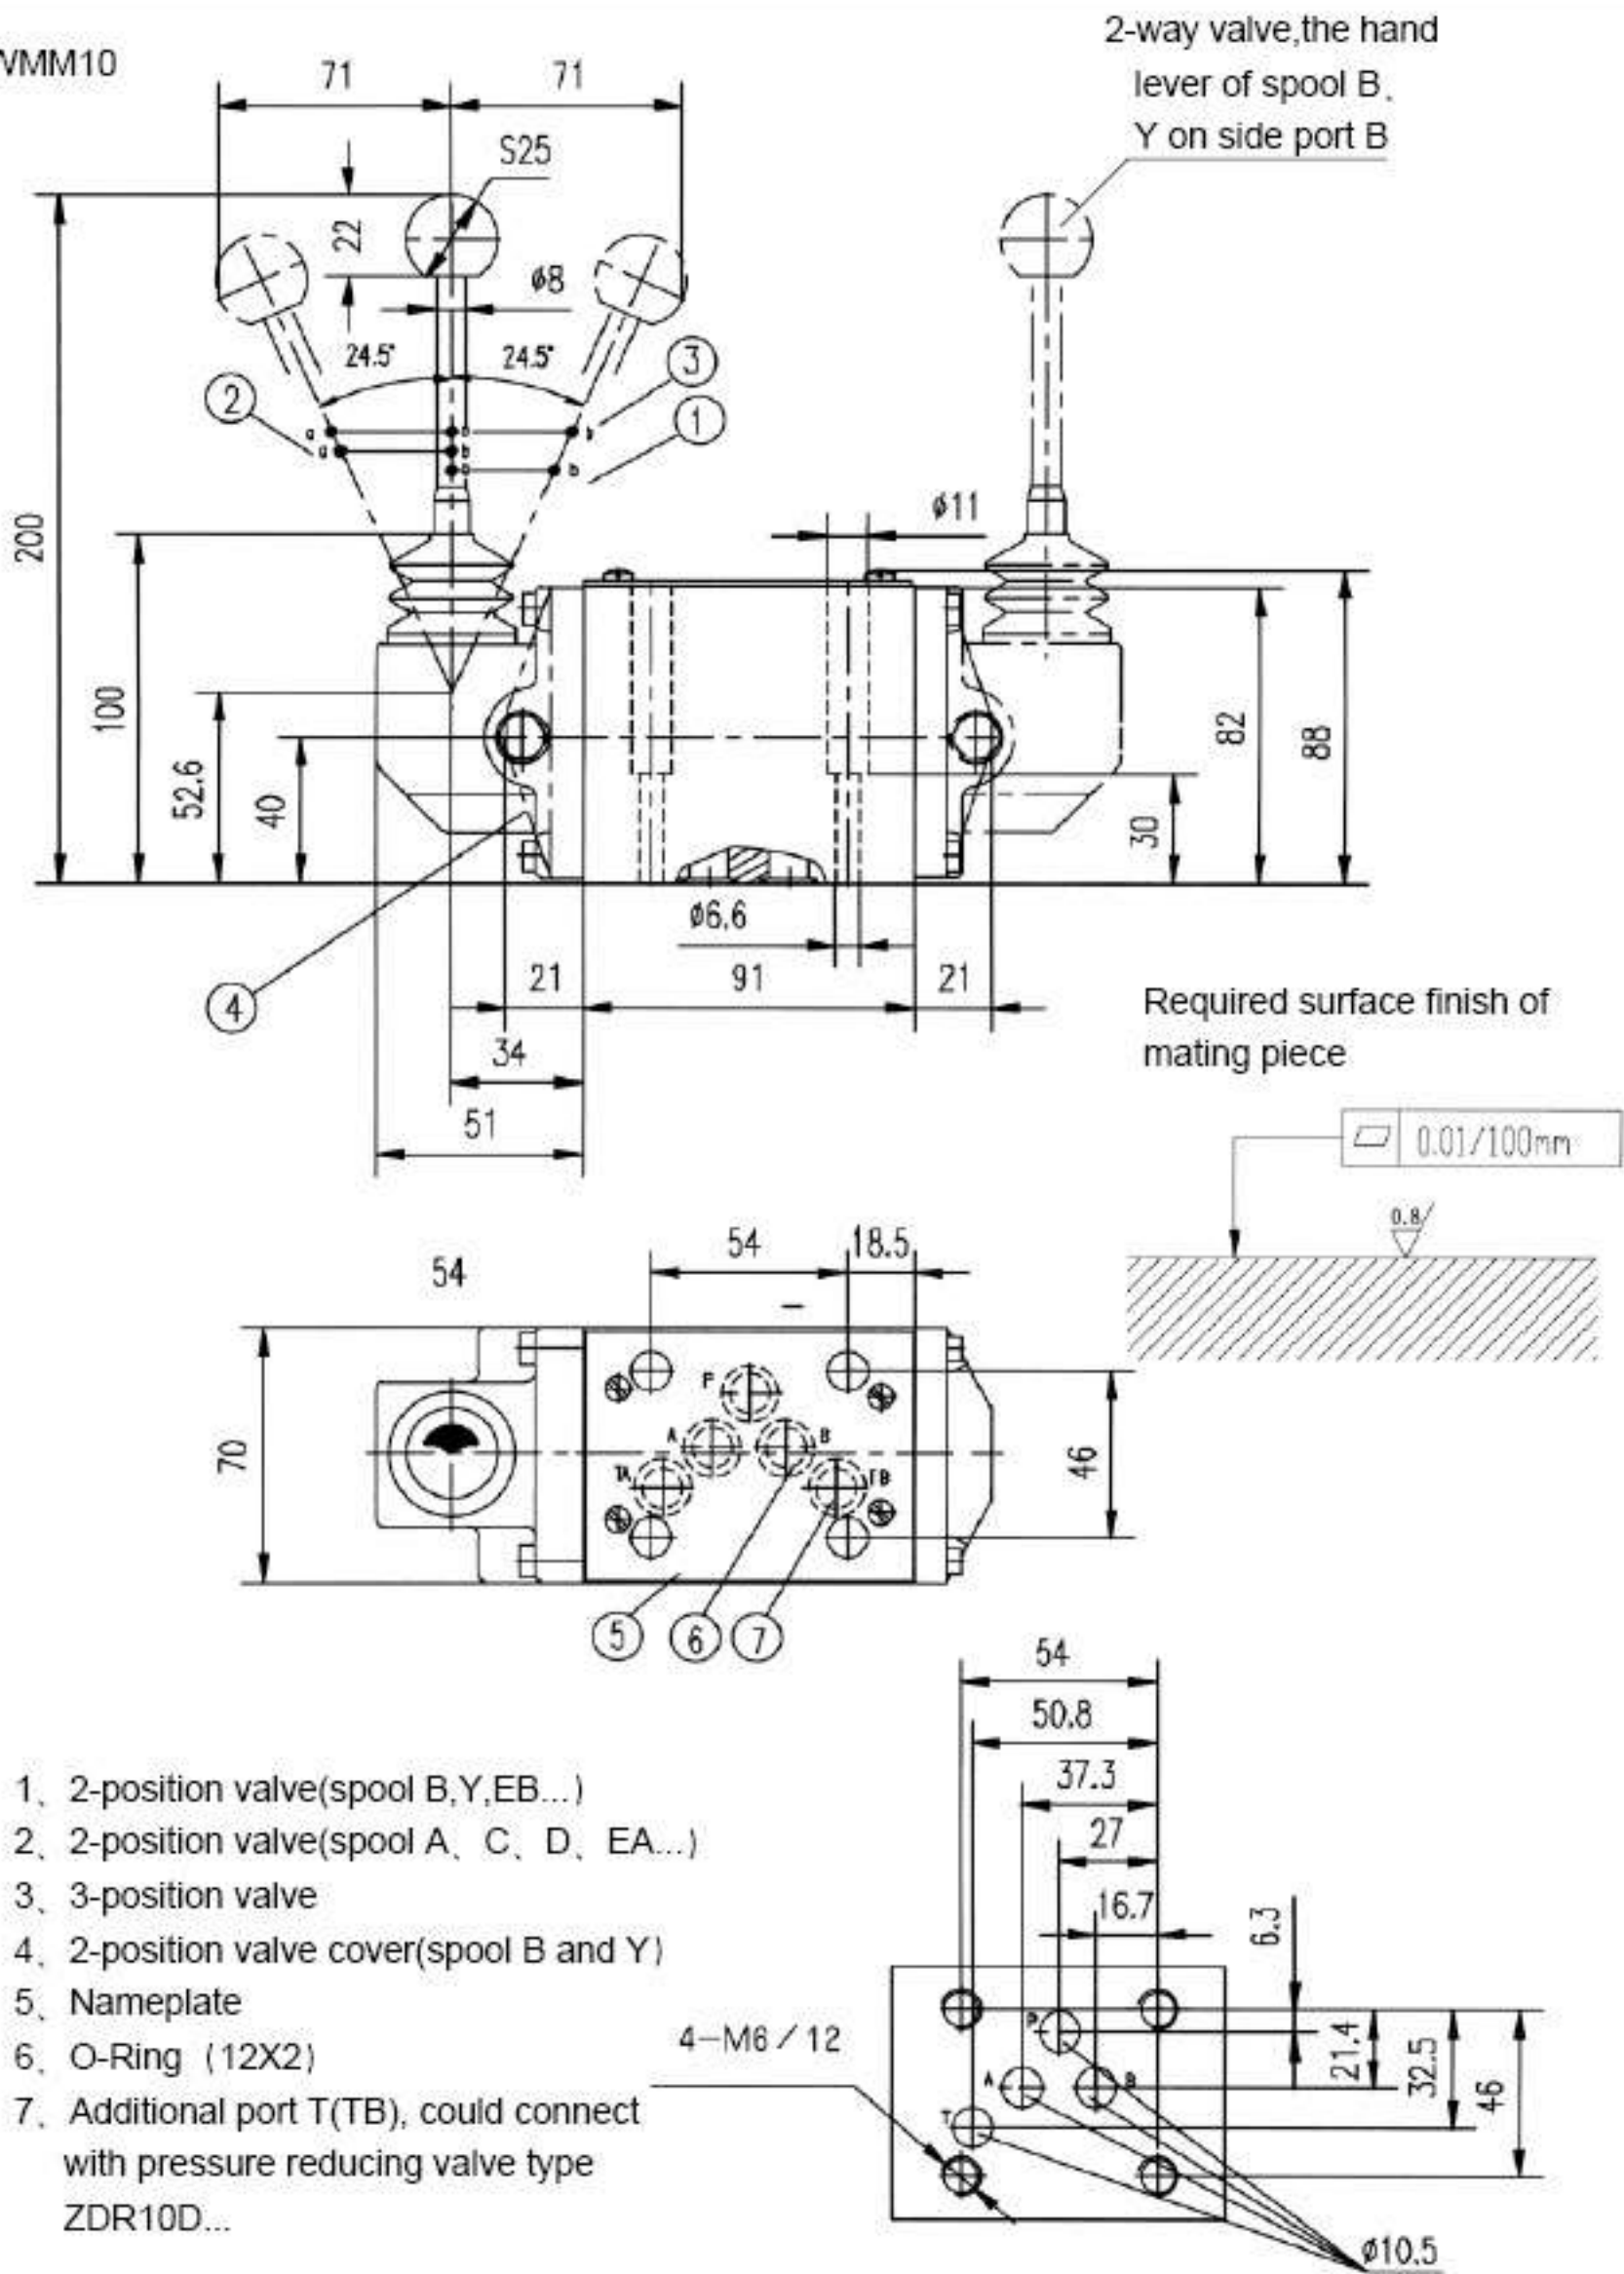

- 1, 2-position valve (spool B, Y, EB...)
- 2, 2-position valve (spool A, C, D, EA...)
- 3, 3-position valve
- 4, 2-position valve cover (spool B and Y)
- 5, Nameplate
- 6, O-Ring (12X2)
- 7, Additional port T (TB), could connect with pressure reducing valve type ZDR10D...

Subplate: see page 206

G66/01 (G3/8"); G66/02 (M18X1.5)

G67/01 (G1/2"); G67/02 (M22X1.5)

G534/01 (G3/4"); G534/02 (M27X2)

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valve ,Type B-H10			RE 23400/12.2004
	Size10	up to 25MPa	up to 80L/min	

Features:

- Direct actuated directional spool valve with hand lever
- With spring return or detent, optional
- Pipe installation





Function, section



The type B-H10 valves are hand lever actuated directional spool valves.

They control the start, stop and direction of a flow.

The directional valves basically comprise of a housing (1), hand lever(4), control spool (2), as well as one return springs (3). In the unoperated condition the control spool (2) is held in the neutral or its initial position by the return springs (3). The control spool(2) is actuated via the hand lever (4), this acts via a joint and the pin directly onto the control spool (2). The spool is thereby moved out of its rest position into its required switched position. After the hand lever (4) has been returned to the switched position zero, the spool (2) is returned to the neutral position via the return springs (3).

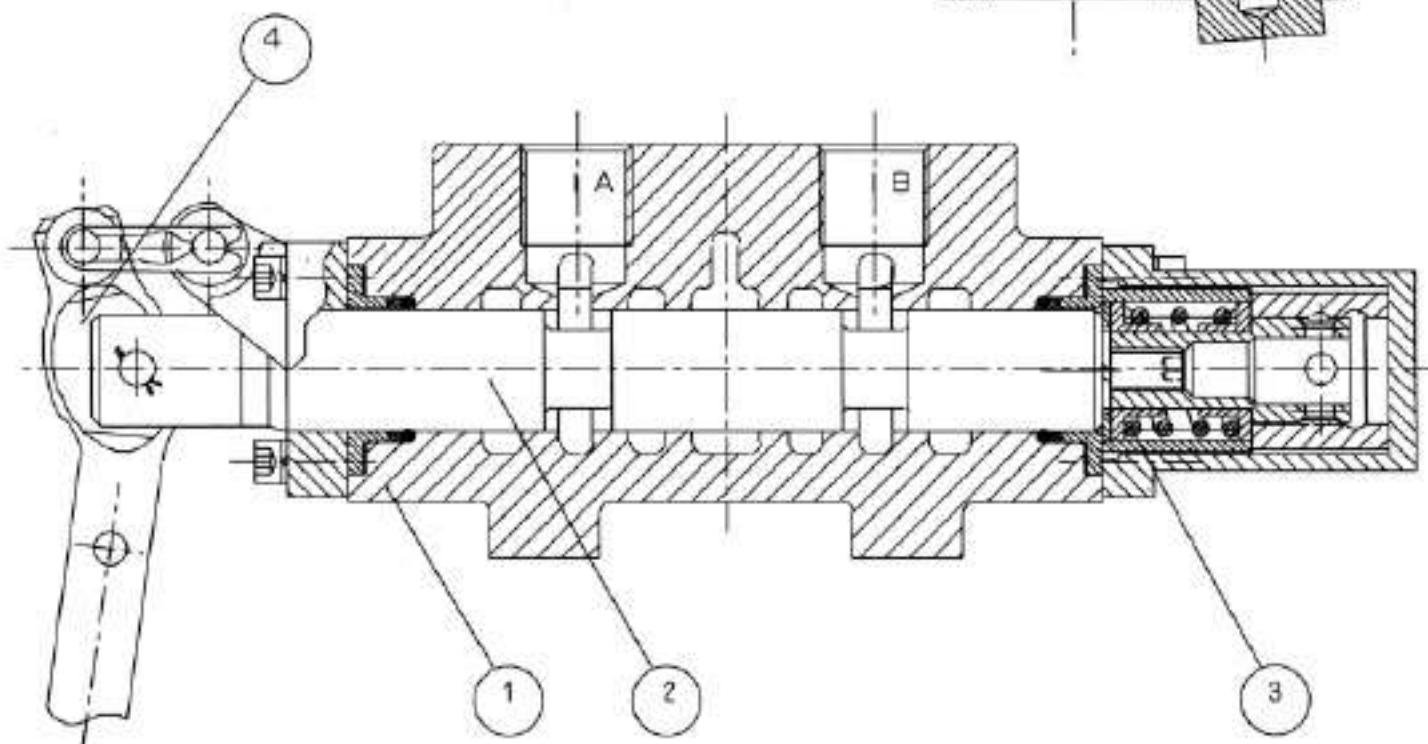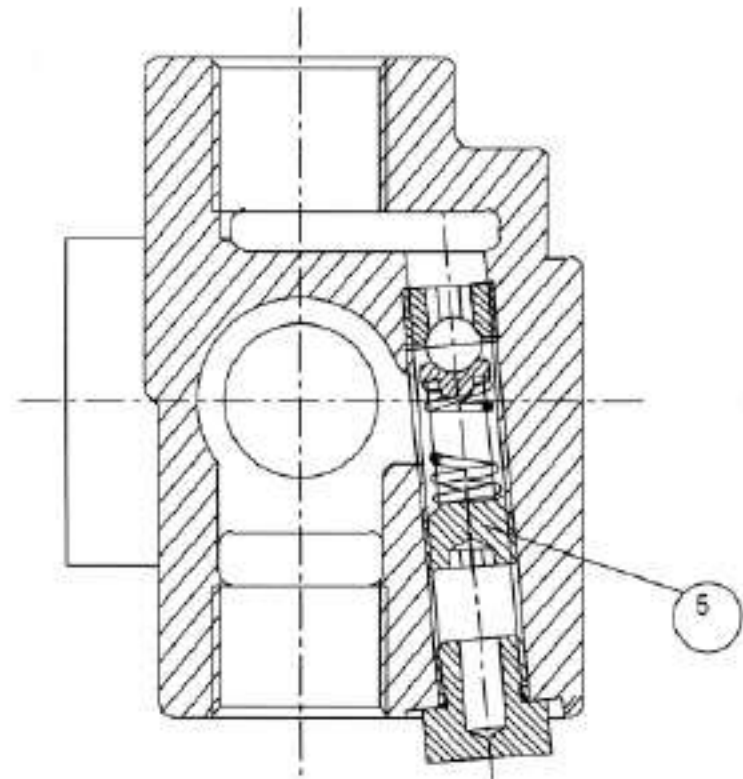


Ordering details

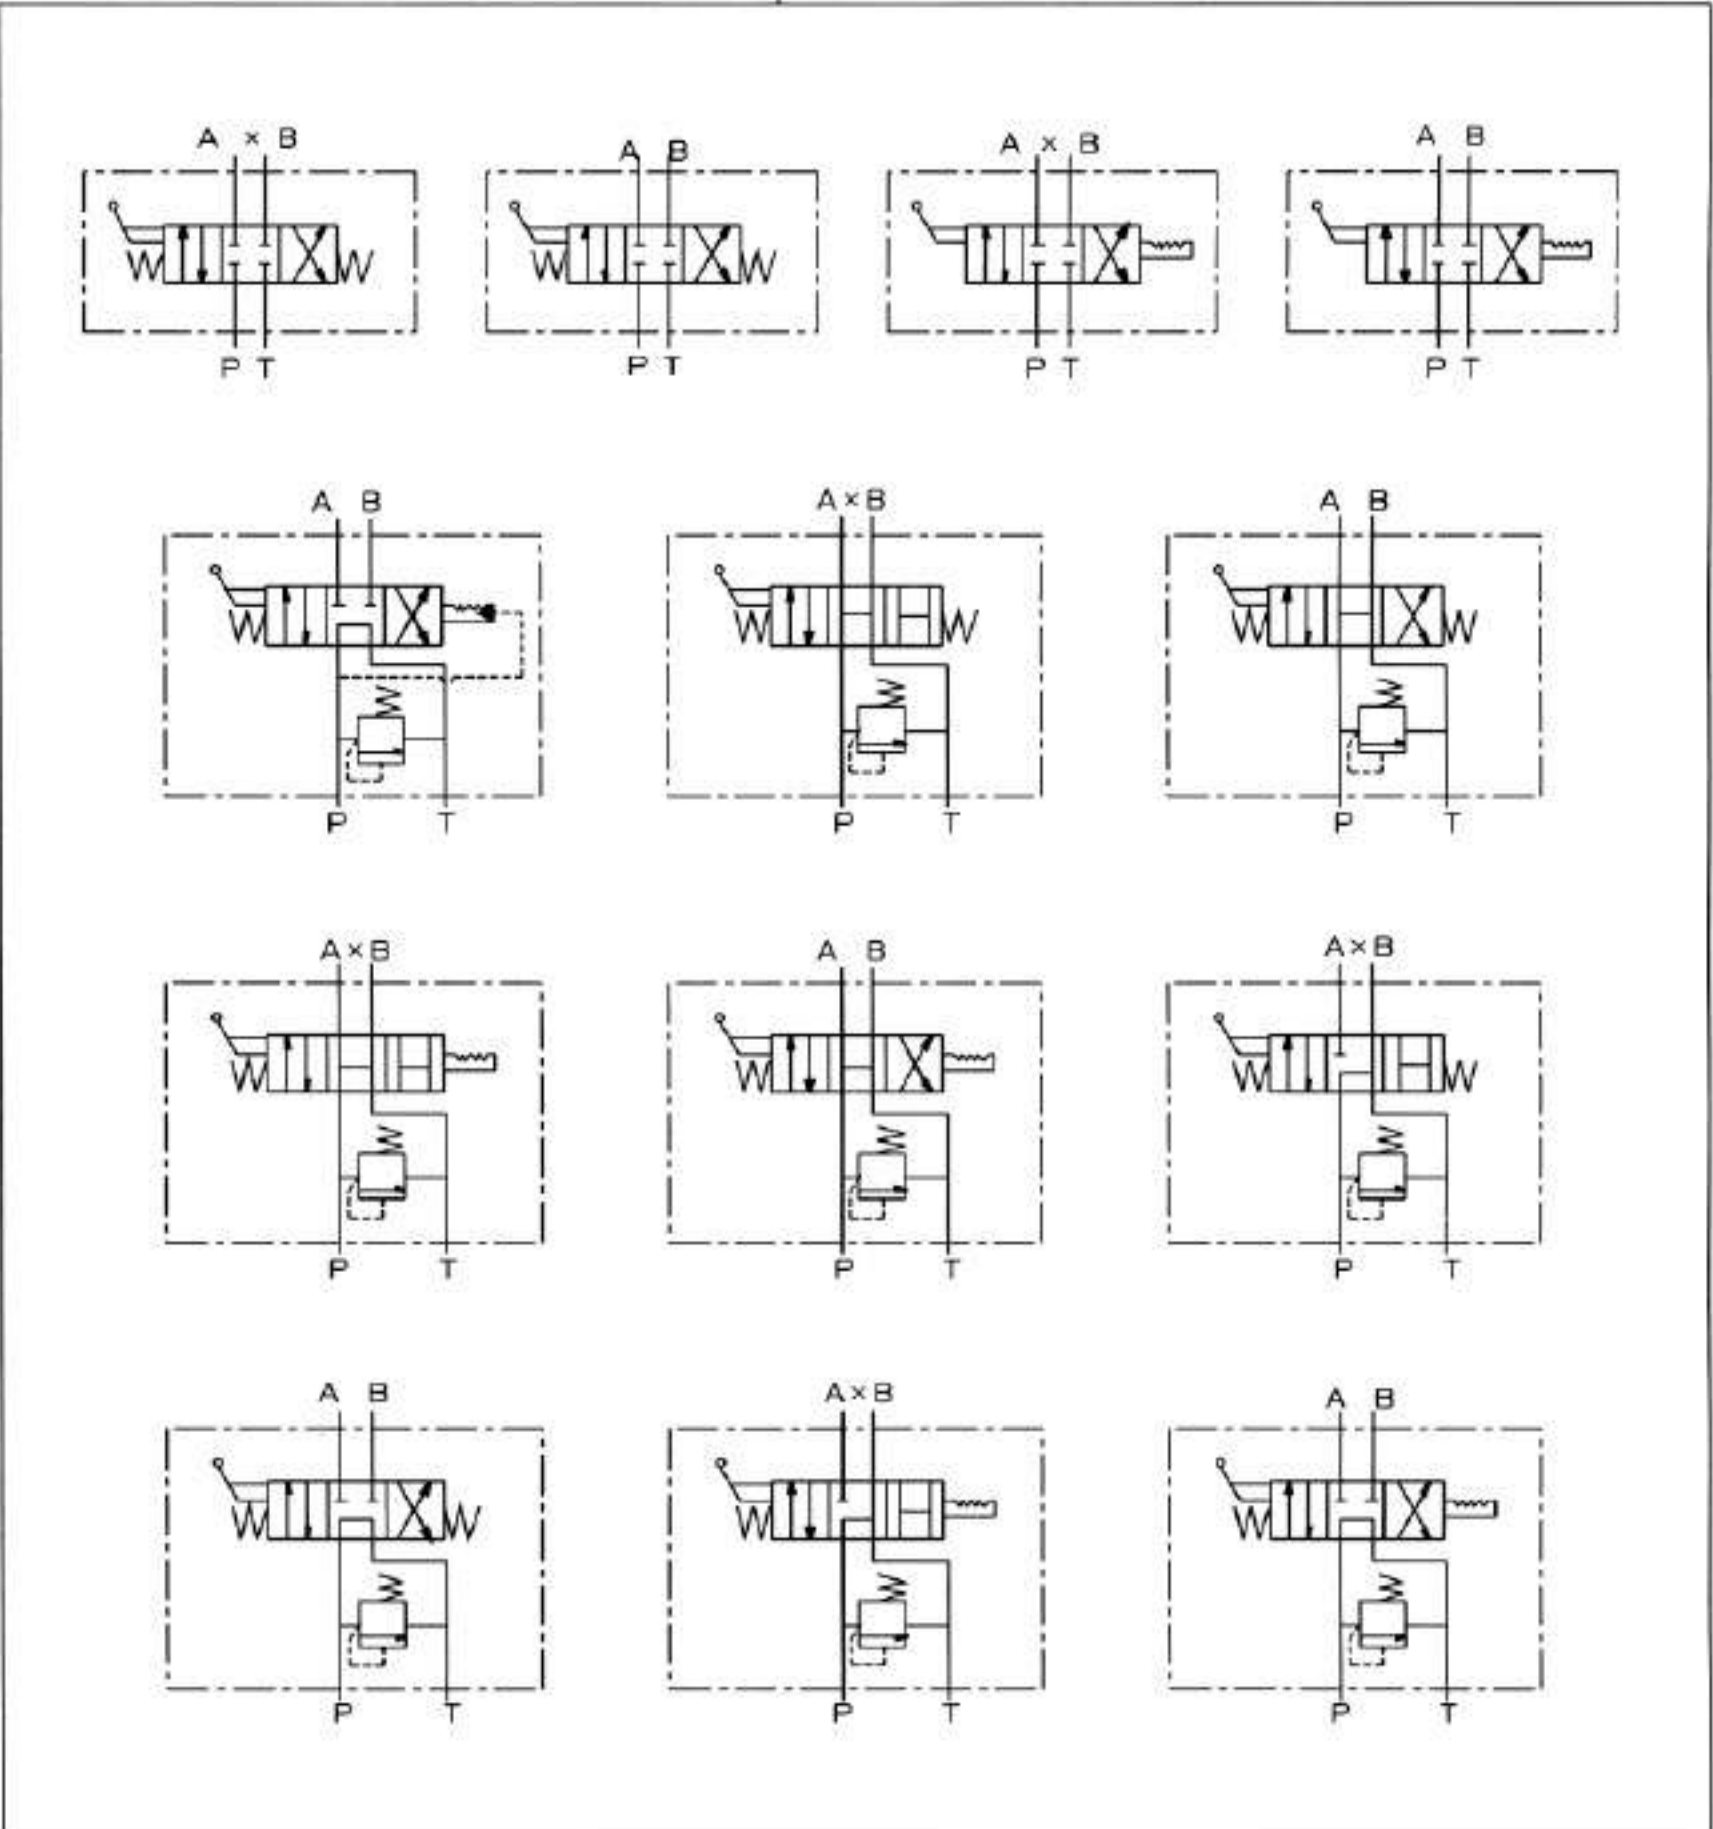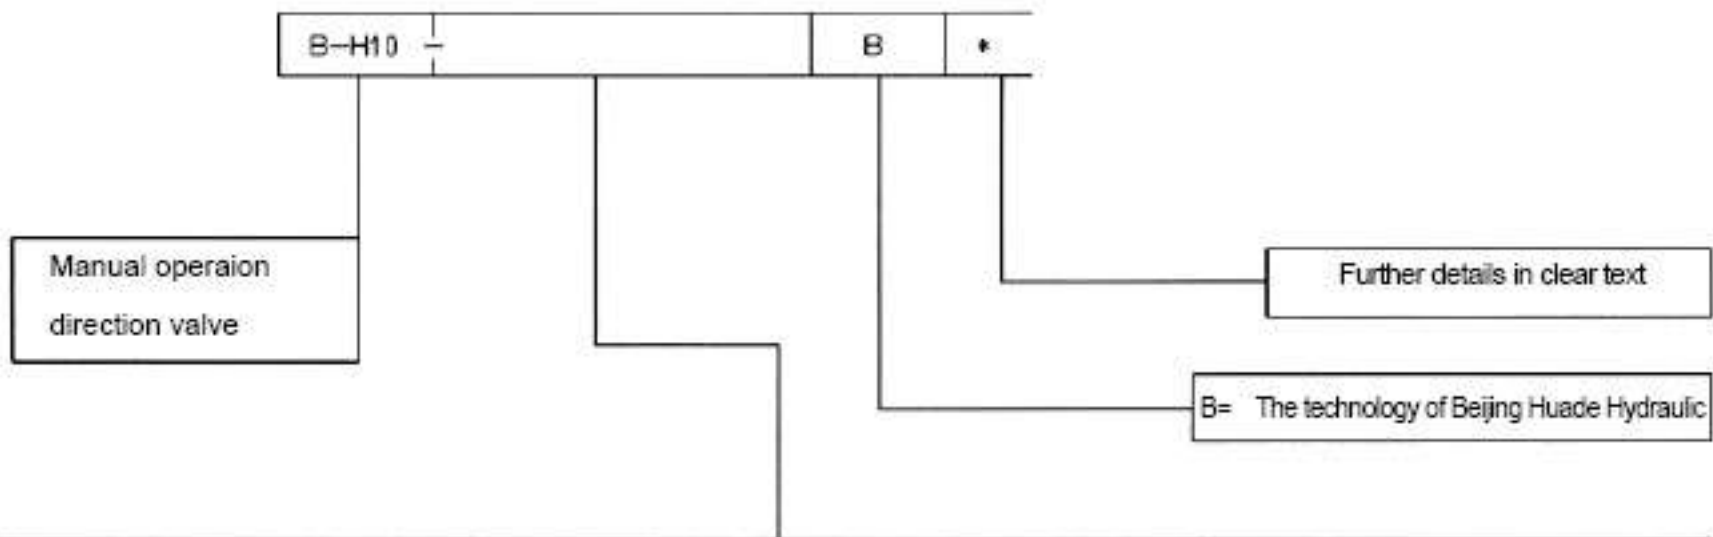

Unit dimensions

(Dimensions in mm)

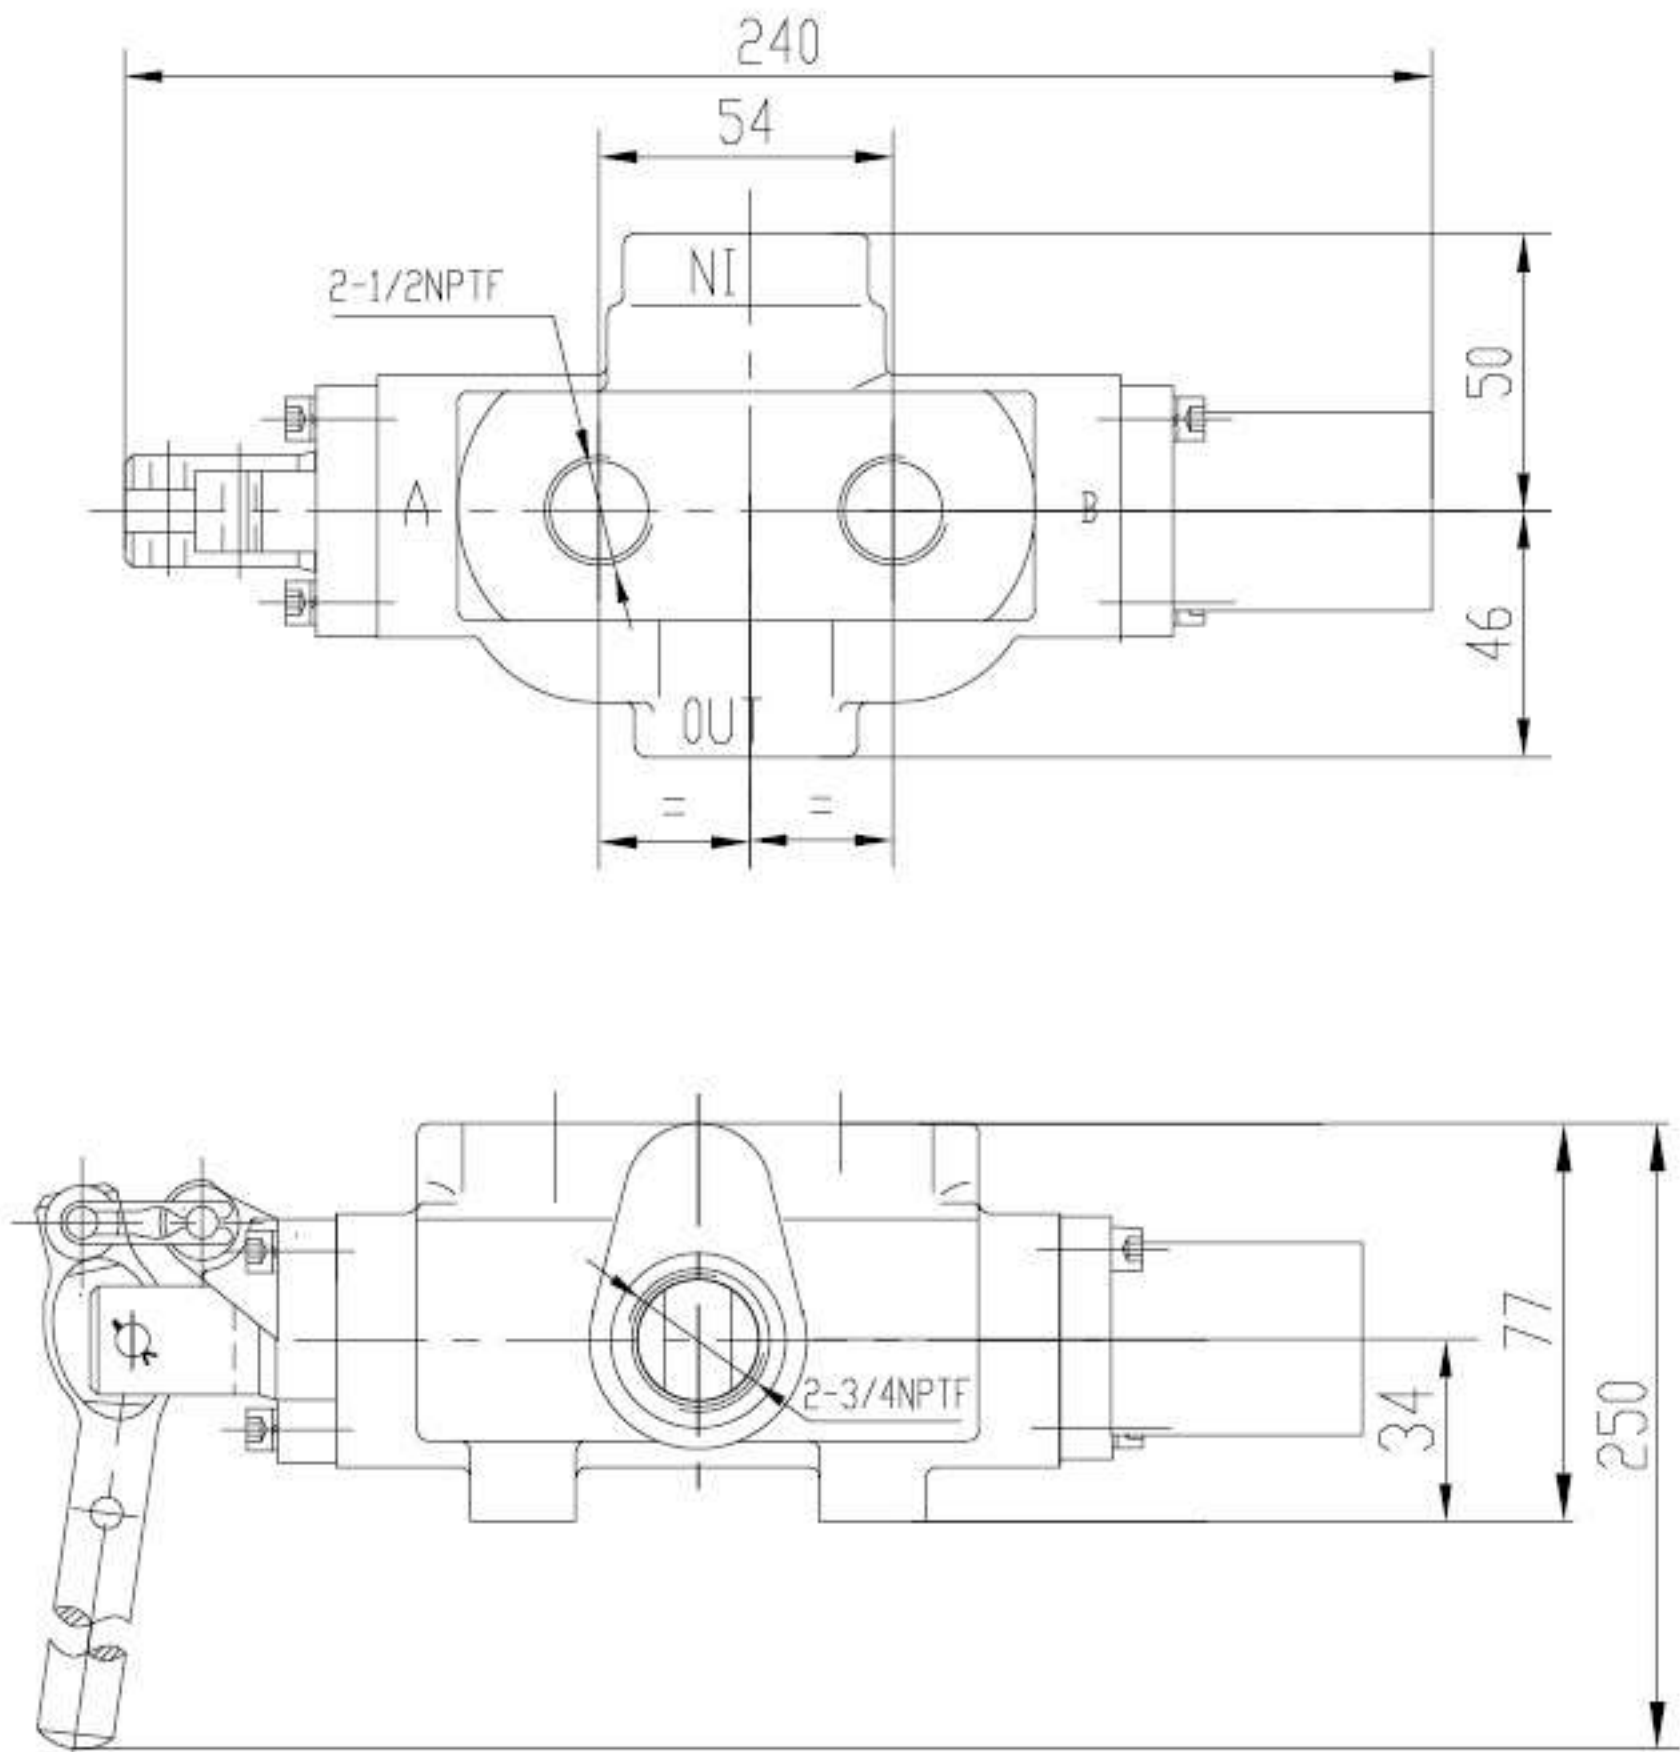

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves mechanical operation Type 4WMU/R			RE 22275/12.2004
	Size 6 , 10	up to 31.5 MPa	up to 120L/min	Replaces; RE 22275/05.2001

Features:

- Direct operated directional spool valve with adjustable roller operation
- Roller lever assembly may be stepped in 90°
- Radial forces absorb reliably (up to 30°)
- 19 kinds standard spool function





Function,section

Directional valves type WMR are roller operated directional valves.

They basically consist of the housing (1), the roller lever (2), the control spool (3) and the return spring (4).



A plug-in throttle is required if flow greater than the permitted value may occur while the valve spool is being from one position to another. The plug-in orifice is fitted in the P port of the directional valve.

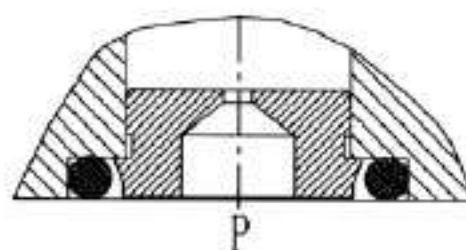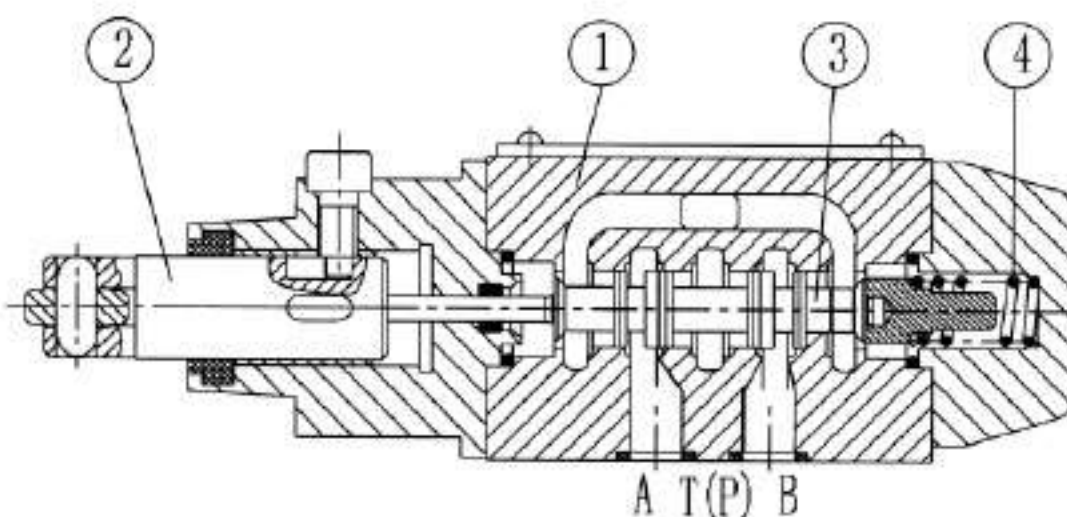
Type 4WMR6



Cartridge throttle

Ordering details

	WM					B	/		*
Further details in clear text									
No code = mineral oils V = phosphate ester									
No code = Without throttle insert B08 = Throttle ϕ 0.8 mm B10 = Throttle ϕ 1.0 mm B12 = Throttle ϕ 1.2 mm									
B = The technology of Beijing Huade Hydraulic									
3 service ports = 3 4 service ports = 4									
 = U  = R									
Size 6 = 6 Size 10 = 10									
50 = Series 50 to 59 (50 to 59: unchanged installation and connection dimensions) (for size 6)									
30 = Series 30 to 39 (30 to 39: unchanged installation and connection dimensions) * (for size10)									

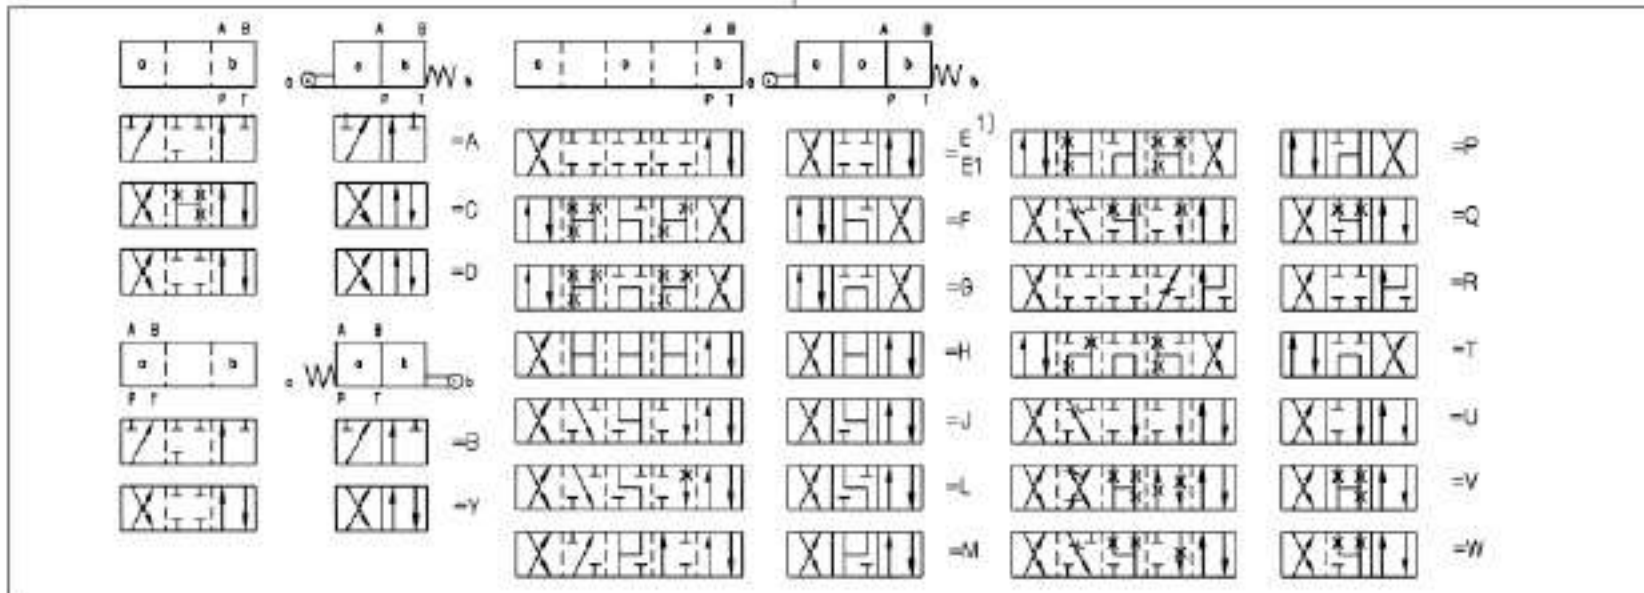

1) Symbol E1:P to A and B with pre-opening


Warning: please consider pressure intensification with single rod cylinders

Technical data

Size	6		10	
Operating ports A, B, P (MPa)	up to 31.5			
Pressure port T (MPa)	up to 6		up to 16	
In symbols A and B, the T port must be used as a drain connection if the operating pressure is above the pressure permitted at the T port				
Max. flow (L/min)	up to 60		up to 120	
Flow cross section (control position 0)	for symbol Q, 6% of nominal cross section for symbol W, 3% of nominal cross section			
Pressure fluid	Mineral oils (for NBR seal) or phosphate ester (for FPM seal)			
Pressure fluid temperature range (°C)	- 30 to + 80			
Viscosity range (mm ² /s)	2.8 to 500			
Weight (kg)	approx. 1.4		approx. 3.3	
Operating force at roller lever (N)	at zero tank pressure	100 to 121	two positions valve	70 to 140
	at a pressure	184 to 205	three positions valve	70 to 175

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

WM_U^R6

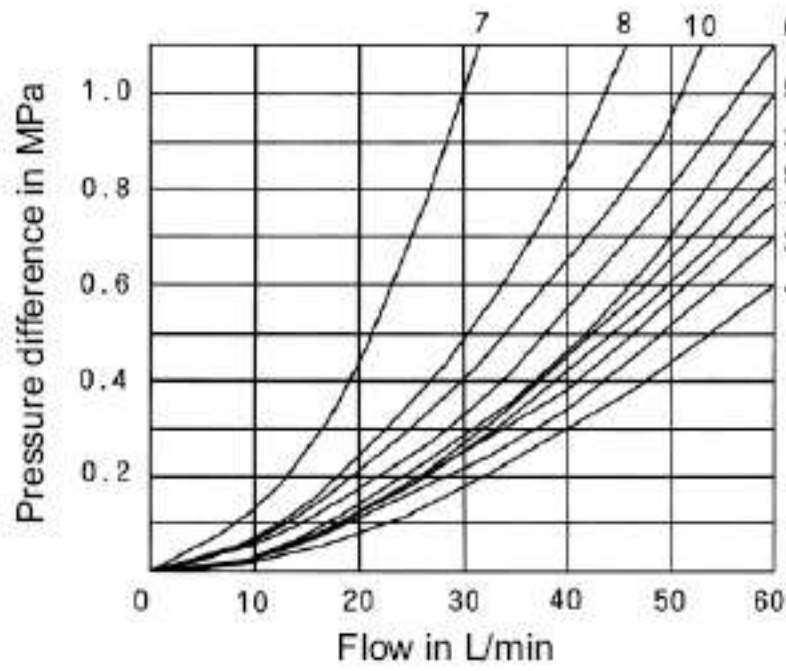


Symbols	Direction of flow			
	P→A	P→B	A→T	B→T
A	3	3	-	-
B	3	3	-	-
C	1	1	3	1
D	5	5	3	3
E	3	3	1	1
F	1	3	1	1
G	6	6	9	9
H	2	4	2	2
J	1	1	2	1
L	3	3	4	9
M	2	4	3	3
P	3	1	1	1
Q	1	1	2	1
R	5	5	4	-
T	10	10	9	9
U	3	3	9	4
V	1	2	1	1
W	1	1	2	2
Y	5	5	2	3

7. Symbol "R" with position A-B

8. Symbols "G" and "T" with mid position P-T

WM_U^R10

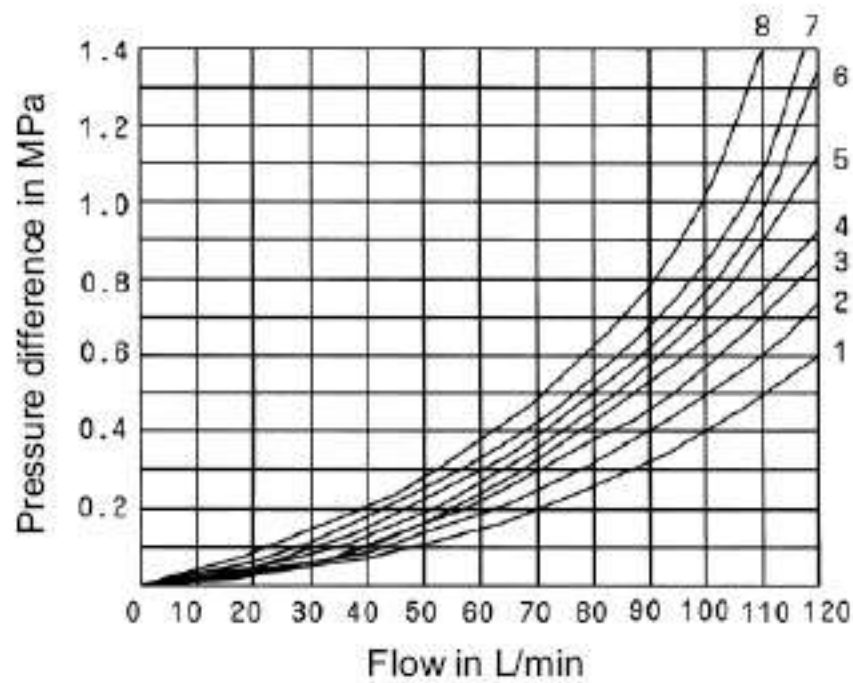

Symbols	Direction of flow			
	P→A	P→B	A→T	B→T
A	4	3	-	-
B	3	4	-	-
C	3	3	4	4
D	3	3	5	5
Y	4	4	6	6
E	2	2	4	4
F	1	2	3	4
G, T	4	4	7	7
H	1	1	5	5
J	2	2	3	3
L	3	3	2	4
M	1	1	4	4
P	3	1	5	5
Q	2	2	2	2
R	3	4	3	-
U	3	3	5	2
V	2	2	3	3
W	3	3	3	3

7. Symbol "R" with position A-B




8. Symbols "G" and "T" with mid position P-T

Performance limits (measured at $v=41\text{mm}^2/\text{s}$ and $t=50\text{ }^\circ\text{C}$)

The operation of the valve is dependent upon the effect of filtration. In order to achieve the given permissible flow rates, full flow filtration $20\mu\text{m}$ is required. The flow forces operating within the valve influence the valve performance. For 4 way valves, the flows given are valid for normal operation with 2 directions of flow (e.g. from P to A and from B to T) If only one flow path is operative e.g. if port A or B is blocked and the valve is used as a 3 way valve, the permissible flows can be very much lower.


WM^R_U 6




Curve	symbol
1	A, B
2	C, D, Y, E, E1, H, M, Q, U, W
3	F, P
4	G
5	J, L
6	R
7	T
8	V

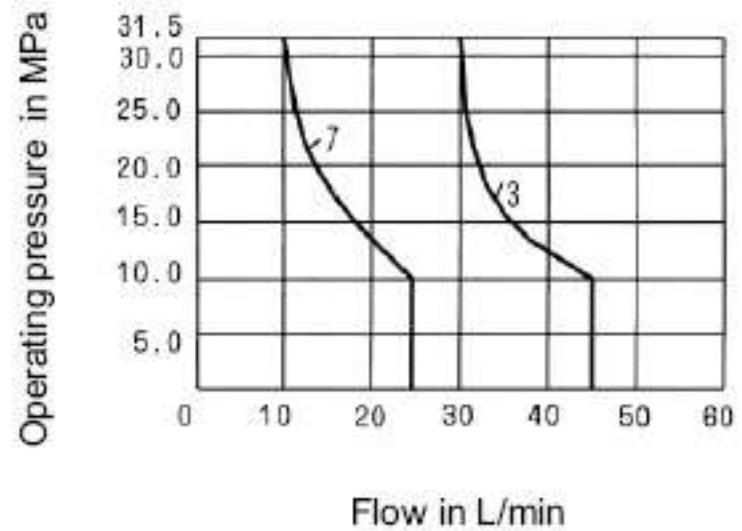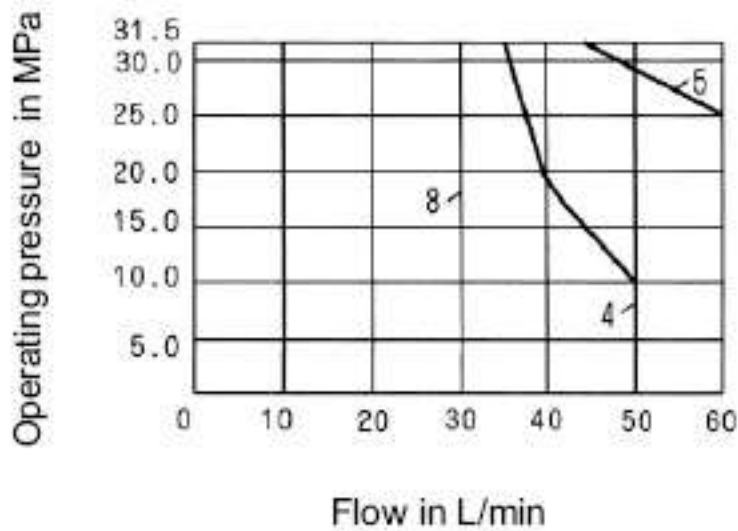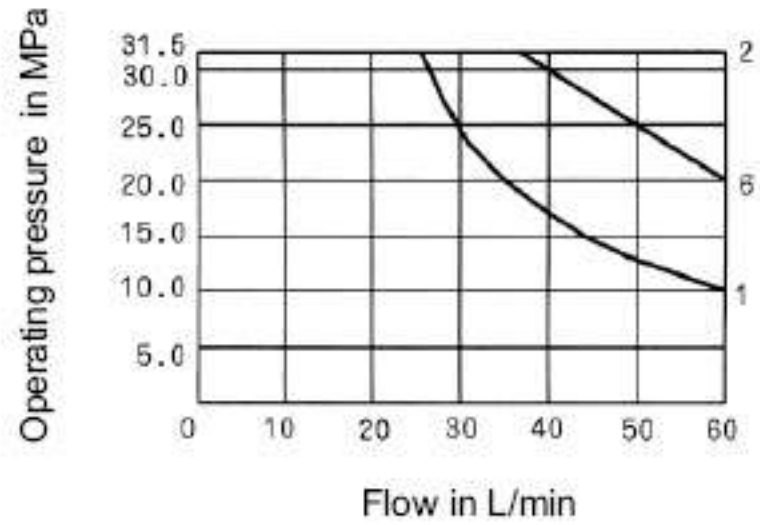

WM^R_U 10

Curve	Symbol
1	A, B
2	H
3	F, G, P, R, T
4	J, L, Q, U, W
5	C, D, E, M, V, Y

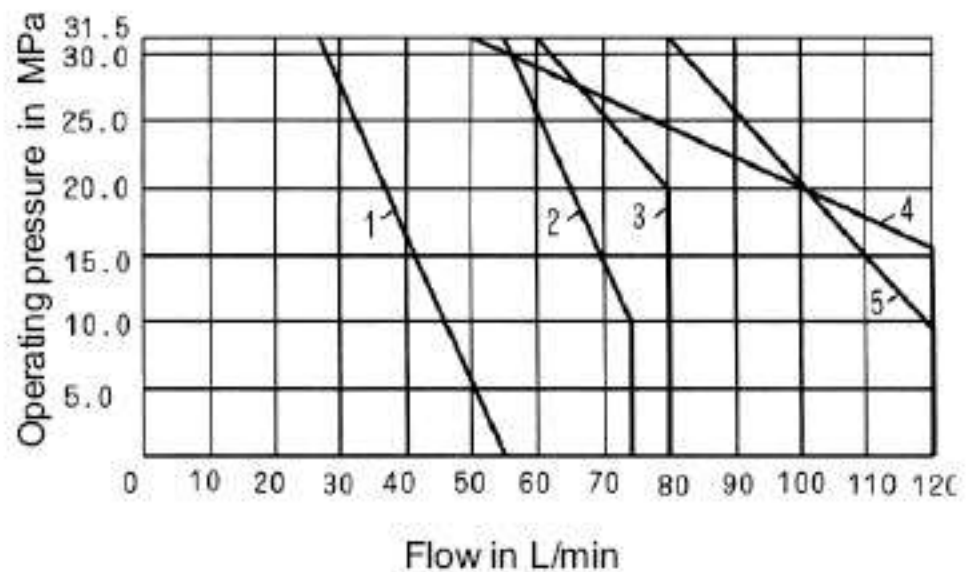

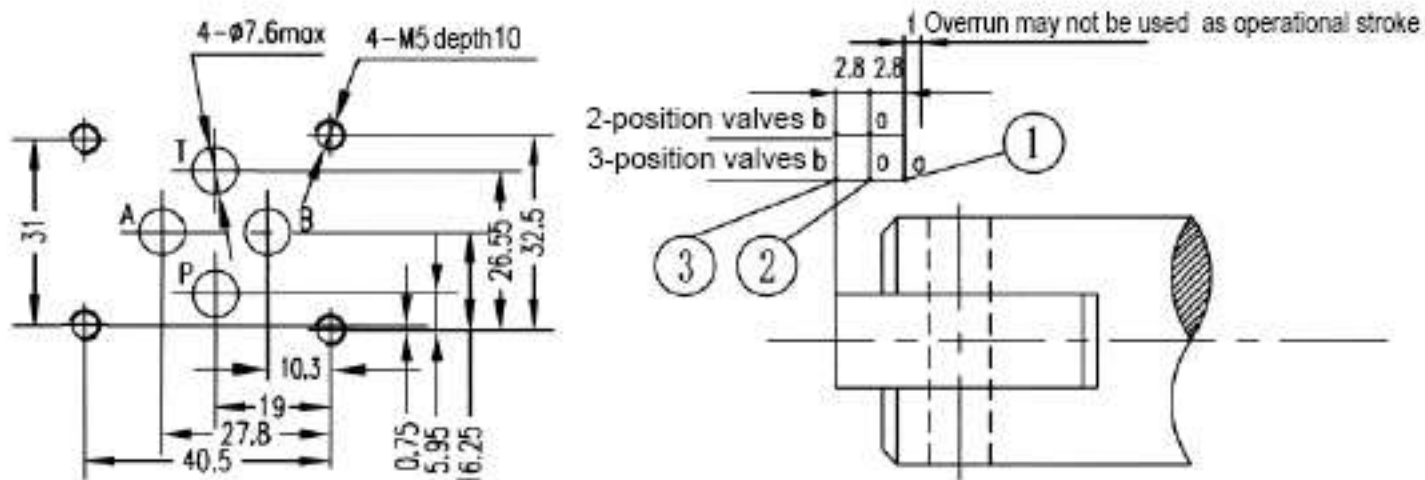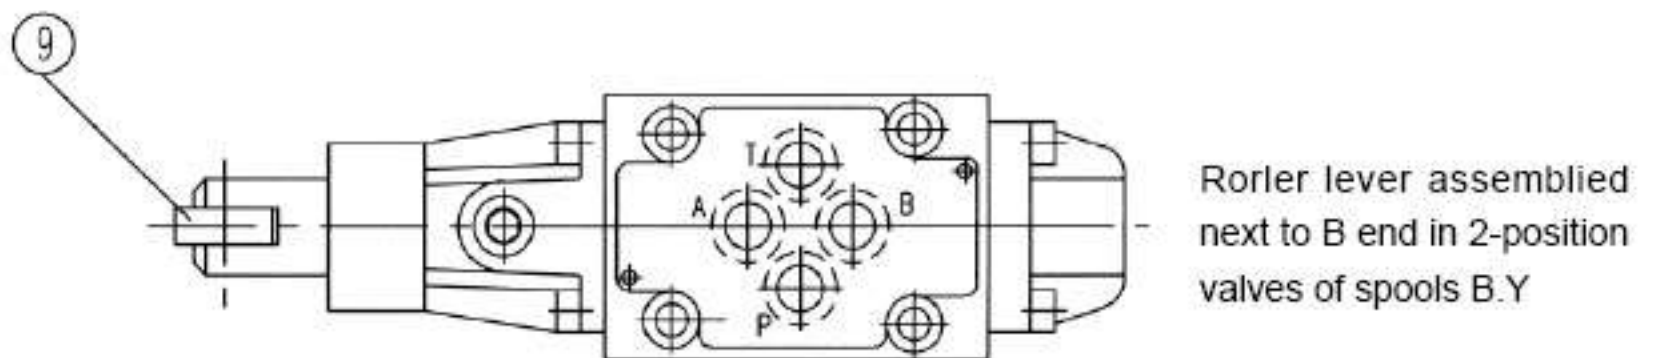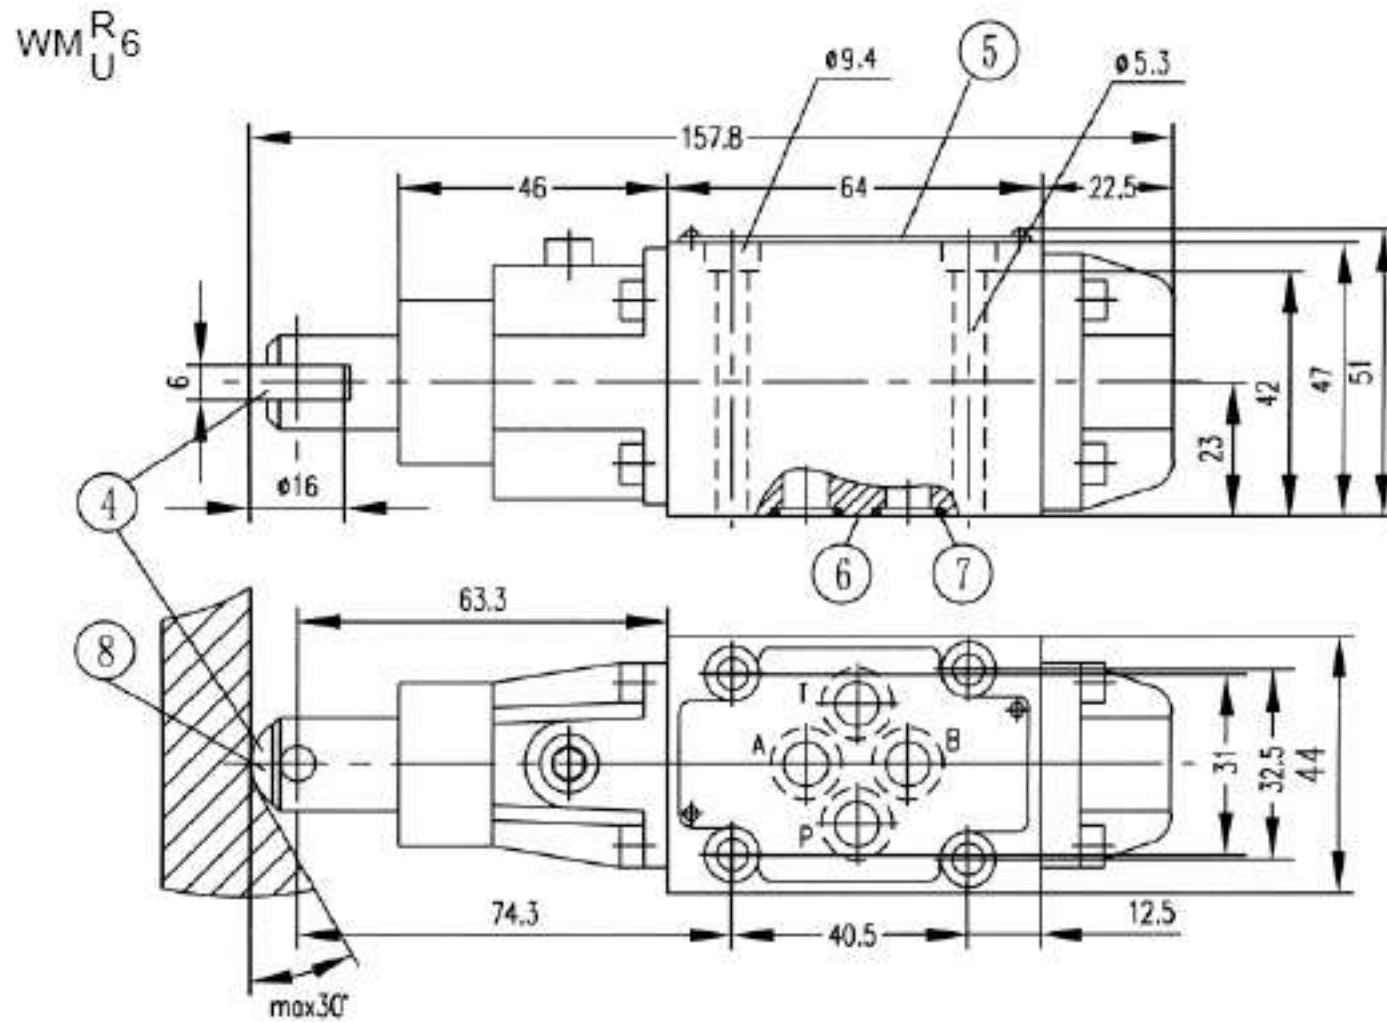

Subplates: see page 205

G341/01 (G1/4"); G341/02 (M14X1.5)

G342/01 (G3/8"); G342/02 (M18X1.5)



G502/01 (G1/2"); G502/02 (M22X1.5)

1. Spool position "a"
2. Spool position "o" and "a" (for 2-position valve)
3. Spool position "b"
4. Roller lever assembly may be stepped in 90°
5. Nameplate
6. Connection surface
7. O-ring 9.25X1.78 (for ports A, B, P, and T)
8. WMR, the code "R"
9. WMU, the code "U"

Unit dimensions

(Dimensions in mm)



WM $\begin{matrix} R \\ U \end{matrix}$ 10

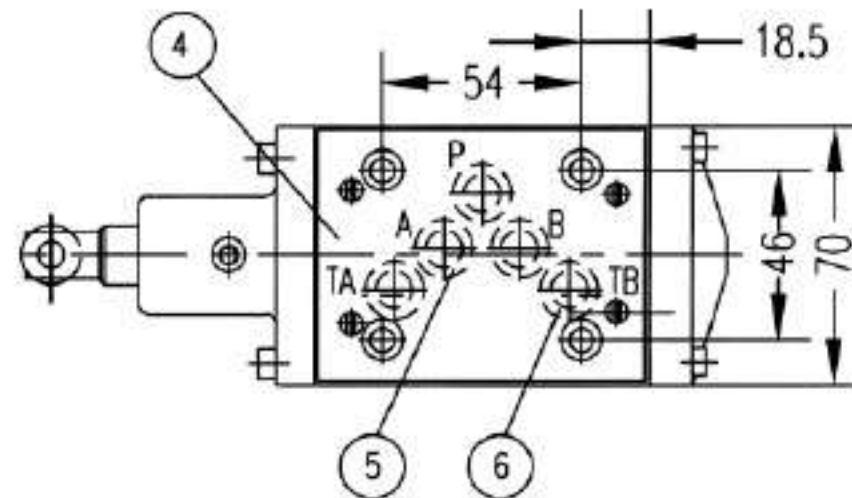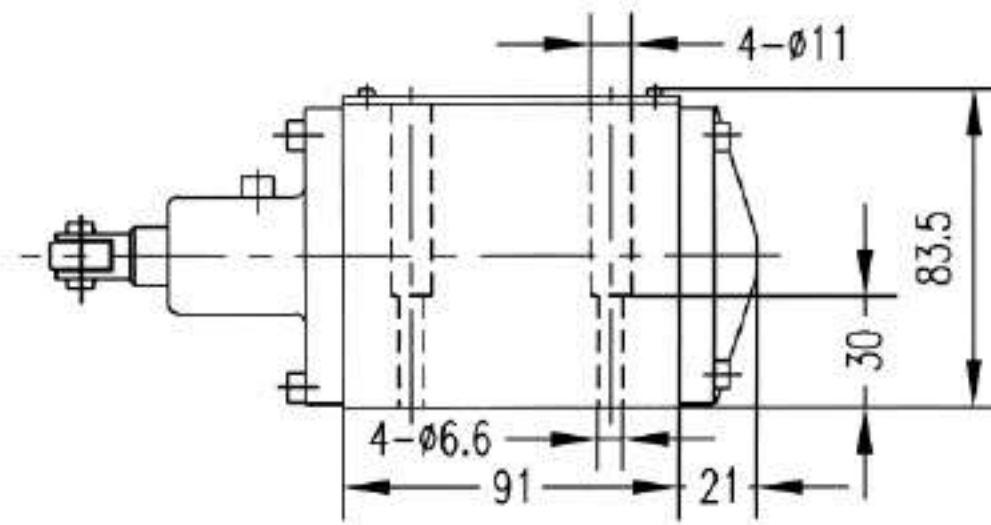


WMR

WMU

Roller lever assembled next to B end in 2-position valves of spools B.Y

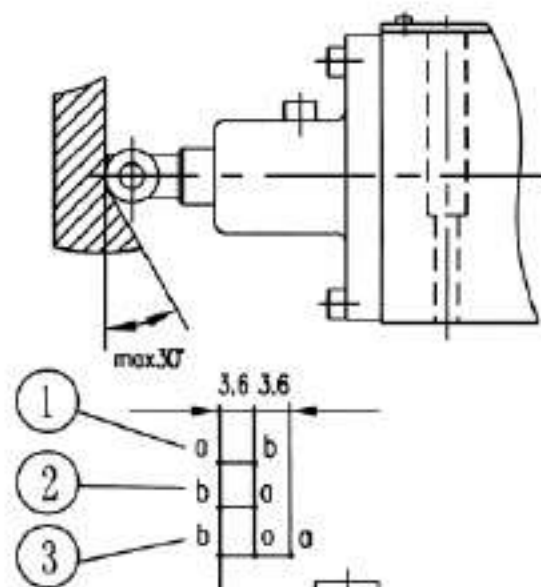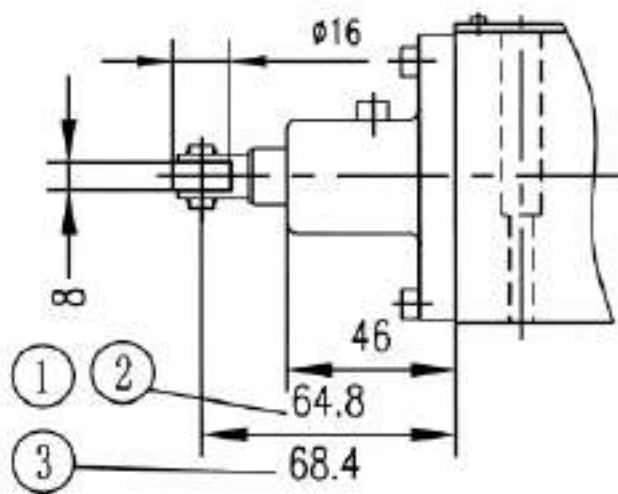

Required surface finish of mating piece

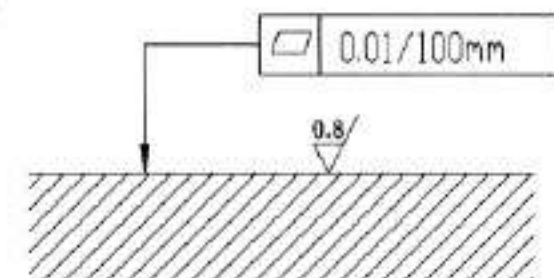

Subplates: see page 206

G66/01 (G3/8"); G66/02 (M18X1.5)

G67/01 (G1/2"); G67/02 (M22X1.5)

G534/01 (G3/4"); G534/02 (M27X2)

- 1, Two position valve (B, Y)
- 2, Two position valve (A, C, D)
- 3, Three position valve
- 4, Nameplate
- 5, O-ring12X2 (for ports A, B, P, and T)
- 6, Adjunctive port T can be connected with ZDR10D... in special condition

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves, electrically operated Type WE 4			RE23140/12.2004
	size 4	up to 21 MPa	up to 25 L/min	Replaces: RE23140/05.2001


Features:

- Directional valves of type WE4 are solenoid operated directional spool valves
- Wet pin solenoids of direct or alternating current
- Porting pattern to ISO 4401 and CETOP-RP 121H



Function,section

Type 4WE4E 10B/

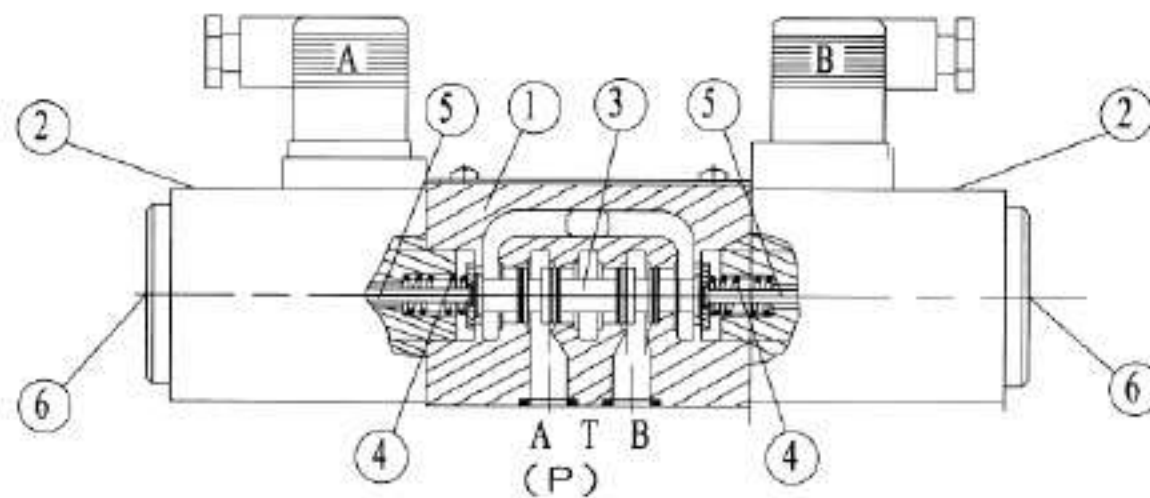

Directional valves of type WE4 are solenoid operated directional spool valves. They control the start, stop and direction of a fluid flow.

These directional valves basically consist of the housing (1), one or two solenoids (2), the control spool (3), and one or two return springs(4).

The control spool (3) is held by the return spring (4) in the central or in the initial position (except for detented spools). The control spool (3) is actuated via wet pin solenoids (2). In the energized condition. The force of the solenoid (2) acts via the plunger (5) on the control spool (3) and shifts the same from its rest position to the desired end position. Thus, the required flow pattern from P to A and B to T or P to B and A to T is selected. When the solenoid (2) is de-energized, the control spool (3) is returned to its neutral position by the return spring (4). A covered manual override is provided so that the control spool (3) can be operated without energizing the solenoid.

A

Type 4WE4 C 10B/O...

D

This version is a directional valve with 2 switching positions and 2 solenoids without detent and springs. There is no defined switching position in the de-energized condition.

A


Type 4WE4 C 10B/OF...

D

This version is a directional valve with 2 switching position, 2 solenoids and a detent. Thus, the relevant switching positions are fixed and continuous energization of the solenoid is not necessary

Throttle inserts

The use of throttle inserts is only required, if, due to the operating conditions, flows are to be expected, which are higher than the stated maximum performance limits of the valve. It is inserted in the P channel of the directional valve.




Type 4WE 4-10B/...B..
O-ring 7 x 1.5

Technical data

Hydraulic technical data			
Max. operating pressure - Ports A, B, P	(MPa)	up to 21.0	
- Port T	(MPa)	10.0 ,With symbols A or B port T must be used as leakage port when the operating pressure is above the permissible tank pressure	
Max. flow	(L/min)	up to 25	
Pressure fluid		Mineral oil phosphate ester	
Viscosity range	(mm ² /s)	2.8 to 500	
Pressure fluid temperature range	(°C)	- 30 to + 80	
Degree of contamination	(µm)	Maximum permissible degree of contamination of the hydraulic fluid to NAS 1638 class 9. We therefore recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.	
Weight	(Kg)	- Valve with 1 solenoid 0.9 - Valve with 2 solenoids 1.3	
Electrical technical data			
Available voltages	(V)	12, 24, 220, 110R, 220R	
Power consumption	(W)	22	
Duty		continuous	
Switching time	ON	(ms)	20 to 30
	OFF	(ms)	10 to 20
Max. ambient temperature	(°C)	+50	
Max. coil temperature	(°C)	+150	
Protection to DIN 40 050		IP65	
Switching frequency	(cycles/h)	15000	

With electric connection the protective conductor (PE) must be connected according to the relevant regulations.

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ °C}$)

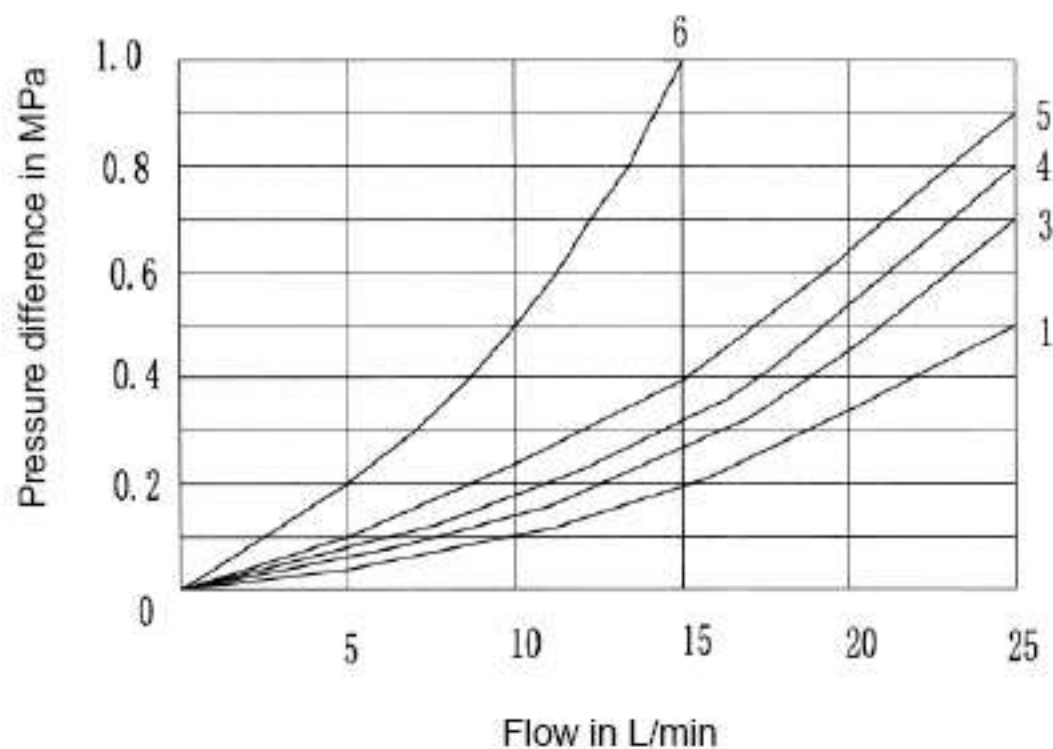

Symbol	Flow direction				
	P → A	P → B	A → T	B → T	P → T
A	5	5	-	-	-
B	5	5	-	-	-
D,Y	5	5	4	4	-
E	4	4	3	3	-
G	3	3	4	4	6
H	1	1	1	1	-
J	5	5	3	3	-

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves, electrically operated Type WE 5			RE 23166/12.2004
	Size5	up to 25 MPa	up to 14L/min	Replaces: RE23166/05.2001

Features:

- Direct solenoid actuated directional spool valve
- Wet pin DC or AC solenoids



Function, section

Directional valves of type WE5 are solenoid operated directional spool valves. They control the start, stop and direction of a fluid flow.

These directional valves basically consist of the housing (1), one or two solenoids (2), the control spool (3), and one or two return springs(4).


The control spool (3) is held by the return spring (4) in the central or in the initial position (except for detented spools).The control spool (3) is actuated via wet pin solenoids (2). In the energized condition.The force of the solenoid (2) acts via the plunger (5) on the control spool (3) and shifts the same from its rest position to the desired end position.Thus, the required flow pattern from P to A and B to T or P to B and A to T is selected. When the solenoid (2) is de-energized, the control spool (3) is returned to its neutral position by the return spring (4).A covered manual override is provided so that the control spool (3)can be operated without energizing the solenoid.

Type 4WE5 N 6.0B/O...

This version is a directional valve with 2 switching positions and 2 solenoids without detent and springs. There is no defined switching position in the de-energized condition.

Type 4WE5 N 6.0B/OF...

This version is a directional valve with 2 switching position,2 solenoids and a detent.Thus, the relevant switching positions are fixed and continuous energization of the solenoid is not necessary

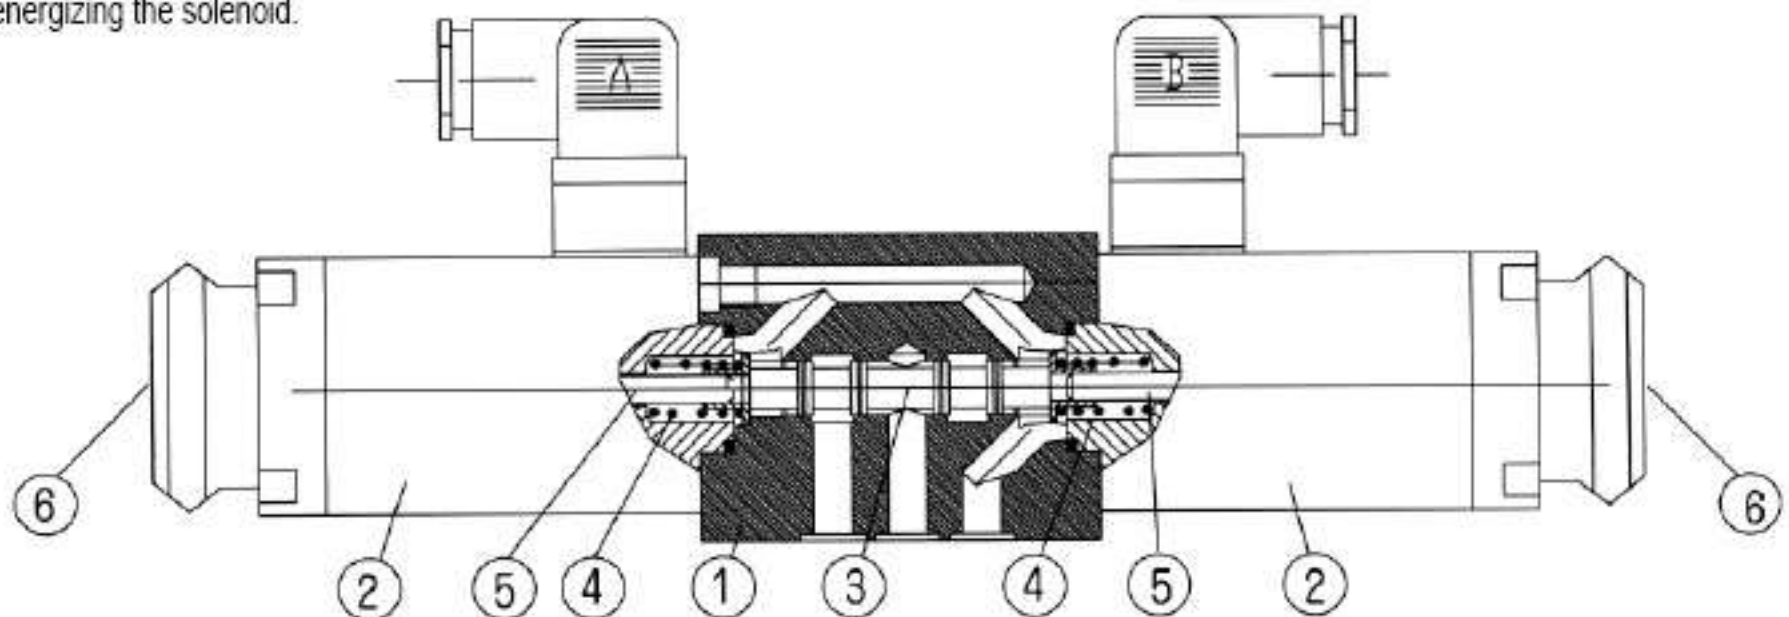


Type WE5

Ordering details

WE 5 6.0 B / A *

3 Service ports = 3
4 Service ports = 4

Nominal size 5 = 5

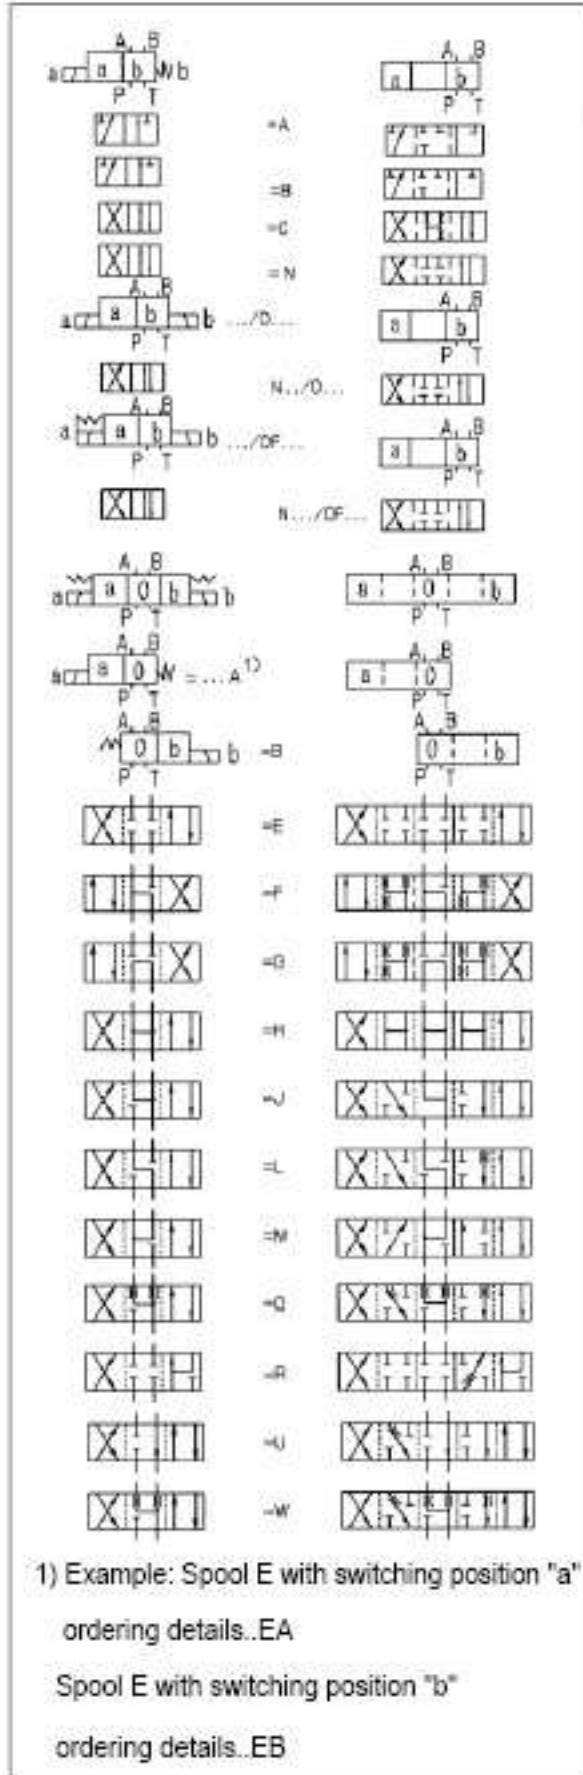

Series 6.0 to 6.9 = 6.0
(6.0 to 6.9: unchanged installation and connection dimensions)

Further details in cleartext

No code = mineral oils
V = phosphate ester

Z4 = normal plug
Z5 = large right-angle plug
Z5L= large right-angle plug with indicator

N= With manual override
No = Without manual override

W220-50= 220 V AC 50 Hz
G24= 24 V DC
W220R = DC solenoid commuting automatically

A= wet pin solenoid

No= Standard,with spring return
OF= Without spring return, with detent
O = Without spring return

B = Technology of Beijing Huade Hydraulic

* With spool types A and B port T must be used as a drain port when operating pressure exceeds 6 MPa

Technical data

Hydraulic			
Hydraulic fluid	mineral oils or phosphate ester		
Fluid temperature range (°C)	-30 -- +80		
Viscosity range (mm ² /s)	2.8 -- 500		
Operating pressure, max. (MPa)	Port A, B, P	Port T	
	up to 25	up to 6	
Flow area (switching position D):	With symbol W	With symbol Q	
	approx. 3% of nominal cross section	approx. 6% of nominal cross section	
Weight (kg)	valve	subplate G115/01	subplate G96/01
	approx. 1.4	approx. 0.7	approx. 0.5
Electrical			
AC Voltage (V)	110, 220, in 50Hz		
DC Voltage (V)	12, 24, 110		
Voltage type	AC	DC	
Power requirement (W)	26		
Holding power (VA)	-	46	
Switch-on power (VA)	-	130	
Duty cycle	continue		
Switching time	ON (ms)	40	25
	OFF (ms)	30	20
Environment temperature (°C)	+50		
Coil temperature (°C)	+150		
Switching frequency cycles (cycles/h)	15000	7200	
Type of protection to DIN 40 050	IP65		


Performance limits

Attention!

The given operating limits are valid for the use with two flow directions (e.g. from P to A and simultaneous return flow from B to T). Due to the flow forces active inside the valves the permissible operating limit may be significantly lower if only one flow direction from P to A and closed port B) is used! The operating limits were measured with solenoids at operating temperature, 10% under voltage and without tank back pressure.

symbol	flow in L/min	operating pressure in MPa		
		5	10	25
A, B, C, N, E, F, H, J, L, M, Q, R, V, W		14	14	12
G		10	10	9

The connection dimensions of service ports

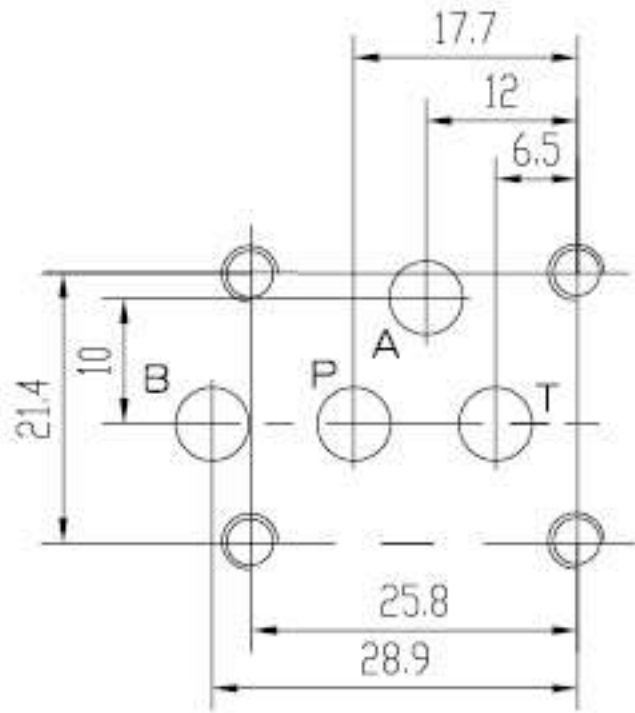

O-ring	7X1.5
Valve fixing screws	4-M5X50-10.9 (GB/T70.1-2000) $M_A=9N.m$

Subplates:

G115/01; G96/01



G115/02; G96/02

see page 212



Dimensions of the electrical connection

(Dimension in mm)



Z4 normal plug to DIN43850

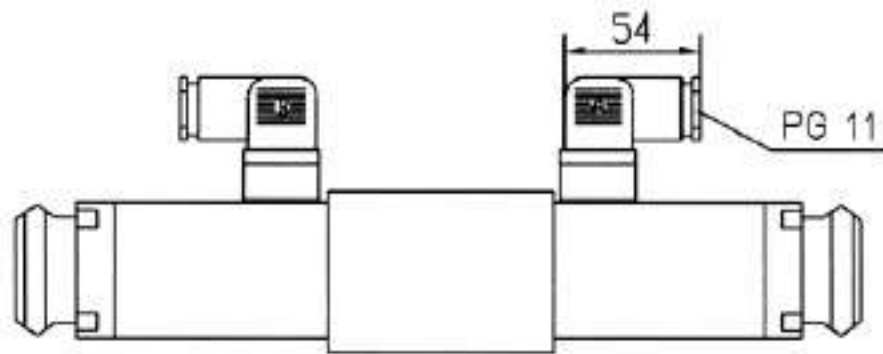

Z5 large right-angle plug

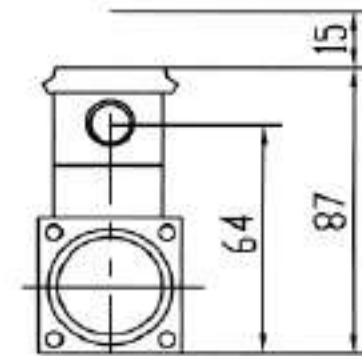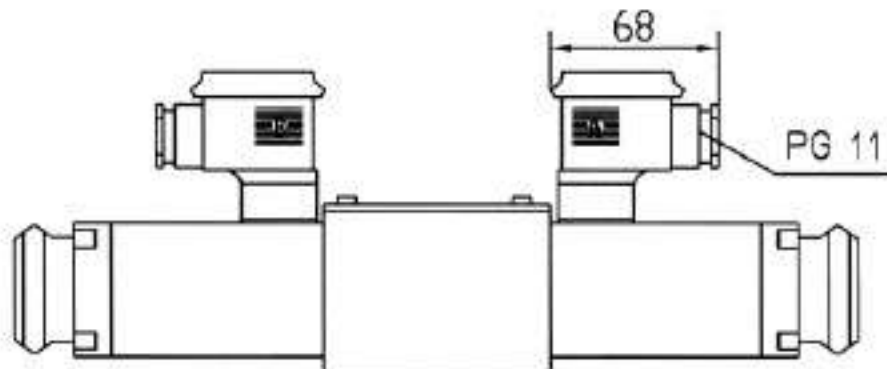

Z5L large right-angle plug with indicator light

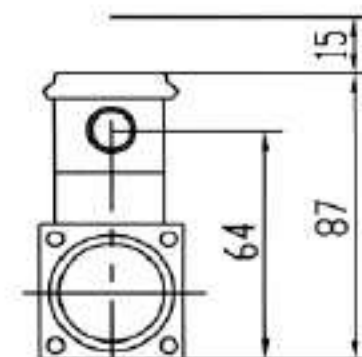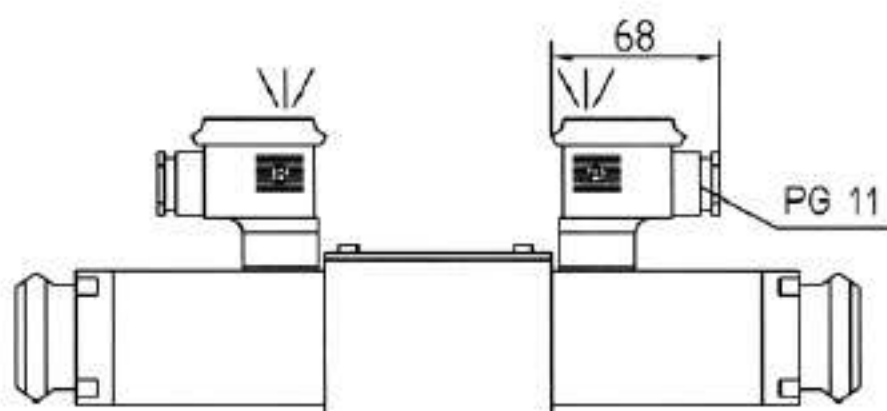


Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves, electrically operated Type WE 6...50B/...			RE 23177/12.2004
	Size 6	up to 31.5 MPa	up to 80L/min	Replaces; RE23177/05.2001

Features:

- Direct operated directional spool valve with solenoid operation in standard design
- Wet pin DC or AC solenoids
- high-power solenoid
- 53 kinds spool function
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H

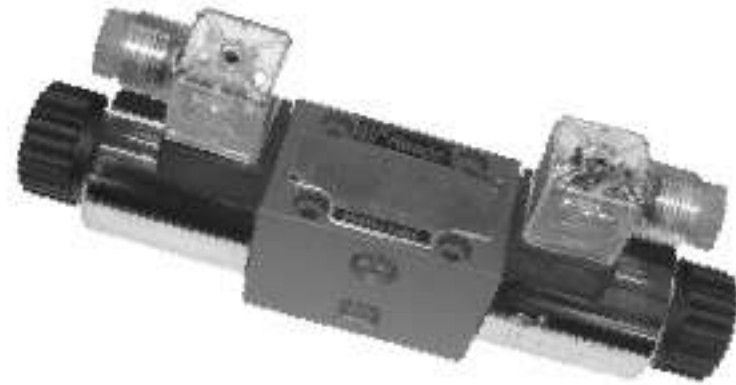

Functional, section

Directional valves of type WE6 are solenoid operated directional spool valves. They control the start, stop and direction of a fluid flow.


These directional valves basically consist of the housing (1), one or two solenoids (2), the control spool (3), and one or two return springs (4).

In the de-energized condition, the control spool (3) is held by the return springs (4) in the central or in the initial position (except for detented spools). The control spool (3) is actuated via wet pin solenoids(2). The force of the solenoid (2) acts via the plunger (5)

on the control spool (3) and shifts the same from its rest position to the desired end position. Thus, the required flow pattern from P to A and B to T or P to B and A to T is selected.

When the solenoid (2) is de-energized, the control spool (3) is returned to its neutral position by the return spring (4).


A manual override (6), optional, is provided for emergency operation of the control spool (3) without energization of the solenoid.

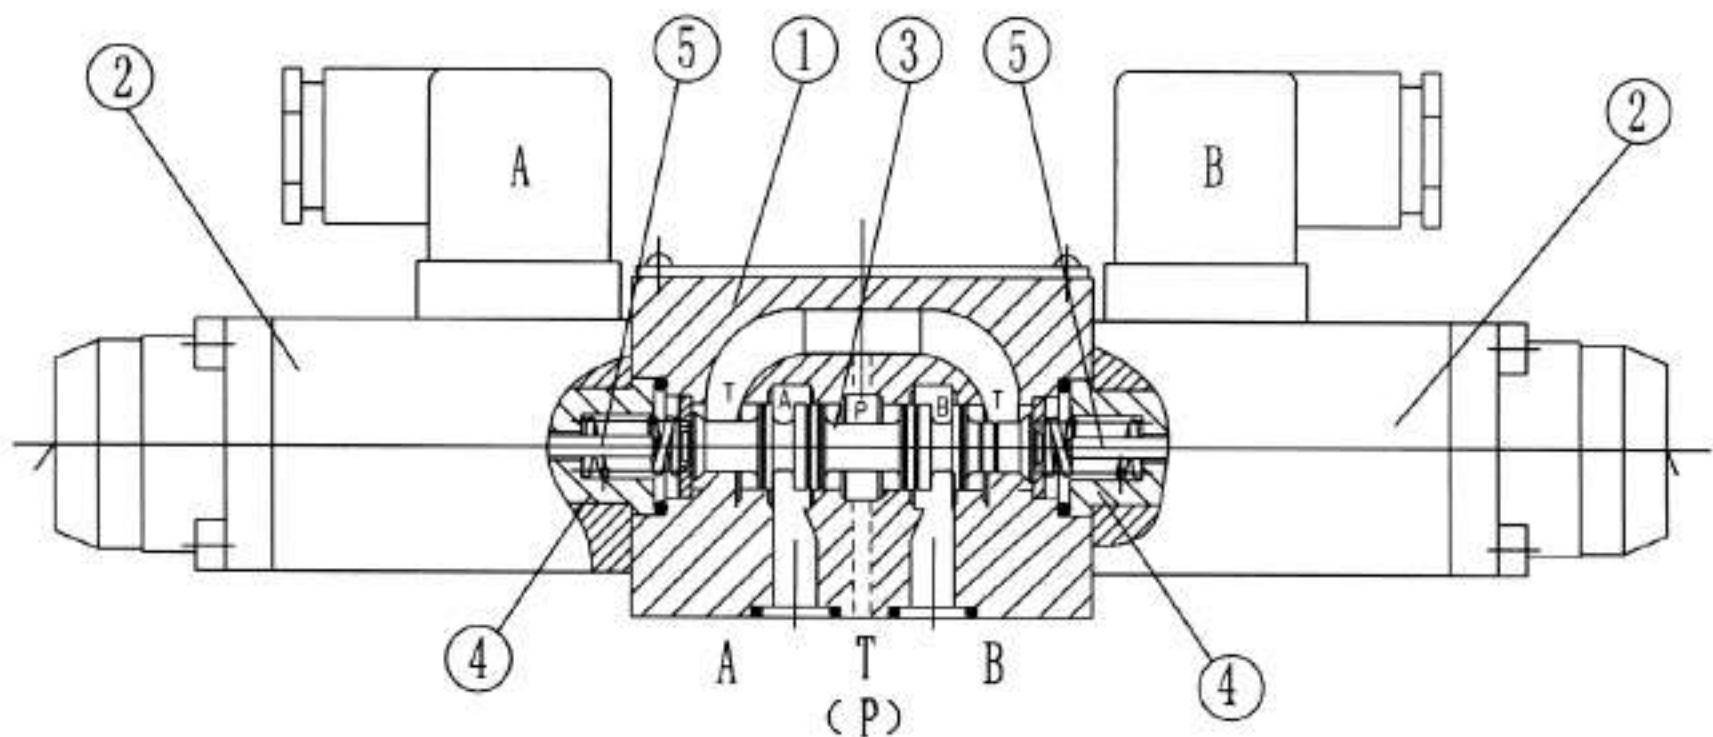

Type 4WE6...50B/...

4WE6--- 50B/O,


This version is a directional valve with 2 switching positions and 2 solenoids without detent. There is no defined switching position in the de-energized condition.

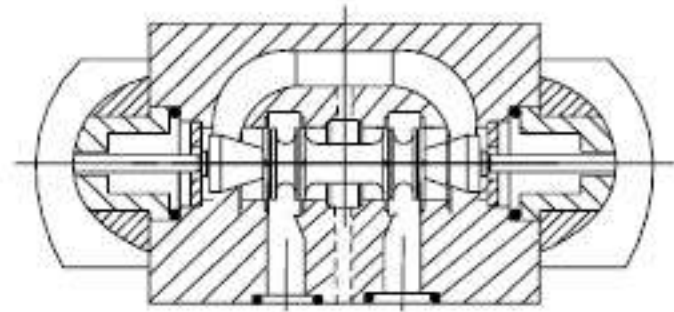

WE6---50B/O

WE6--- 50B/OF,


This version is a directional valve with 2 switching position, 2 solenoids and a detent. Thus, the relevant switching positions are fixed and continuous energization of the solenoid is not necessary.

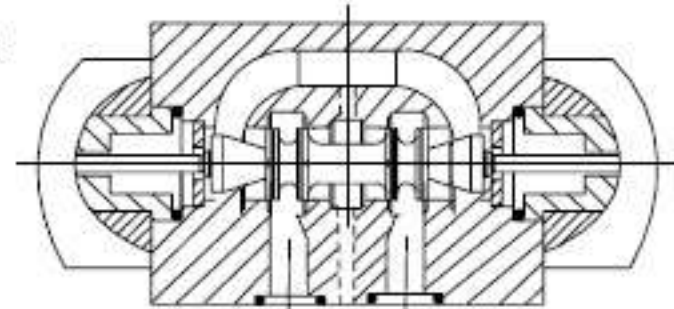

WE6---50B/OF

Throttle inserts:

The use of throttle inserts is only required, if, due to the operating conditions, flows are to be expected, which are higher than the stated maximum performance limits of the valve. It is inserted in the P channel of the directional valve.

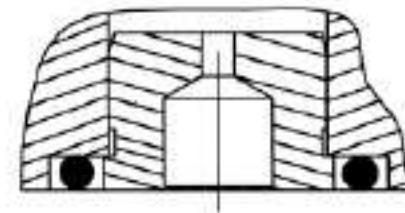

Solenoid


Wet pin solenoid life is much longer because gag bit moves in the oil just lessening hydraulic impact and abrasion, improving the speed of emanating heat.

The characteristics of DC solenoids:


- Switching gently, high frequency.
 - Coils are all safety wherever gag bit stays at any position of the solenoid.
 - Its response is not rapid for lower voltage, go beyond voltage instantly, over loading or jamming of mechanism.
- AC power supply can be used through commuting.

The characteristic of AC solenoids:

- The circuit of electrical control is easy.
- Action time is short.
- It is not necessary of special protect device for on-off.

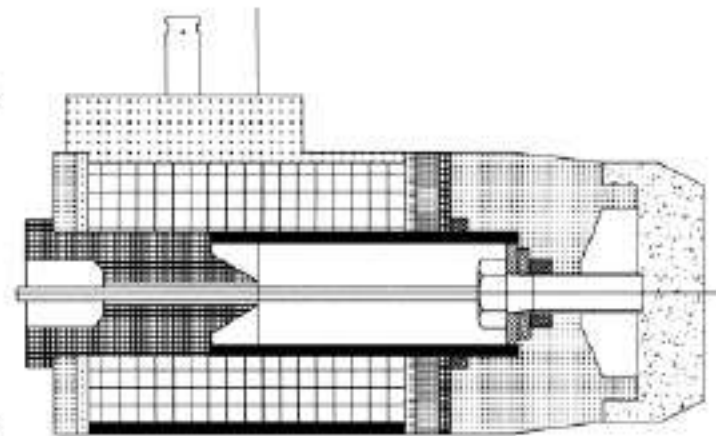

DC solenoid

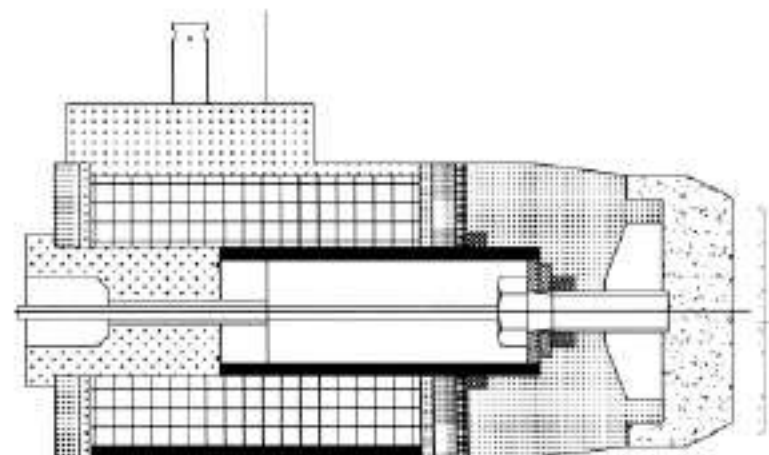

AC solenoid

Ordering details

WE 6 50 B /

3 Service ports = 3
4 Service ports = 4

Nominal size 6 =6

Further details in clear text

No code = mineral oils
V = phosphate ester

No code = without throttle insert
B08 = Throttle, ϕ 0.8 mm
B10 = Throttle, ϕ 1.0 mm
B12 = Throttle, ϕ 1.2 mm

Electrical connection see the follow page

N = With manual override
No code = Without manual override




W220 -50 = 220 V AC, 50 Hz
G24 = 24 V DC
W220R = AC 110V 220V
W110R = AC solenoid with plug Z5

A = standard solenoid
B = high-power solenoid

No code = With spring return
OF = Without spring return, with detent
O = Without spring return

B = Technology of Beijing Huade Hydraulic

50 = Series 50 to 59
(50 to 59: unchanged installation and connection dimensions)

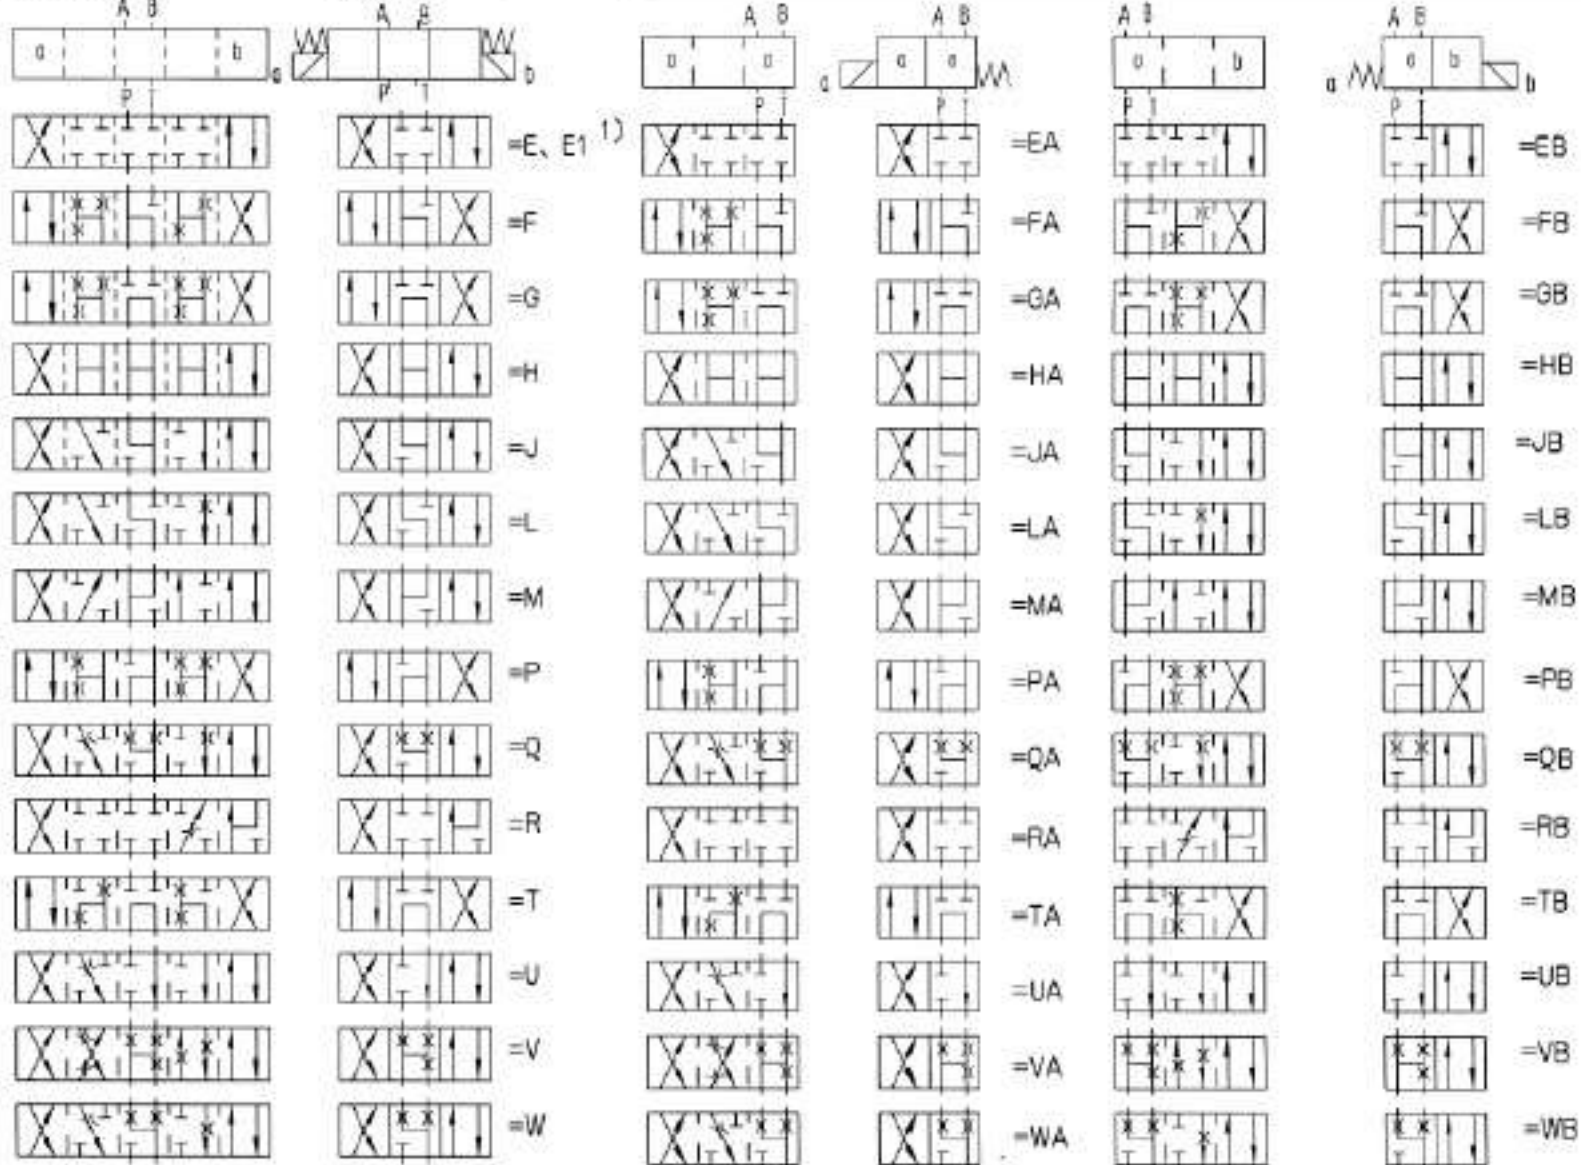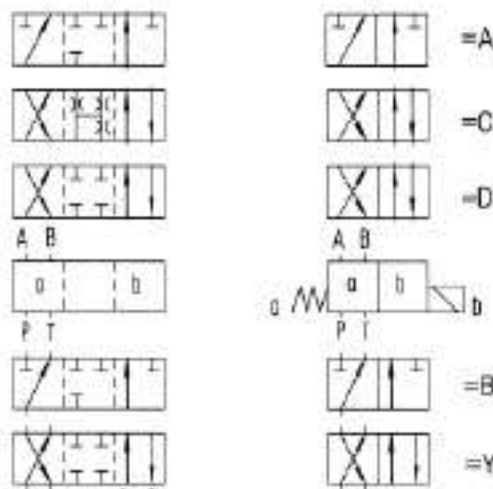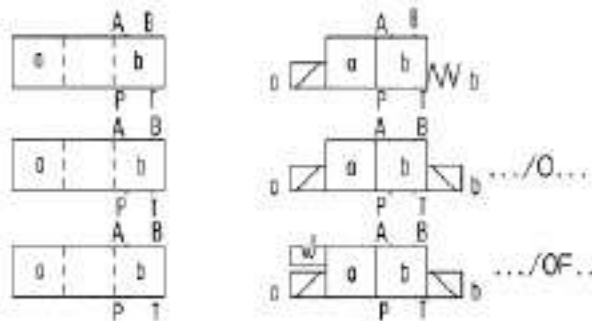

Technical data

Hydraulic

Solenoid		Standard solenoid A	High-power solenoid B
Operating press., max.	Port A, B, P (MPa)	up to 31.5	up to 35
	Port T (MPa)	up to 16 (=) up to 10 (~)	up to 16
Flow, max. q_v (L/min)		up to 60	up to 80 (=); up to 60 (~)
Flow area (switching position 0):		for symbol Q, 6% of nominal cross section for symbol W, 3% of nominal cross section	
Hydraulic fluid		mineral oils or phosphate ester	
Fluid temperature range (°C)		- 30 to + 80	
Viscosity range (mm ² /s)		2.8 to 500	
Weight (Kg)	Valve with 1 solenoid	1.2	1.35
	Valve with 2 solenoids	1.6	1.6

With symbol A and B, port T must be used as drain port, if the operating pressure is higher than the permissible tank pressure.

Electrical

Solenoid		Standard solenoid A		High-power solenoid B	
		–	~	–	~
Available voltages (V)		12, 24, 110	110, 220/50Hz	12, 24, 110	110, 220/50Hz
Power requirement (W)		26	–	30	–
Holding power (VA)		–	46	–	35
Switch-on (VA)		–	130	–	220
Duty cycle		continuous	continuous	continuous	continuous
Switching time	ON (ms)	20–45	10–25	20–45	10–20
	OFF (ms)	10–25	10–25	10–25	15–40
Environment temperature (°C)		+ 50			
Coil temperature (°C)		+ 150			
Switching frequency (cycles/h)		15000	7200	15000	7200
Type of protection to		DIN 40 050		IP65	

When connecting the electrics, the protective conductor (PE) must be connected according to relevant regulations.





Switching limits

The switching limits are valid for use with two directions of flow (e.g. from P to A with simultaneous return flow from B to T). Due to the flow forces within the valve, the permissible switching capacity limits can be much lower with only one direction of flow (e.g. from P to A, and port B blocked)!

Switching limits of the solenoid type A

DC solenoid				AC solenoid (50Hz)			
Char. curve	Symbol	Char. curve	Symbol	Char. curve	Symbol	Char. curve	Symbol
1	A,B***	7	G	14	A,B***	22	H
2	A,B	8	H	15	A,B	23	J,L,Q,U,W
3	C,D,Y	9	J,L,Q,U,W	16	C,D,Y	24	M
4	E	10	R**	17	E	25	R**
5	M,C/O,E1	11	V	18	E1	26	V
	D/O,C/O,F,D/O,F	12	A/O,A/O,F	19	C/O,D/O	27	A
6	F,P	13	T	20	F,P	28	T
				21	G		



Return flow from the actuator to the tank-T; *Without manual override

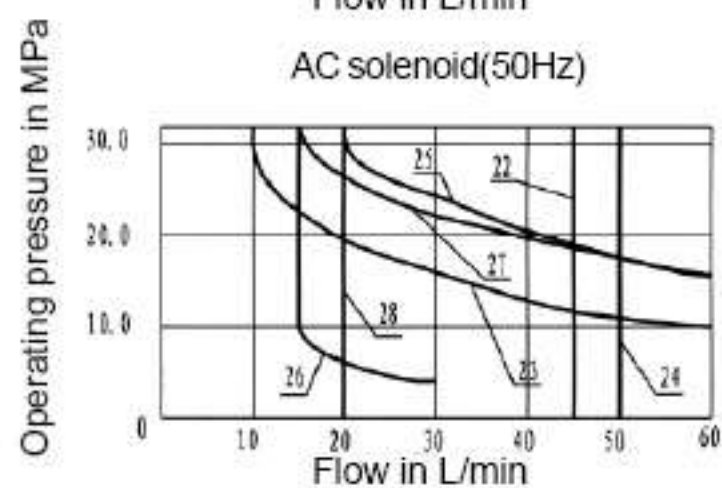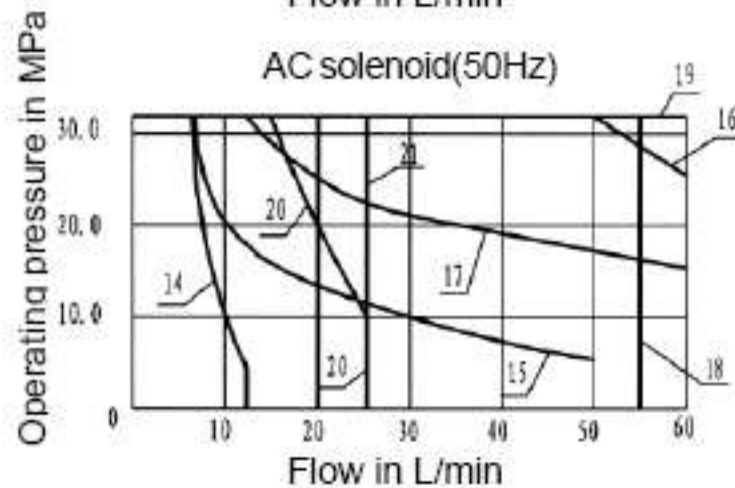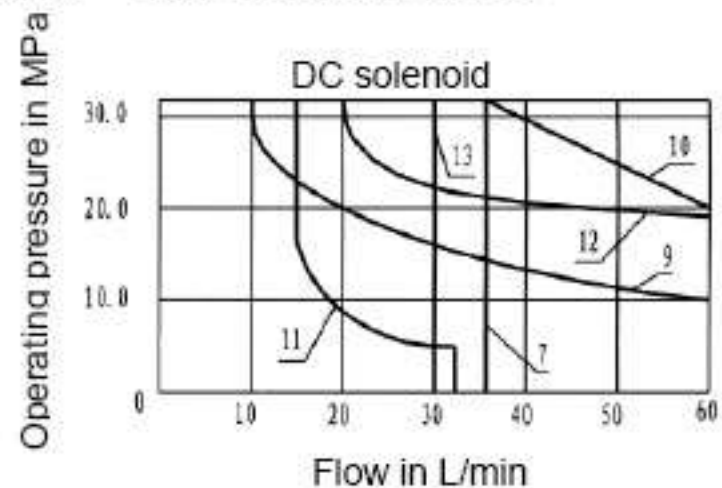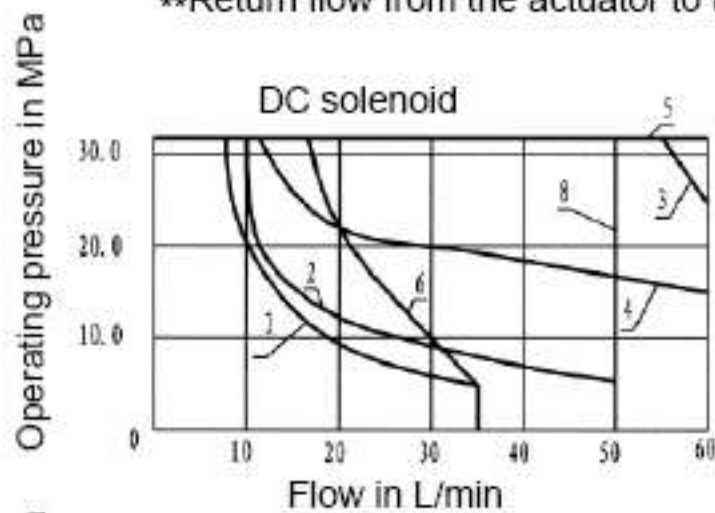

Switching limits of the solenoid type B


DC solenoid		AC solenoid (50Hz)	
Char. curve	Symbol	Char. curve	Symbol
42	A,B***	52	A,B***
43	V	53	V
44	A,B	54	A,B
45	F,P	55	F,P
46	J,L,U	56	G,T
47	G,H,T	57	H
48	A/O,A/O,F,Q,W	58	A/O,D/O,F,C/O,C/O,F
49	G,D,Y		D/O,D/O,F,E,J,L,E1
50	M		M,Q,R**,U,W
51	E,R**,C/D,C/O,F,E1	59	C,D,Y
	D/O,D/O,F		

Return flow from the actuator to the tank-T; *Without manual override

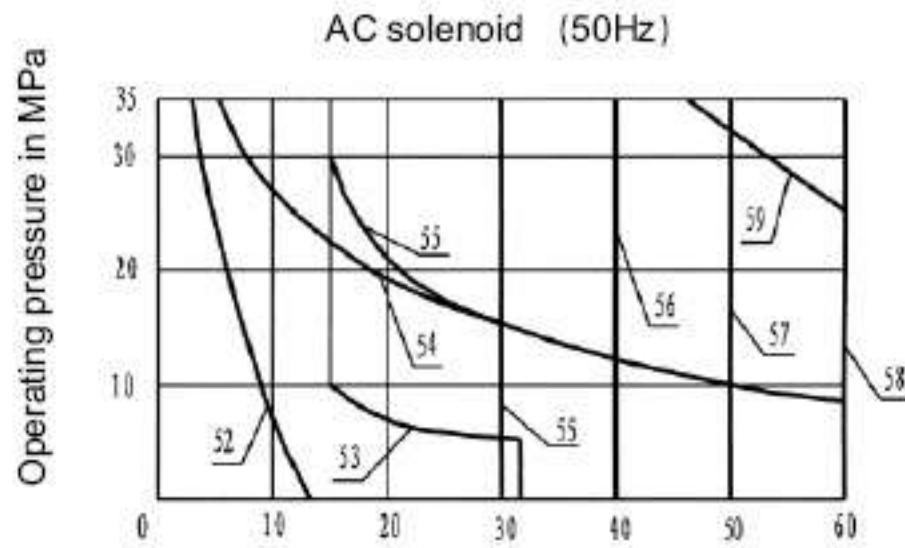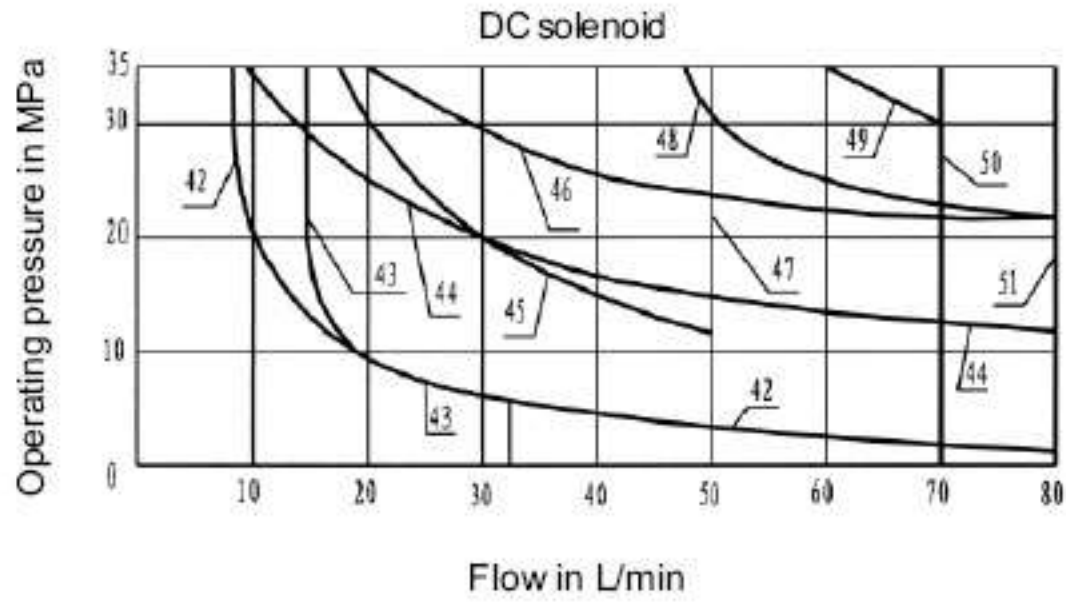

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)


7 Symbol "R" in switching position A → B
 8 Symbol "G" and "T" in central position P → T

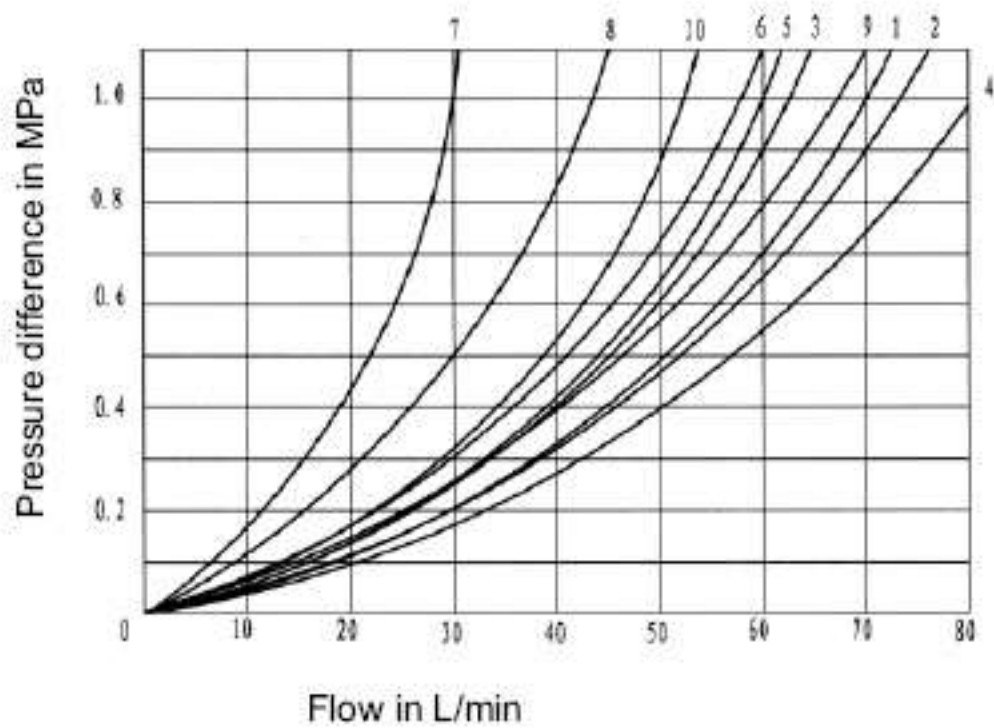



Symbol	Direction of flow			
	P → A	P → B	A → T	B → T
A,B	3	3	-	-
C	1	1	3	1
D,Y	5	5	3	3
E	3	3	1	1
F	1	3	1	1
T	10	10	9	9
H	2	4	2	2
J,Q	1	1	2	1
L	3	3	4	9
M	2	4	3	3
P	3	1	1	1
R	5	5	4	-
V	1	2	1	1
W	1	1	2	2
U	3	3	9	4
G	6	6	9	9

Unit dimensions

(Dimensions in mm)

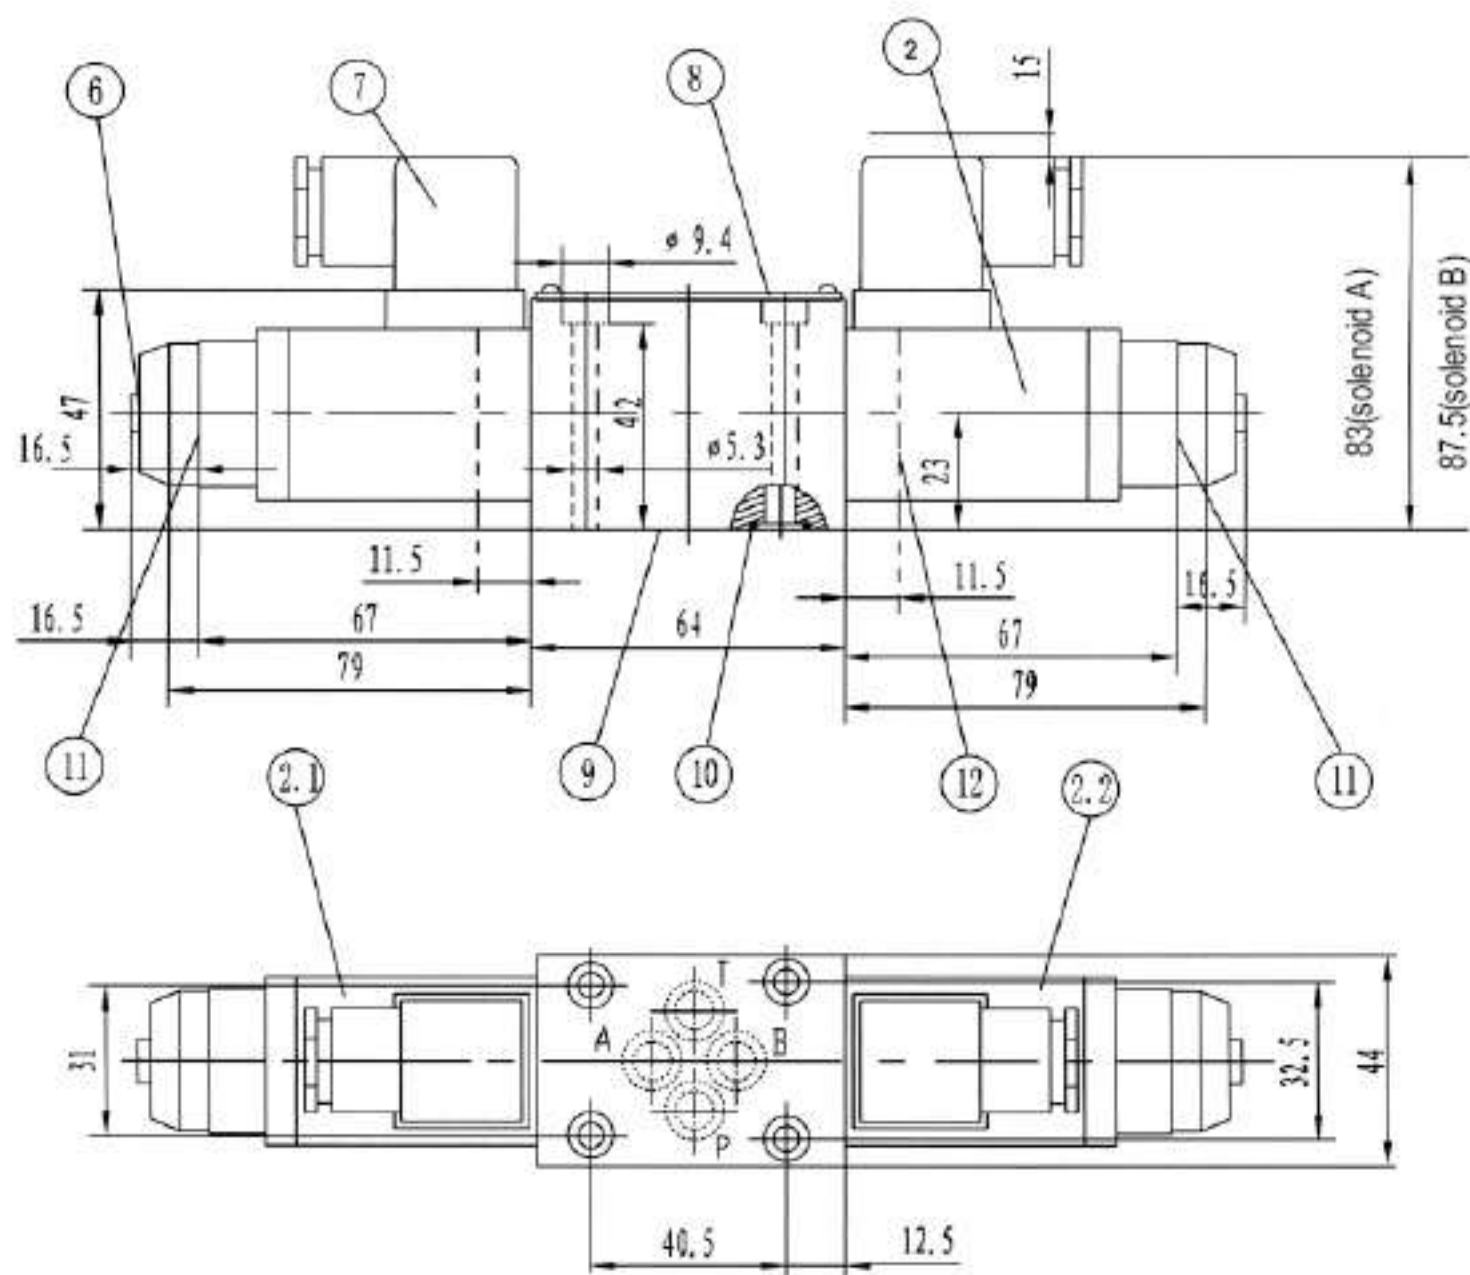

The connection dimensions of service ports

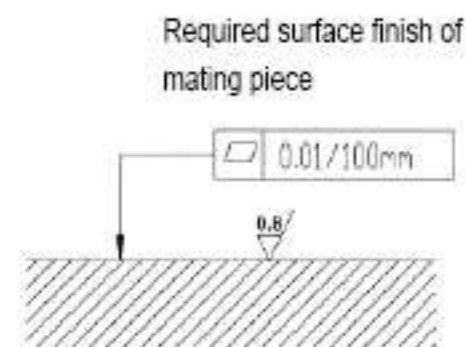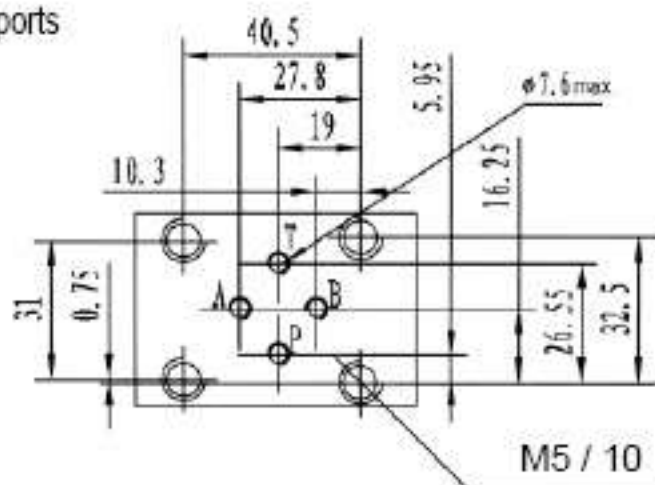


- 1.1 Solenoid "a" (colour of the plug-in connector: grey)
- 1.2 Solenoid "b" (colour of the plug-in connector: black)
- 2 Manual override "N"
- 7 Plug Z4
- 8 Nameplate
- 9 Service port
- 10 O-ring 9.25x1.78
- 11 Solenoid without manual override
- 12 Cover for valve with one solenoid


Valve fixing screws
4-M5x50-10.9 (GB/T70.1-2000)
 $M_A=9N.m$

Subplates:
G341/01(G1/4 ") G341/02(M14x1.5)
G342/01(G3/8 ") G342/02(M18x1.5)
G502/01(G1/2 ") G502/02(M22x1.5)
see page 205


Z4 Individual connections

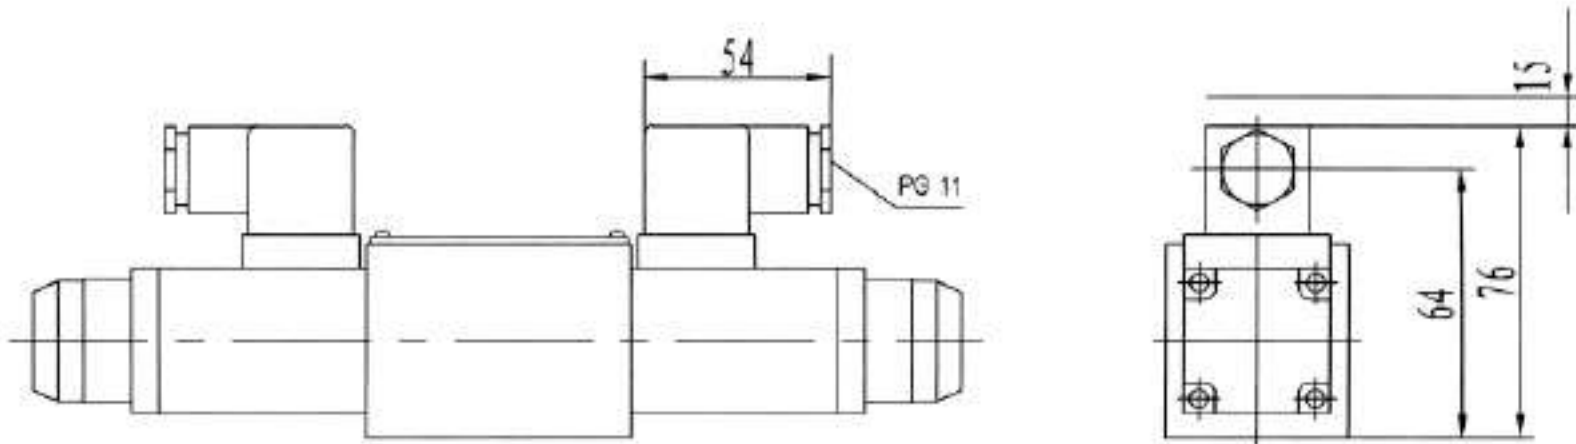

Z5 large right-angle plug(rectifier can be selected)

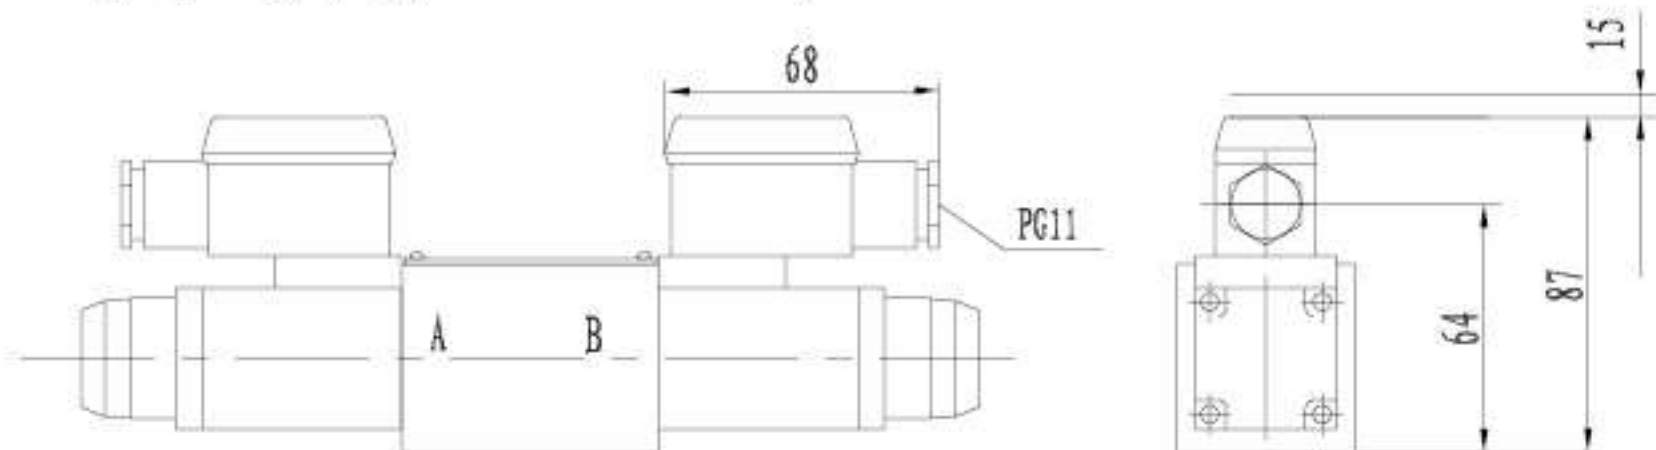

Z5L large right-angle plug with indicator light

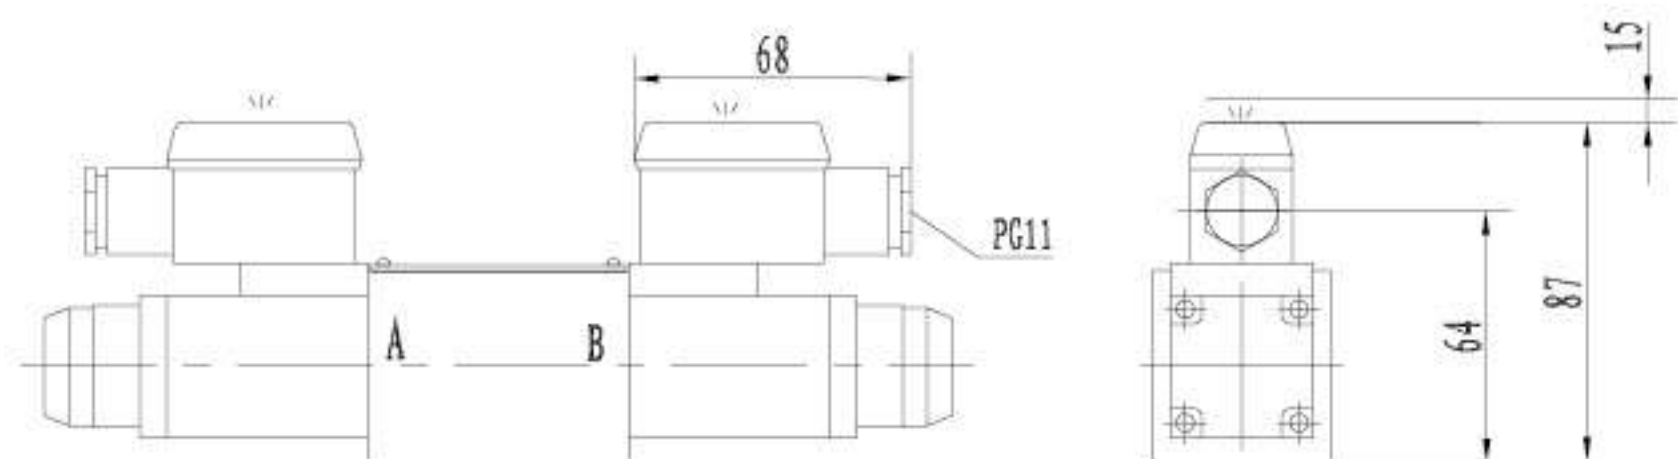


BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves Type WE 6...61B/... (new series)			RE 23188/12.2004
	Size 6	up to 31.5 MPa	up to 80L/min	Replaces: 23188/05.2001 RE: 23316/05.2001

Features:

- Direct solenoid actuated directional spool valve high performance version
- Wet pin DC or AC solenoids with removable coil
- Solenoid coil can be rotated through 90 °
- It is not necessary to open the pressure tight chamber when changing the coil
- Electrical connections either as individual or central connections
- Hand override, optional
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Function, section

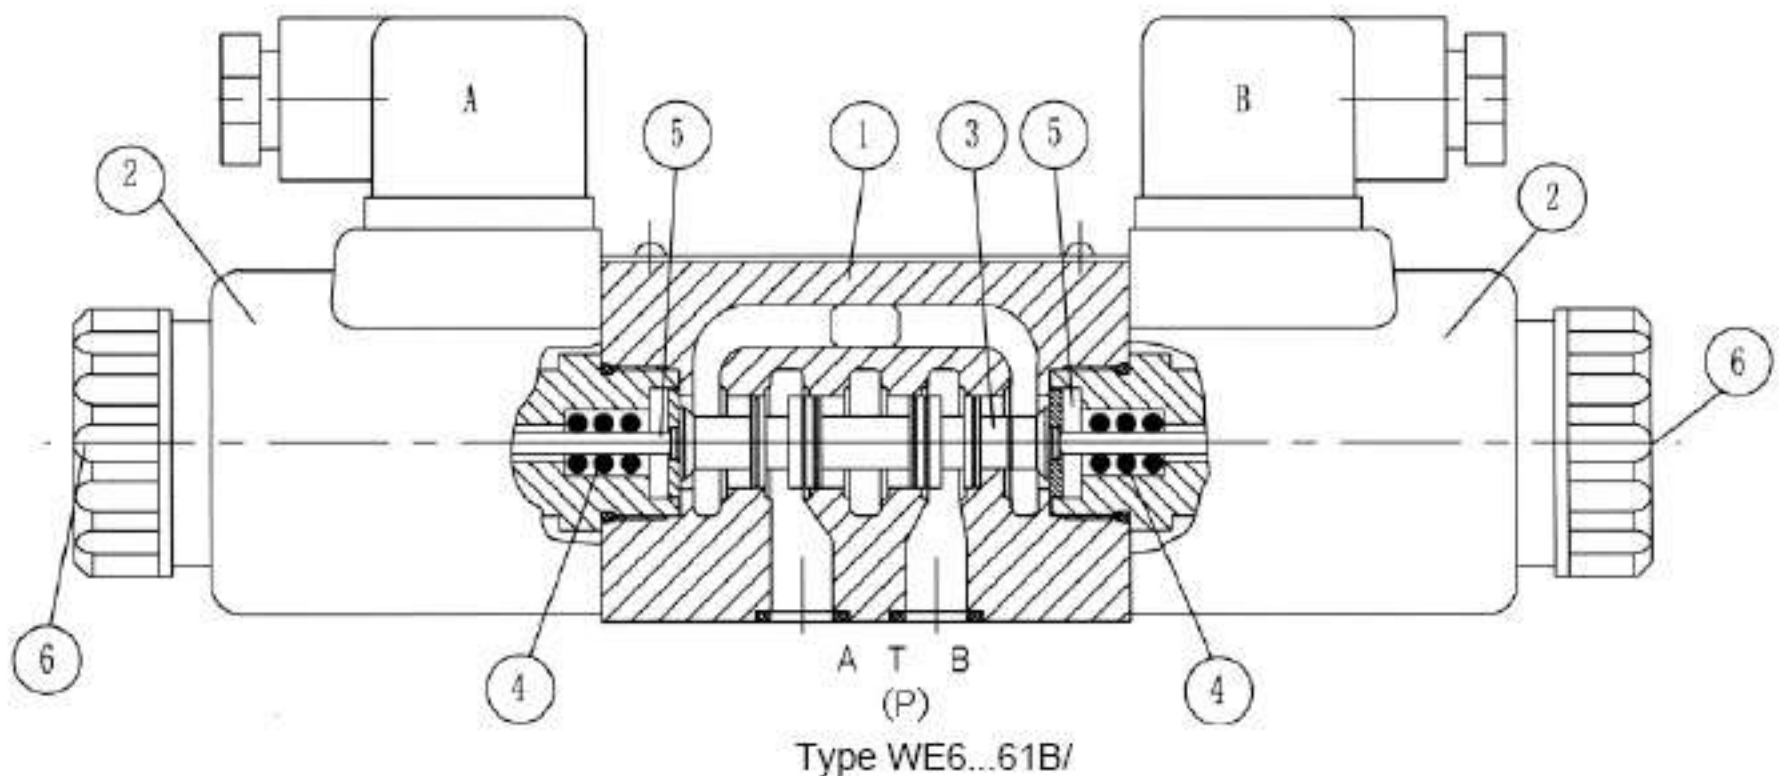

Essentially the directional control valves consist of housing (1), one or two solenoids (2), the control spool (3), and one or two return springs (4)

In the de-energized condition the control spool (3) is held in the neutral or initial position by means of return springs (4) (except for impulse spools). The control spool (3) is actuated via wet pin solenoids (2)

The force of the solenoids (2) acts via the plunger (5) on the control spool (3) and pushes this from its neutral position to the required end position. This gives free-flow

from P to A and B to T or P to B and A to T.


When solenoid (2) is de-energized, the control spool (3) is returned to its neutral position by means of the return springs (4).

An optional hand override (6), allows movement of the control spool (3) without energising the solenoid.

Ordering details.

		WE	6	61	B /	E			*
3 service ports = 3									
4 service ports = 4									
Nominal size 6 = 6									
Symbols see below									
Series 60 to 69 = 61 (60 to 69: unchanged installation and connection dimensions)									
Technology of Beijing Huade Hydraulic = B									
Spring return = No code									
Without spring return = O									
Without spring return with detent = OF									
High power solenoid = E									
Wet pin (oil immersed) with removable coil									
12 V DC = G12									
220 V AC 50 Hz = W220-50									
24 V DC = G24									
DC solenoid commuting automatically = W220R									
		Further details in clear text							
		No code = mineral oils							
		V = phosphate ester							
		No code = Without cartridge throttle							
		B08 = Throttle ϕ 0.8 mm							
		B10 = Throttle ϕ 1.0 mm							
		B12 = Throttle ϕ 1.2 mm							
		Individual connections:							
		K4 = With sealing cover, without plug							
		Z4 = normal plug							
		Z5L = Large right-angle plug with indicator							
		Central connections:							
		DKL = Central connection on cover with indicator light (without angled plug-in connector)							
		N9 = With protected hand override (standard)							
		N = With hand override							
		No code = Without hand override							

Symbols

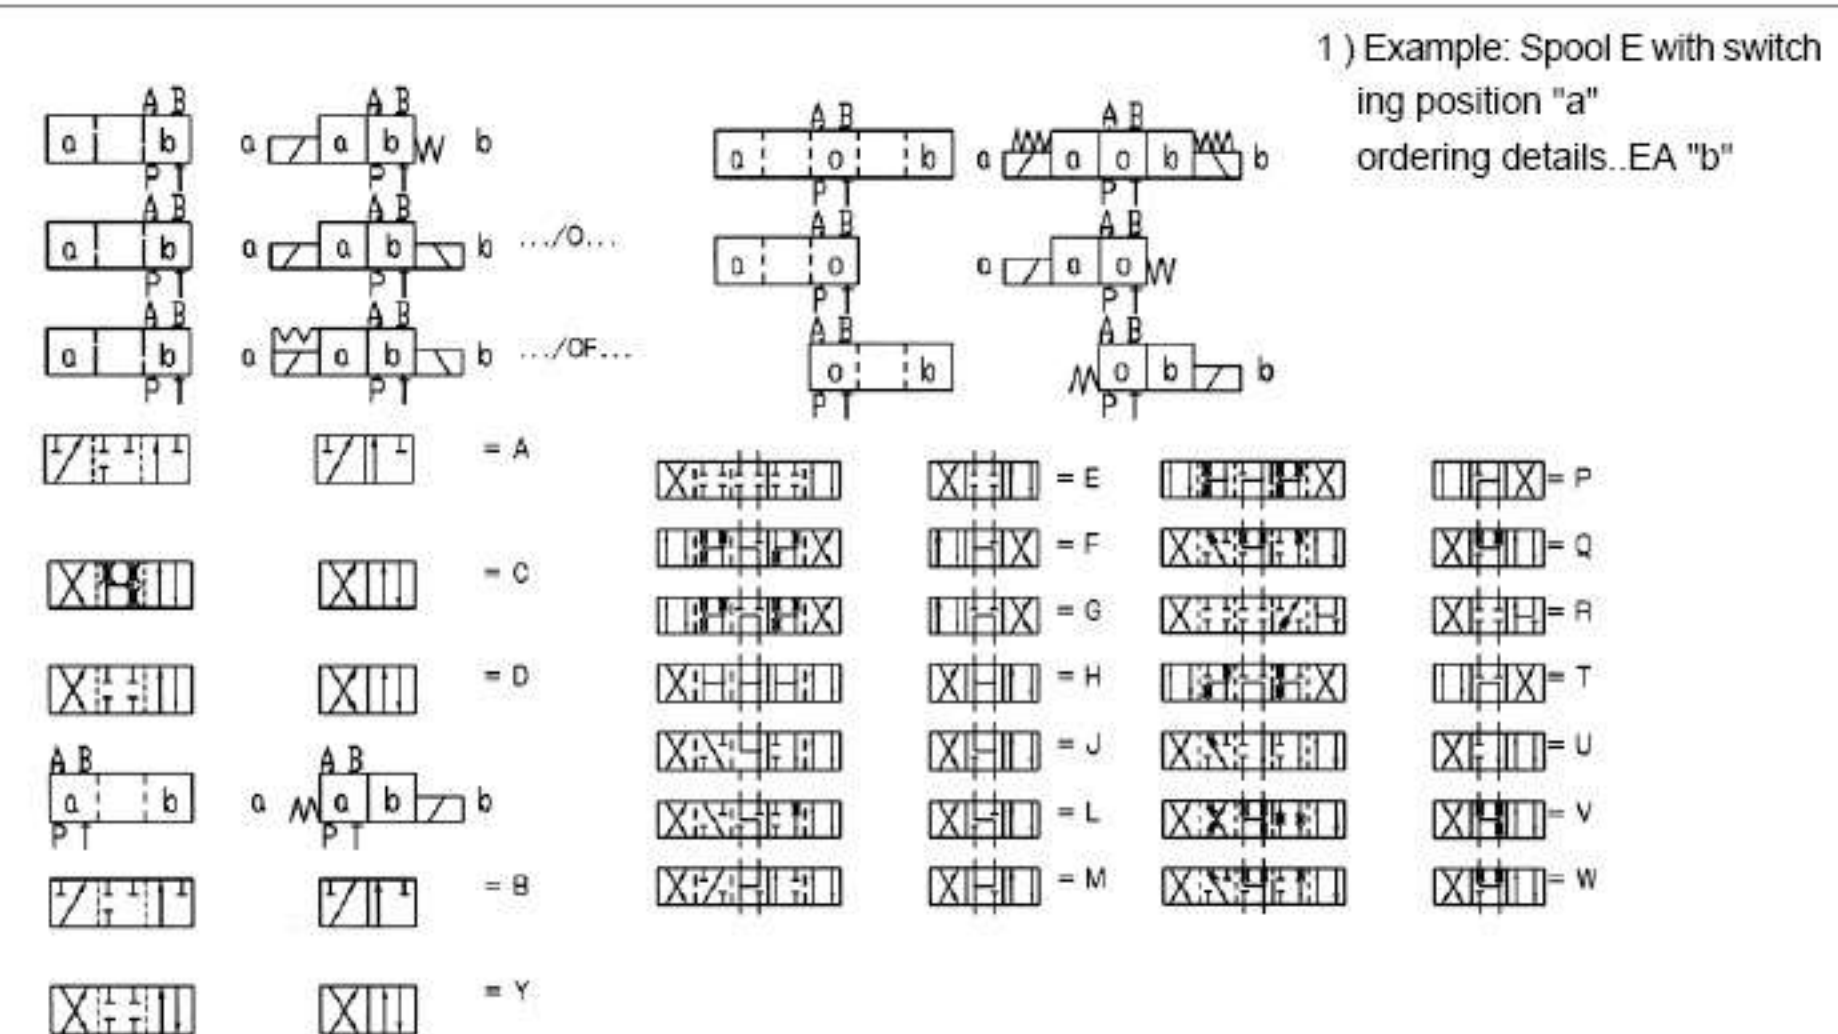

Technical data

Hydraulic

Max.operating pressure Ports A,B,P	(MPa)	up to 35.0
Port T	(MPa)	21 (-);16 (~)
		with symbols A and B, port T must be used as drain port if the operating pressure is above the permitted tank pressure.
Max.flow	(L/min)	80 (-);60 (~)
Pressure fluid		mineral oils or phosphate ester
Viscosity range	(mm ² /s)	2.8 ~ 500
Pressure fluid temperature range	(°C)	-30 ~ +80
Degree of contamination		Maximum permissible degree of contamination of the hydraulic fluid to NAS 1638 class 9. We therefore recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.


Electrical

Voltage type		DC	AC 50/60 Hz
Available voltages	(V)	12, 24, 42, 60, 96,	42, 110, 120, 230
		110, 180, 205, 220	50/60Hz
Power consumption	(W)	30	
Holding power	(VA)	-	50
Switch-on power	(VA)	-	220
Duty		continuous	continuous
Switching time to ISO 6403	ON	(ms)	25 to 45
	OFF	(ms)	10 to 25
Protection to DIN		IP 65	
Switching frequency	(cycles/h)	up to 15000	up to 7200

With electrical connections the protective conductor (PE) must be connected according to the relevant regulations.

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

7 Symbol "R " in switched position A → B
8 Symbols "G " and "T " in mid position P → T

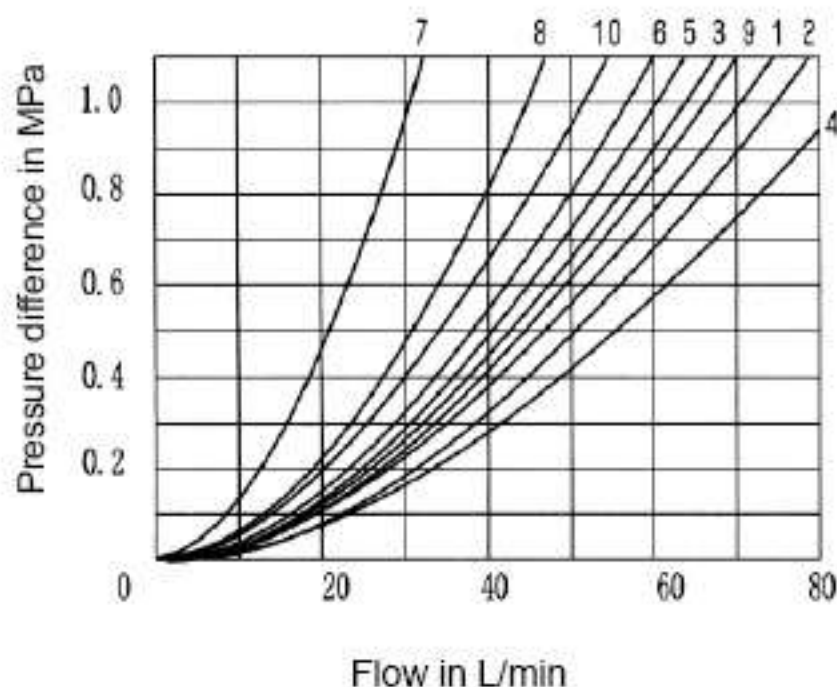

Symbols	Flow direction			
	P→A	P→B	A→T	B→T
A, B	3	3	-	-
C	1	1	3	1
D, Y	5	5	3	3
E	3	3	1	1
F	1	3	1	1
T, G	10	10	9	9
H	2	4	2	2
J, Q	1	1	2	1
L, U	3	3	4	9
M	2	3	3	3
P	3	1	1	1
R	5	5	4	-
V	1	2	1	1
W	1	1	2	2

Performance limits (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)


The given switching power limits are for applications with two flow directions (e.g. from P to A and simultaneous return flow from B to T).

Due to the flow forces active within the valves the permissible switching power limit may be significantly less if there is only one direction of flow (e.g. from P to A and port B blocked)!

(Please consult us for applications of this kind.)


The switching power limits were measured with the solenoids at operating temperature, 10% under voltage and without tank back pressure.

DC solenoid G24;24V		AC solenoid - W220;220V,50Hz		AC solenoid - 60Hz W220;220V,60Hz	
Char. curve	Symbol	Char. curve	Symbol	Char. curve	Symbol
1	A, B ¹⁾	11	A, B ¹⁾	19	A, B ¹⁾
2	V	12	V	20	V
3	A, B	13	A, B	21	A, B
4	F, P	14	F, P	22	F, P
5	J	15	G, T	23	G, T
6	G, H, T	16	H	24	J,L,U
7	A/O, A/O ²⁾ , L, U	17	A/O, A/O ²⁾ , C/O, C/O ²⁾	25	A/O, A/O ²⁾ , Q,W
8	C, D, Y		DO, DO ²⁾ , E, E1 ²⁾ , J, L	26	C, D, Y
9	M		M, Q, R ³⁾ , U, W	27	H
10	E, E1 ²⁾ , R ³⁾ , C/O C/O ²⁾ , D/O, D/O ²⁾ , Q, W	18	C, D, Y	28	C/O, C/O ²⁾ , D/O, D/O ²⁾ , E, E1 ²⁾ , M, R ³⁾

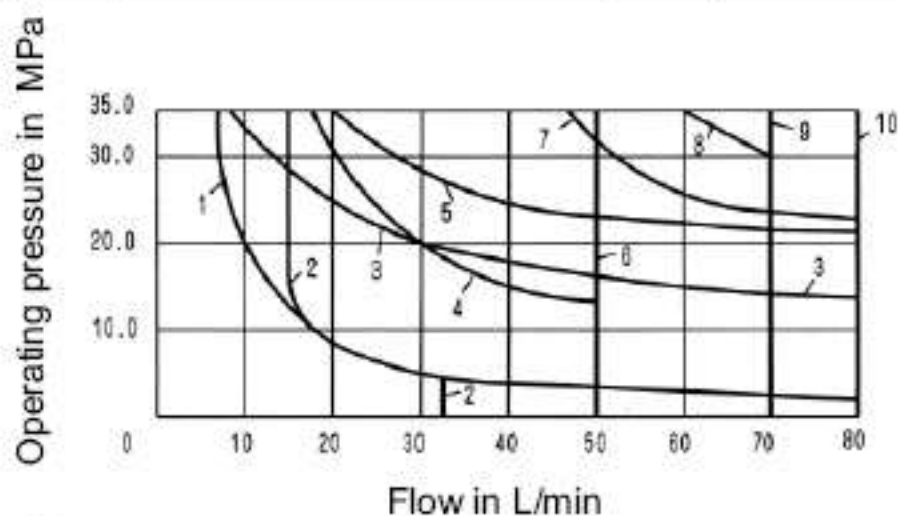


- 1) With hand override
- 2) P → A/B pre-opening
- 3) Return flow from actuator to tank

DC solenoid
Char. curve
1 to 10

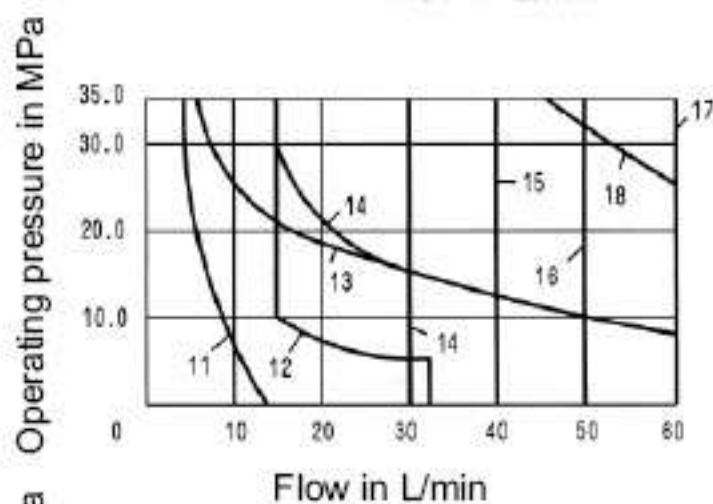


AC solenoid		
Char. curve	Solenoid voltage	
	11 to 18	W42
W110		110V, 50Hz
		120V, 60Hz
W220		220V, 50Hz

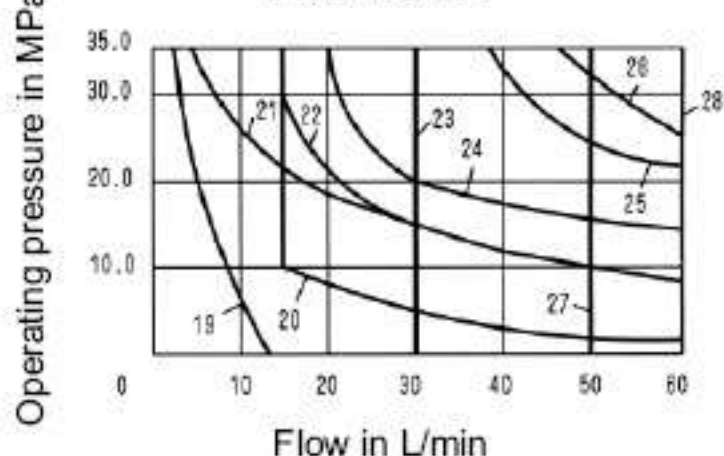


AC solenoid		
Char. curve	Solenoid voltage	
	19 to 20	W42
W110		110V, 60Hz
W220		220V, 60Hz

Unit dimensions: valve with DC solenoid

Individual connections:

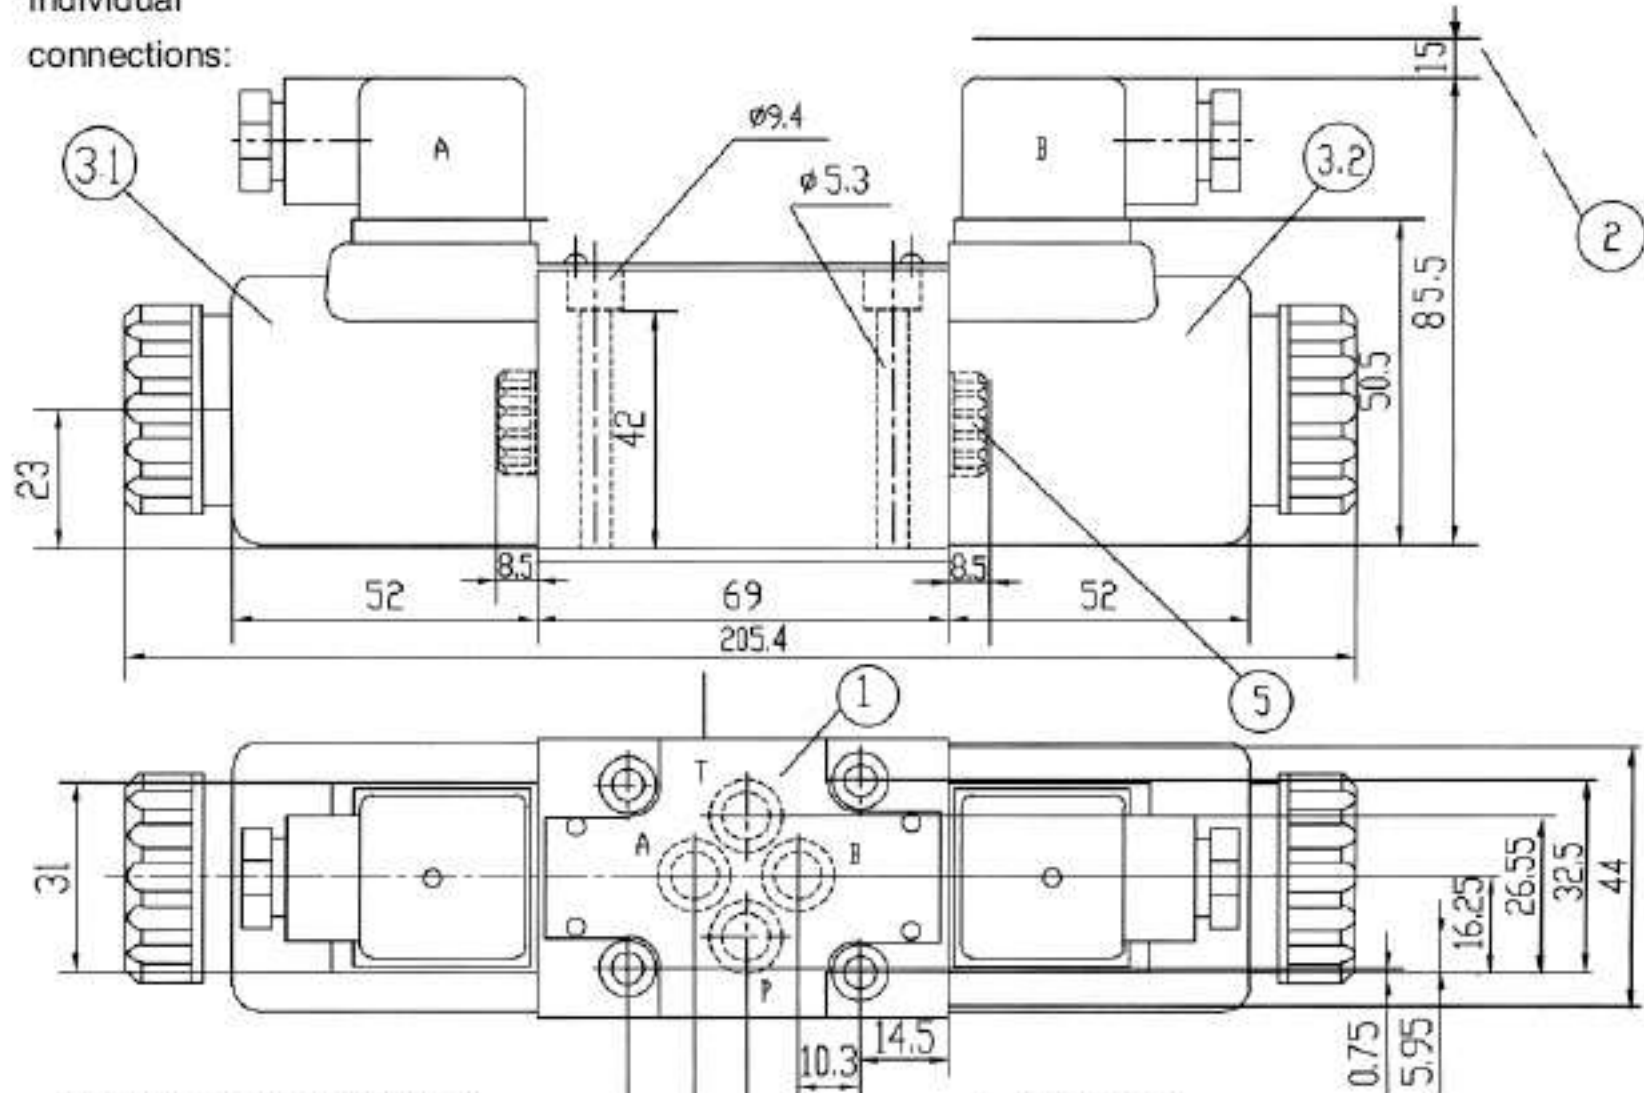


Required surface finish of mating piece

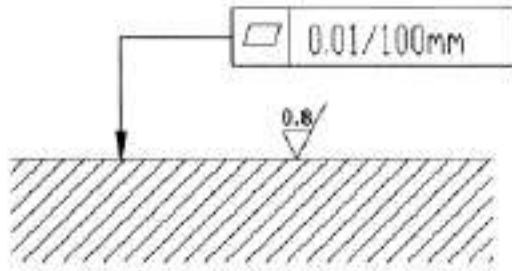

- 1. Nameplate
- 2. Space required to remove the plug-in connector
- 3. 1 Solenoid "a" (colour of the plug-in connector, grey)
- 3. 2 Solenoid "b" (colour of the plug-in connector, black)
- 4. O-ring: 9.25X1.78
- 5. Cover for valve with one solenoid


Central connections:

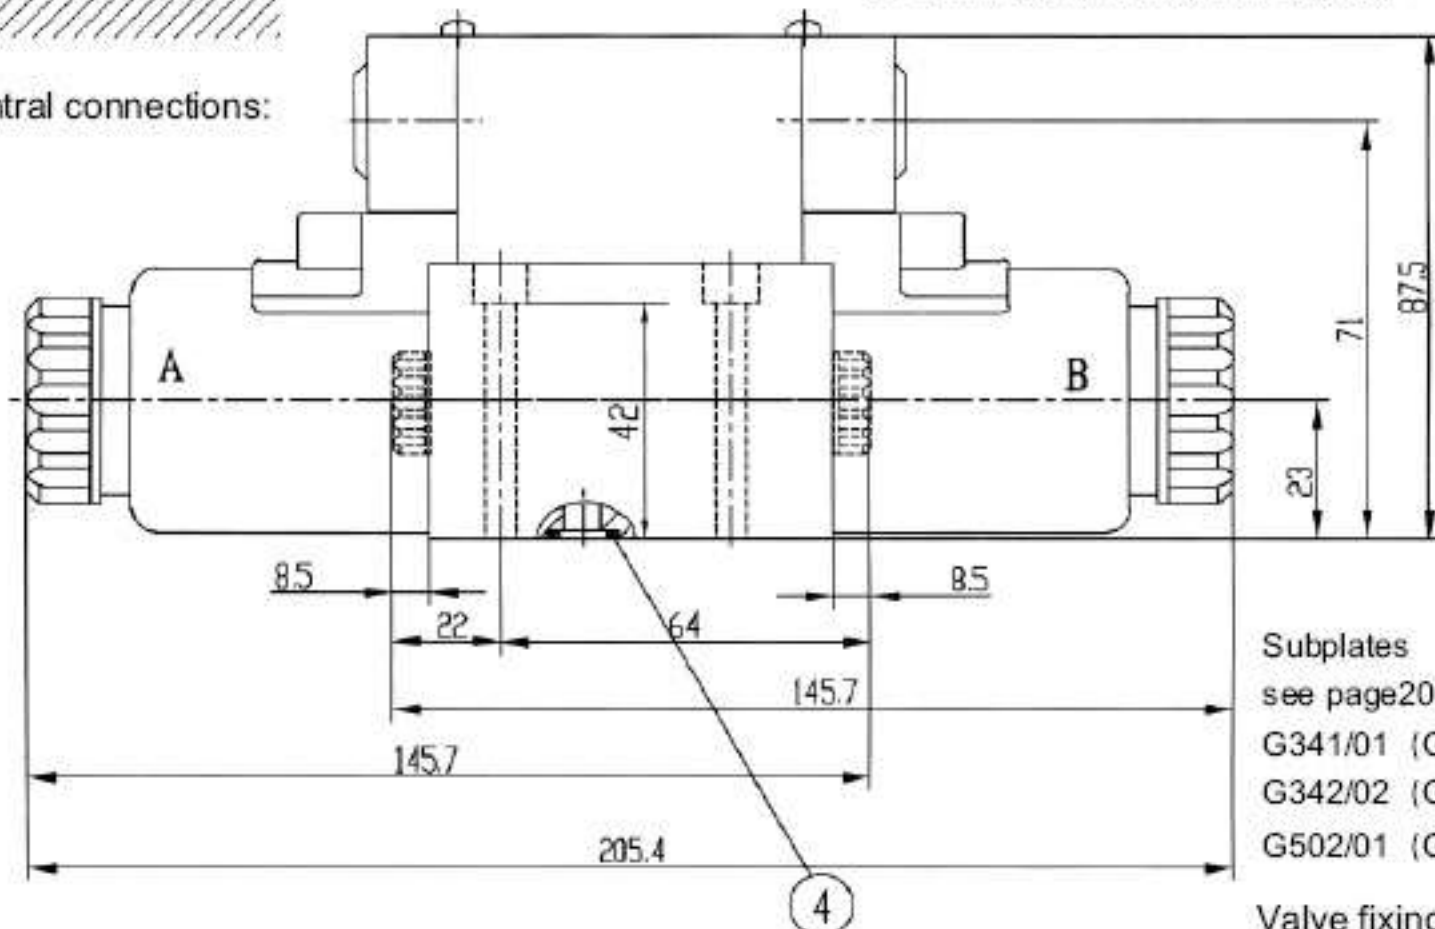

Subplates
see page 205
G341/01 (G1/4");
G342/02 (G3/8");
G502/01 (G1/2");


Valve fixing screws
M5X50 -10.9
(GB/T70.1-2000)
 $M_A=8.9Nm$

Unit dimensions: valve with AC solenoid

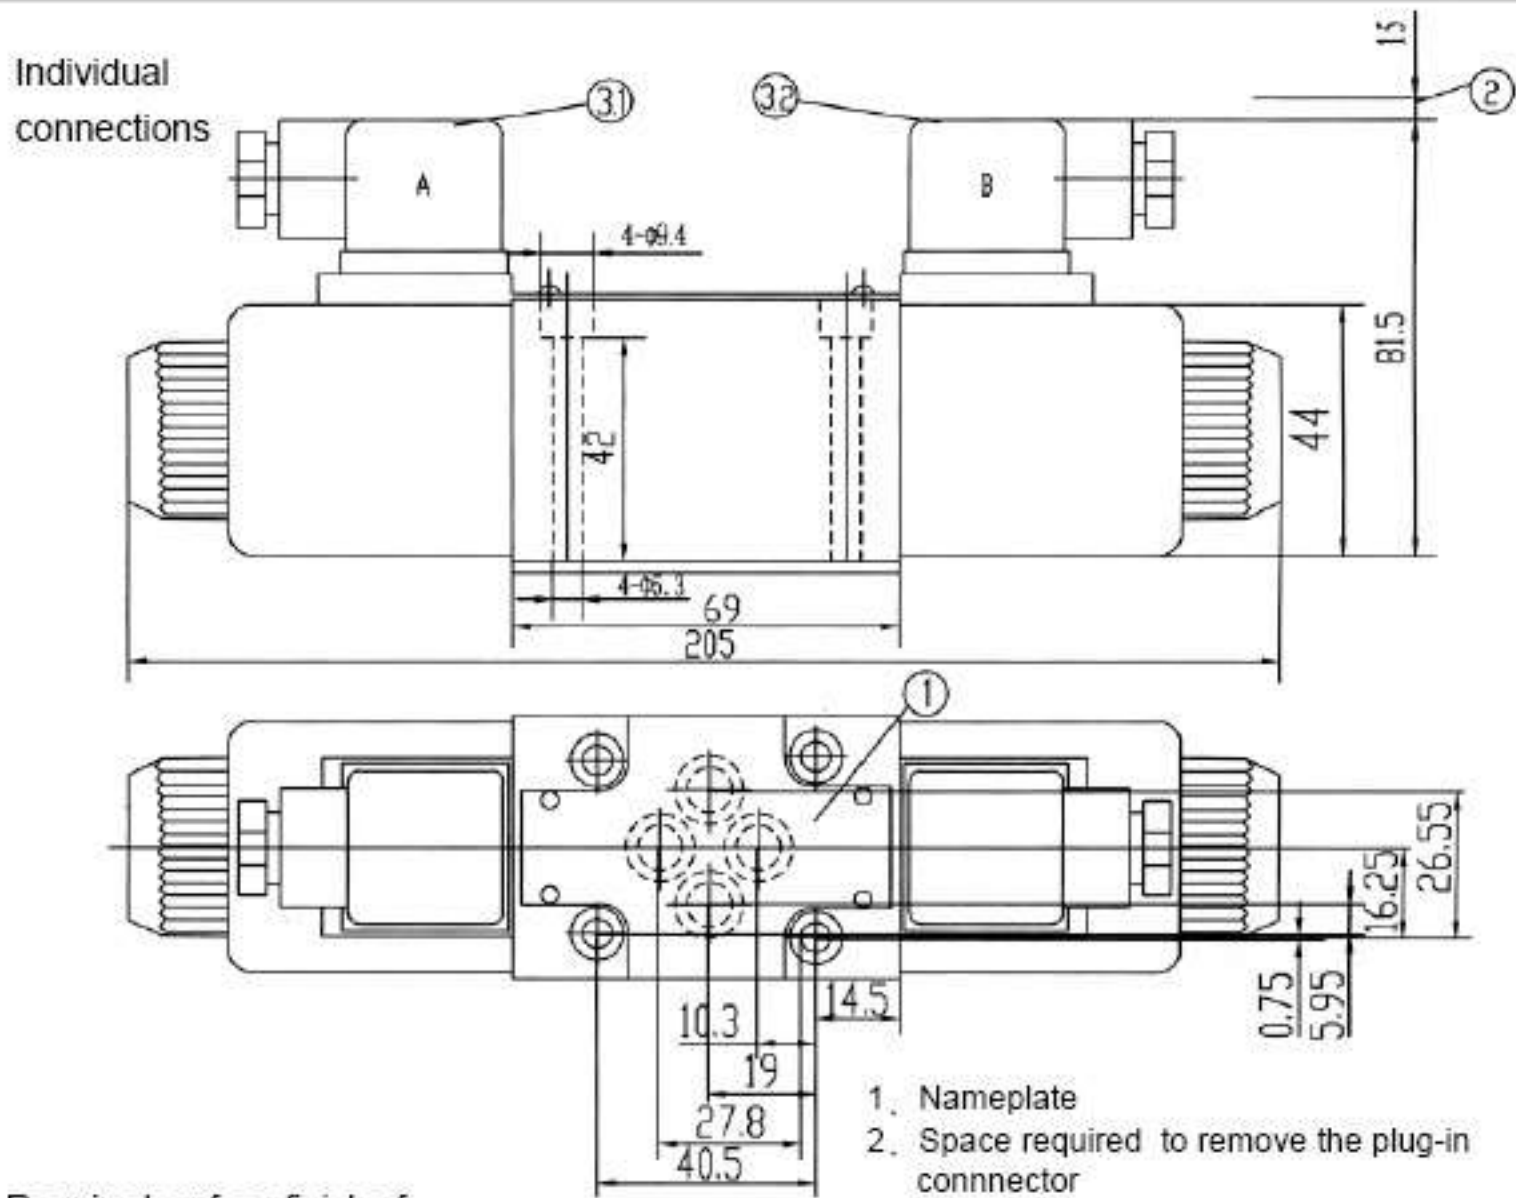


1. Nameplate
2. Space required to remove the plug-in connector
3. 1 Solenoid "a" (colour of the plug-in connector, grey)
3. 2 Solenoid "b" (colour of the plug-in connector, black)
4. O-ring, 9.25X1.78

Required surface finish of mating piece

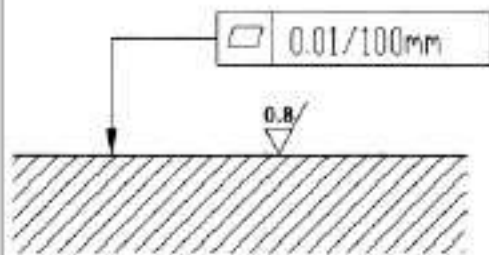

Central connections:

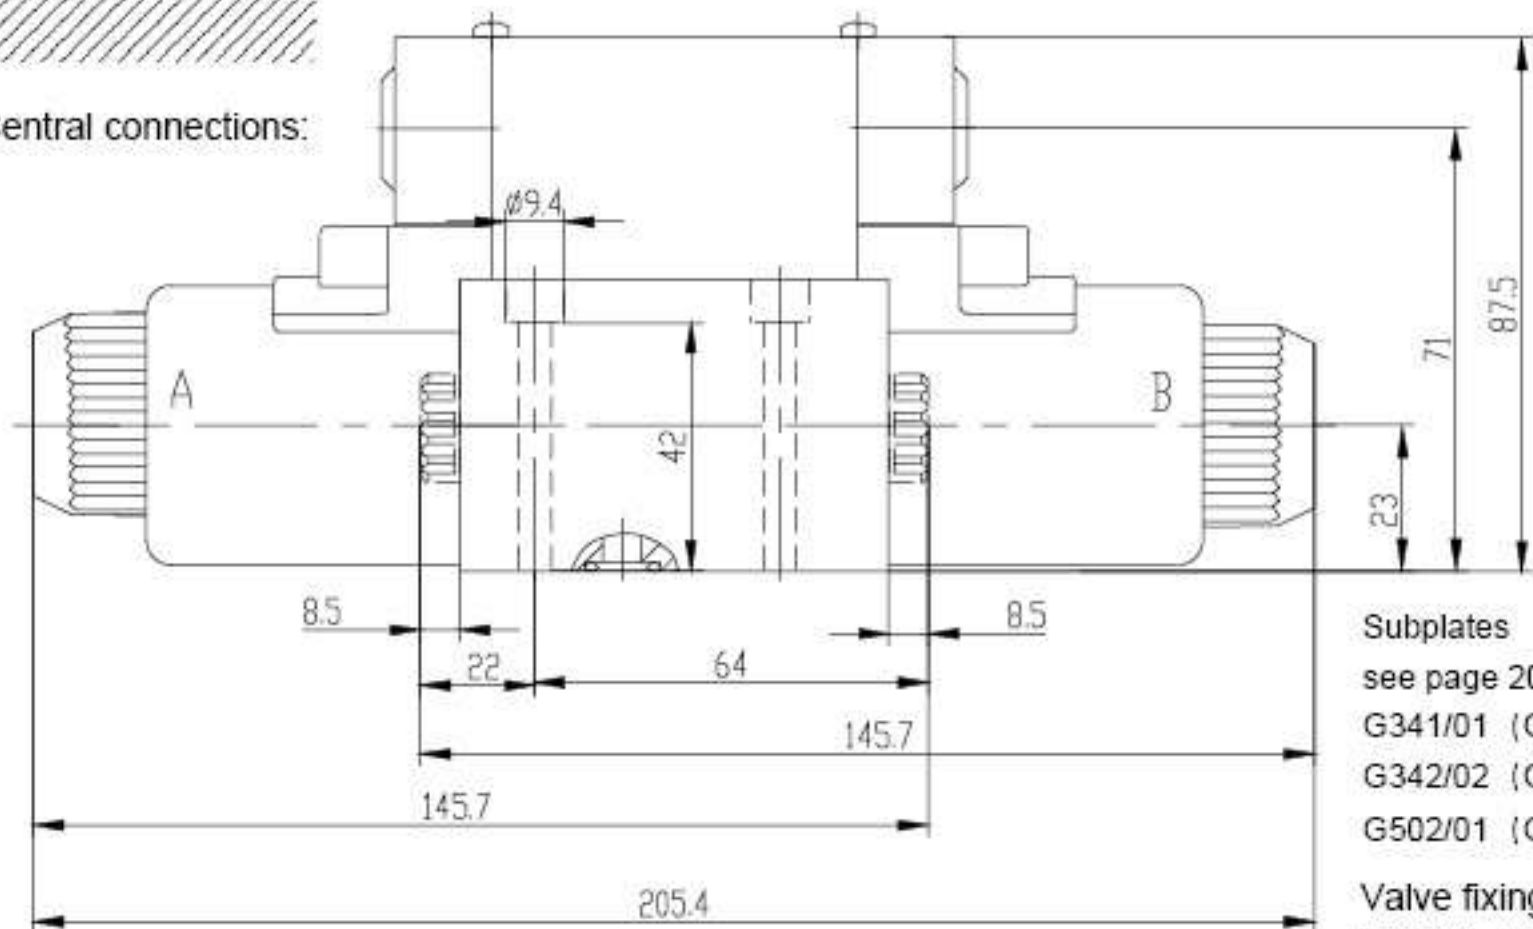

Subplates
see page 205
G341/01 (G1/4");
G342/02 (G3/8");
G502/01 (G1/2");

Valve fixing screws
M5X50 -10.9
(GB/T70.1-2000)
 $M_A=8.9Nm$

BEIJING HUADE HYDRAULICS INDUSTRIAL GROUP CO.,LTD.	Directional control valves Type WE 10...20B/			RE 23314/12.2004
	Size 10	up to 31.5 MPa	up to 100L/min	Replaces: RE 23314/05.2001

Features:

- Direct solenoid operated directional spool valve as standard version
- 53 kinds spool function
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Functional,section

Directional valves of type WE are solenoid operated directional spool valves. They control the start, stop and direction of a fluid flow.

These directional valves basically consist of the housing (1), one or two solenoids (2), the control spool (3), and one or two return springs (4).


In the de-energized condition, the control spool (3) is held by the return springs (4) in the central or in the initial position (except for detented spools). The control spool (3) is actuated via wet pin solenoids(2).

The force of the solenoid (2) acts via the plunger (5) on

the control spool (3) and shifts the same from its rest position to the desired end position. Thus, the required flow pattern from P to A and B to T or P to B and A to T is selected.

When the solenoid (2) is de-energized, the control spool (3) is returned to its neutral position by the return spring (4).

A manual override (6), optional, is provided for emergency operation of the control spool (3) without energization of the solenoid.

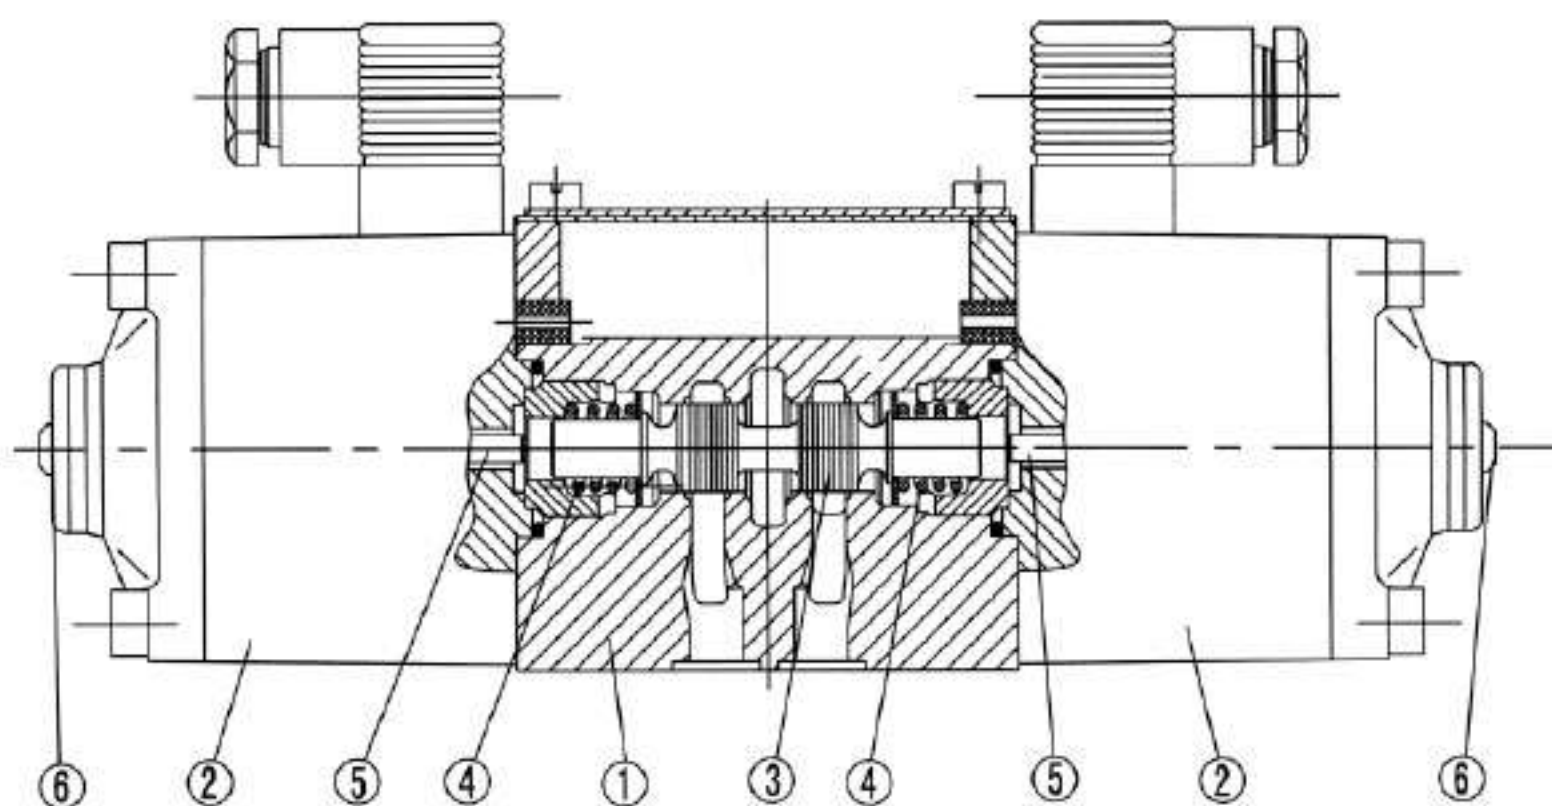


Type WE10...20B/A...

A

Type WE 10 C 20B/OA :

D

This version is a directional valve with 2 switching positions and 2 solenoids without detent. and spring return There is no defined switching position in the de-energized condition.

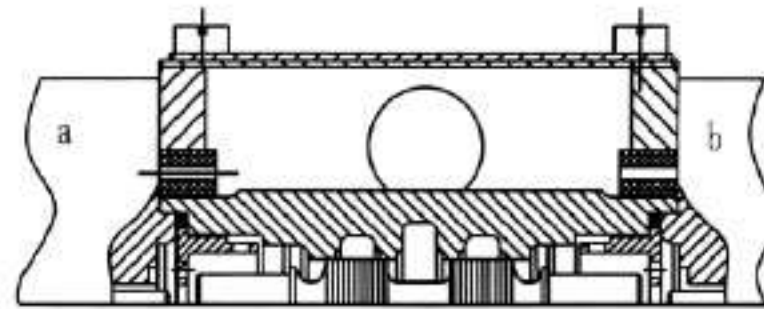


Type WE10...20B/OA

A

Type WE 10 C 20B/O FA :

D

This version is a directional valve with 2 switching position, 2 solenoids and a detent without spring return. Thus, the relevant switching positions are fixed and continuous energization of the solenoid is not necessary.

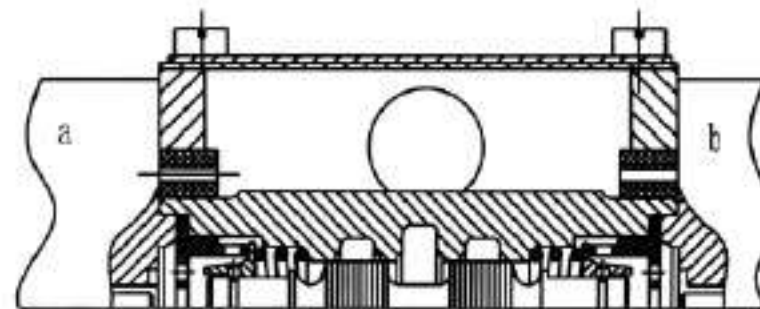

Type WE10...20B/OFA

Throttle inserts

The use of throttle inserts is only required, if, due to the operating conditions, flows are to be expected, which are higher than the stated maximum performance limits of the valve.

It is inserted in the P channel of the directional valve.



cartridge throttle

Solenoid



Wet pin solenoid life is much longer because gag bit moves in the oil ,just lessening hydraulic impact and abrasion ,i mproving the speed of emanating heat.

The characteristics of DC solenoids .

- Switching gently ,high frequency .
- Coils are all safety wherever gag bit stays at any position of the solenoid .
- Its response is not rapid for lower voltage ,go beyond voltage instantly,over loading or jamming of mechanism .
- AC power supply can be used through commuting.

The characteristic of AC solenoids.

- The circuitry of electrical control is easy.
- Action time is short.
- It is not necessary of special protect device for on-off.

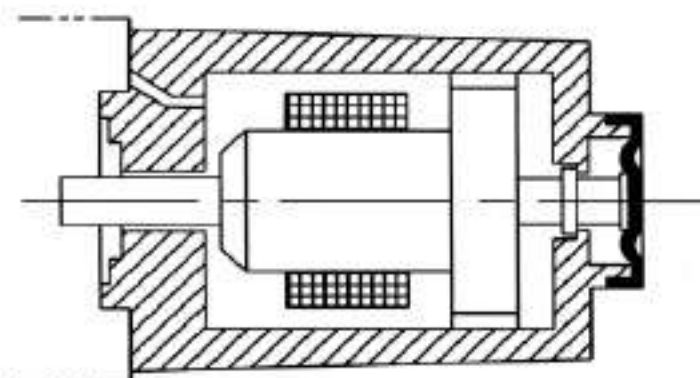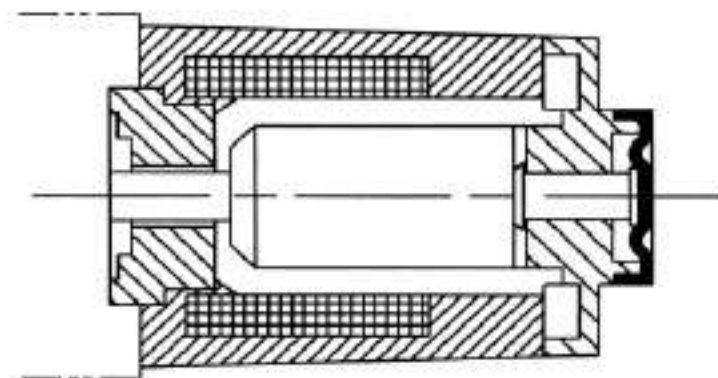

Ordering code



3 Service ports = 3
4 Service ports = 4

Nominal size 10 =10

Further details in clear text

No code = mineral oils
V = phosphate ester

No code = Without cartridge throttle
B08 = Throttle, ϕ 0.8 mm
B10 = Throttle, ϕ 1.0 mm
B12 = Throttle, ϕ 1.2 mm

Electrical connection see page 105


N= With manual override
No code= Without manual override

W220-50= 220 V AC 50 Hz
G24= 24 V DC
W220R = AC 110V 220V
W110R = AC solenoid with plug Z5


No code= With spring return
OF= Without spring return, with detent
O= Without spring return

B = Technology of Beijing Huade Hydraulic

20 = Series 20 to 29
(20 to 29: unchanged installation and connection dimensions)

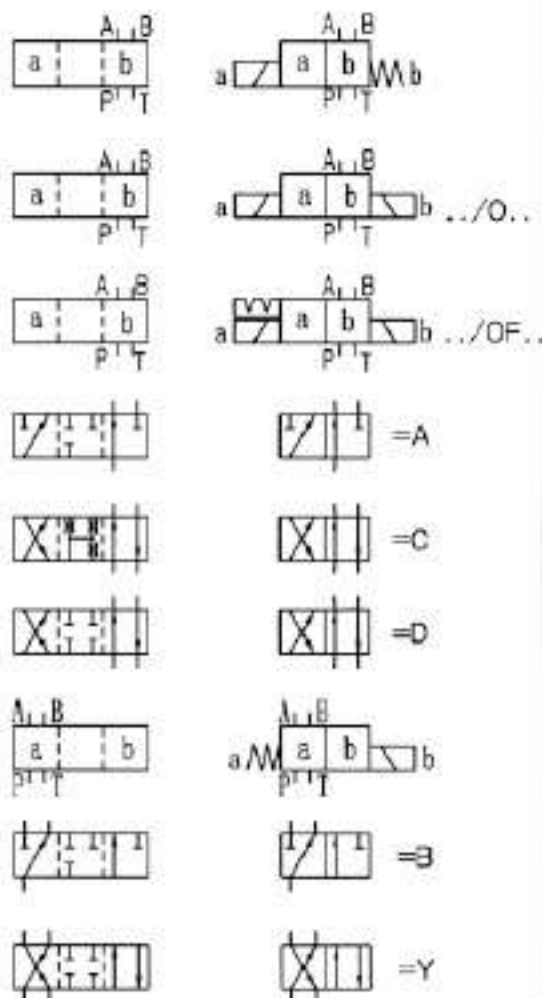

1) symbol E1-, P A/B, previous port

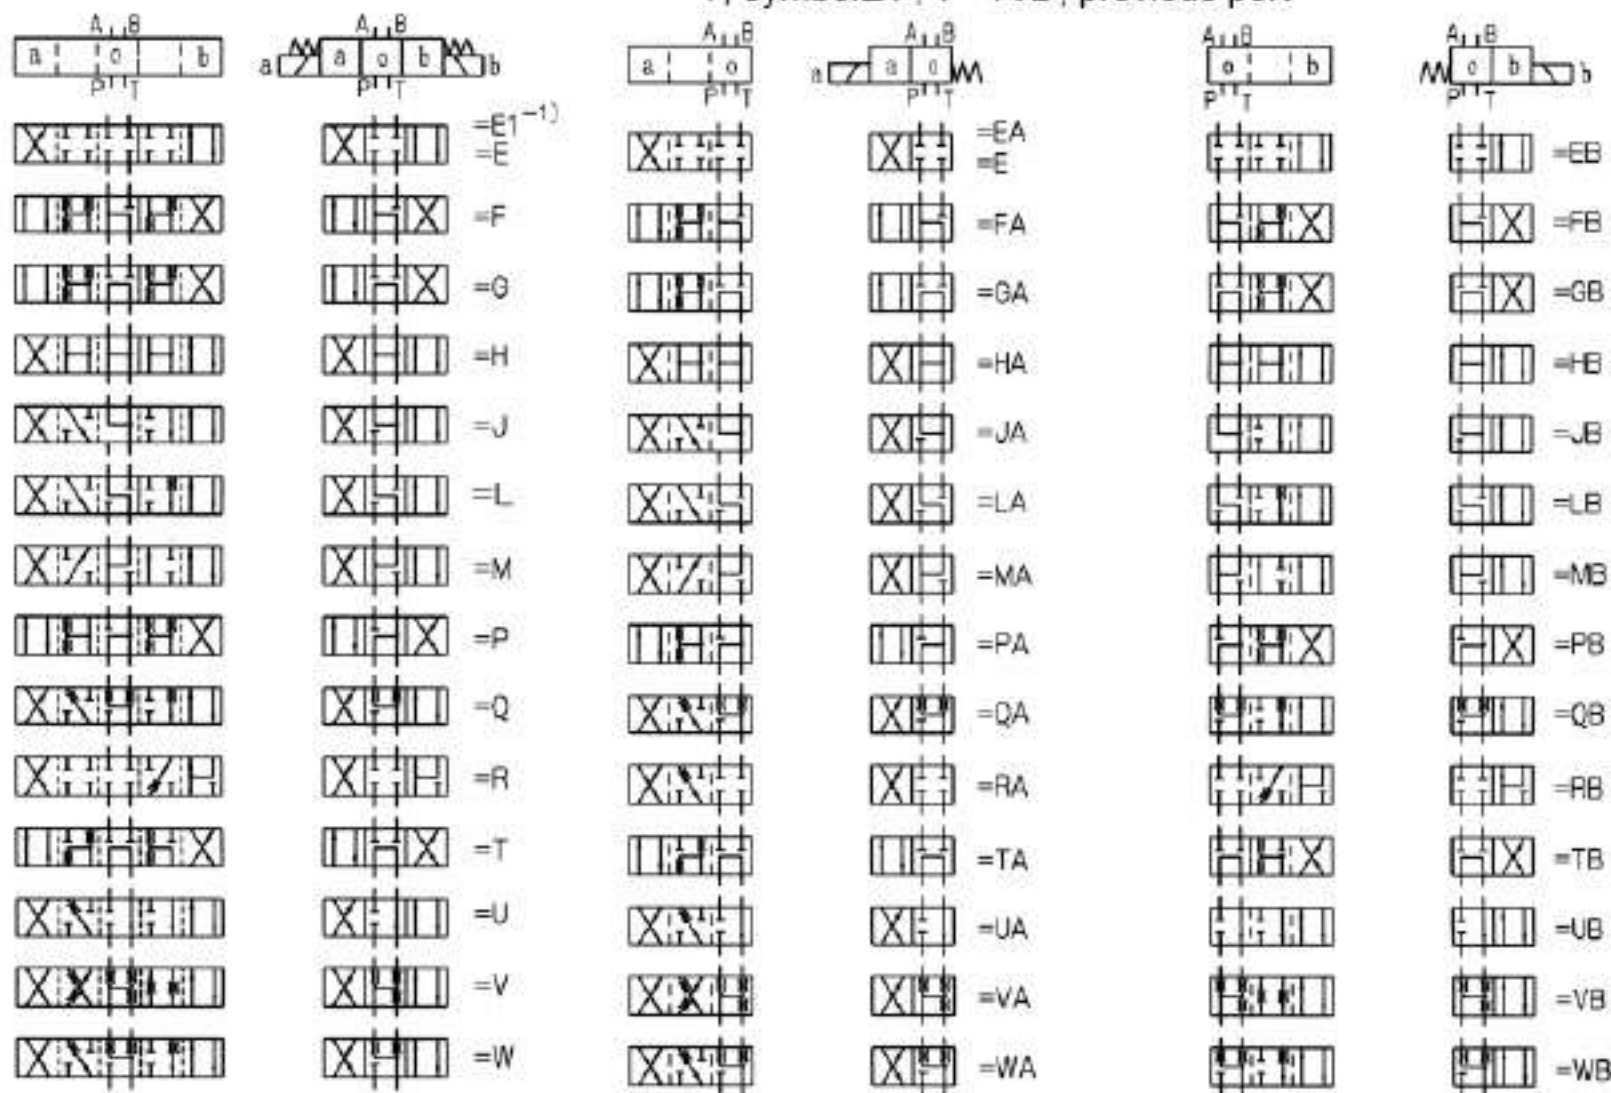

Technical data

Hydraulic operation part

Operating press., max.	Port A, B, P (MPa)	up to 31.5
	Port T (MPa)	up to 16
Flow, max. q_v	(L/min)	up to 100
Flow area (switching position 0)		With symbol Q approx. 6 % of the nominal area With symbol W approx. 3 %
Hydraulic fluid		mineral oils or phosphate ester
Fluid temperature range	(°C)	-30 – +80
Viscosity range	(mm ² /s)	2.8 – 500
Weight (K g)	Valve with 1 solenoid	4.7 (DC), 4.2 (AC)
	Valve with 2 solenoids	6.6 (DC), 5.6 (AC)

Note: With symbol A and B, port T must be used as drain port, if the operating pressure is higher than the permissible tank pressure.


Electrical operation part

Voltage type		AC	DC
Voltages available	(V)	110, 220/50Hz	12, 24, 110
Power consumption	(W)	-	35
Holding power P	(VA)	65	-
Making current P	(VA)	480	-
Duty cycle		Continuous	
Switching time ON	(ms)	15 – 25	50 – 60
Switching time OFF	(ms)	40 – 60	50 – 70
Environment temperature	(°C)	+50	
Coil temperature	(°C)	+150	
Switching frequency	(cycles/h)	7200	15000
Insulation to DIN 40 050		IP65	

Note: When connecting the electrics, the protective conductor (PE) must be connected according to relevant regulations.

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

7 Symbol "R" in switched position A → B
 8 Symbols "G" and "T" in mid position P → T

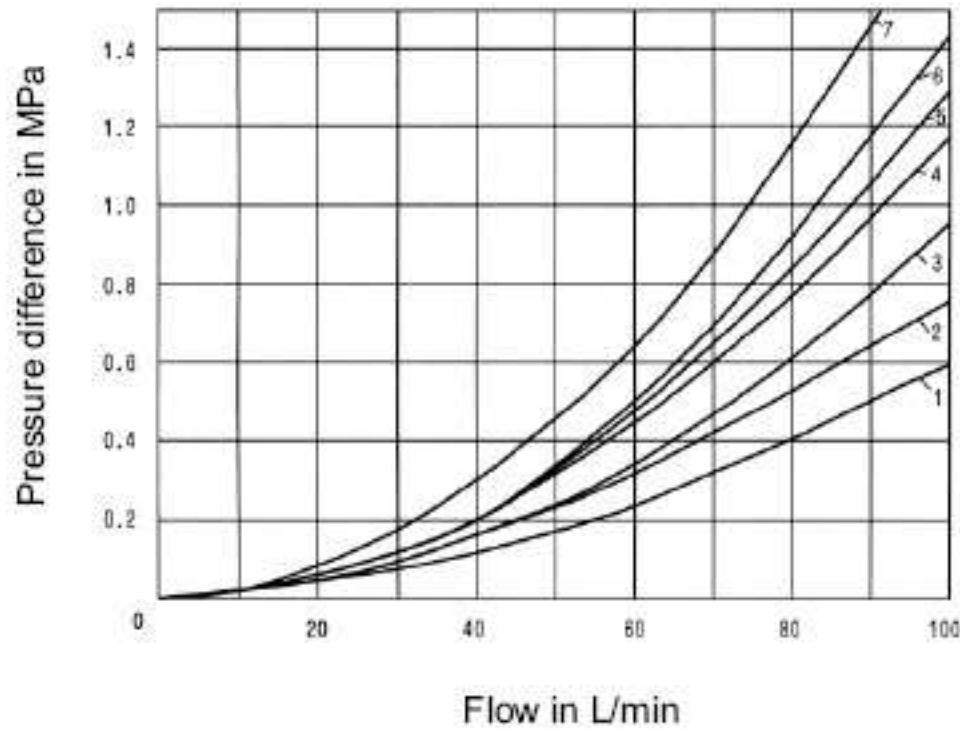


Symbol	Flow direction			
	P - A	P - B	A - T	B - T
A,B	2	2	-	-
C,D,Y,J	2	2	3	3
E,Q,V	2	2	4	4
F	2	3	3	5
G	3	3	4	6
H	1	1	4	5
L,U	2	2	3	5
M	1	1	5	5
P	3	2	5	3
R	2	4	3	-
T	3	5	5	6
W	2	2	5	5

Switching power limits (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50 \text{ }^\circ\text{C}$)


Because gluing effect influence valves switching, for attaining the biggest recomendatory value, suggest adopting the whole flux filter of $20\mu\text{m}$ in system the hydraulic impetus also affects the flux ability of valve, so different spool valve contain different work curve. for the valve of size 4, the value is given in the condition that two passages work nomally (e.g from P to A at the same time B to T) due to the flow forces active within the valves the permissible switching power limit may be significantly less if there is only one direction of flow.

The switching power limits were measured with the solenoids at operating temperature, 10% under voltage and without tank back pressure.

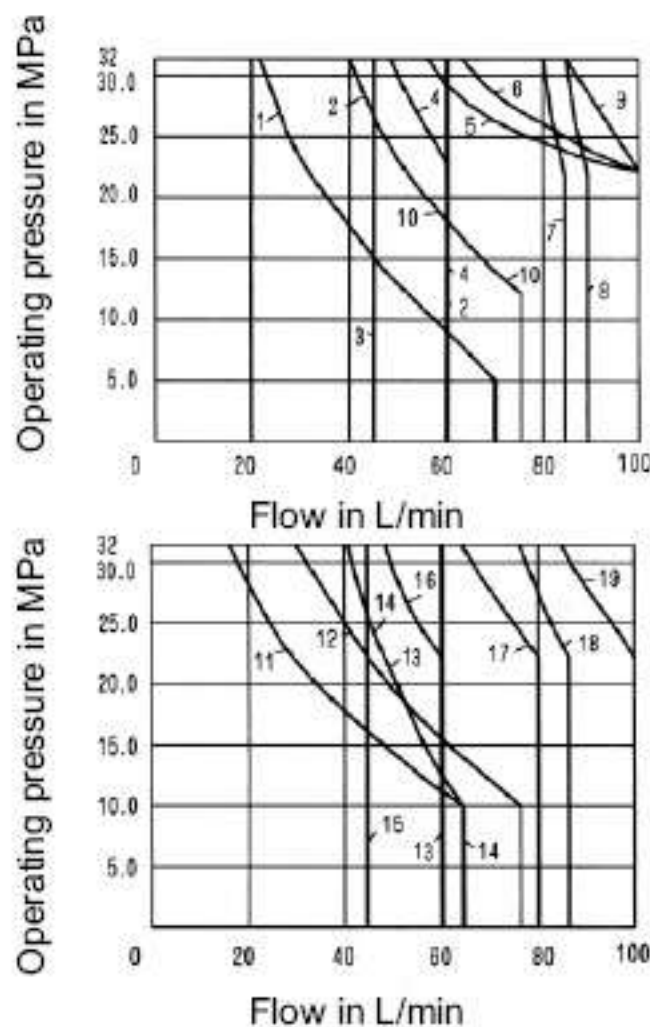


DC solenoid		AC solenoid	
Char. curve	Symbol	Char. curve	Symbol
1	A,B	11	A,B
2	F,P,T	12	H
3	V	13	F,P,T
4	G	14	A/O
5	E,L,Q,U,W	15	V
6	J	16	G
7	D,Y	17	J,L,U
8	G,R	18	C, D, Y, Q, R, W
9	M,C/O,D/O	19	C/O,D/O,E,M
10	H,A/O		




Unit dimensions

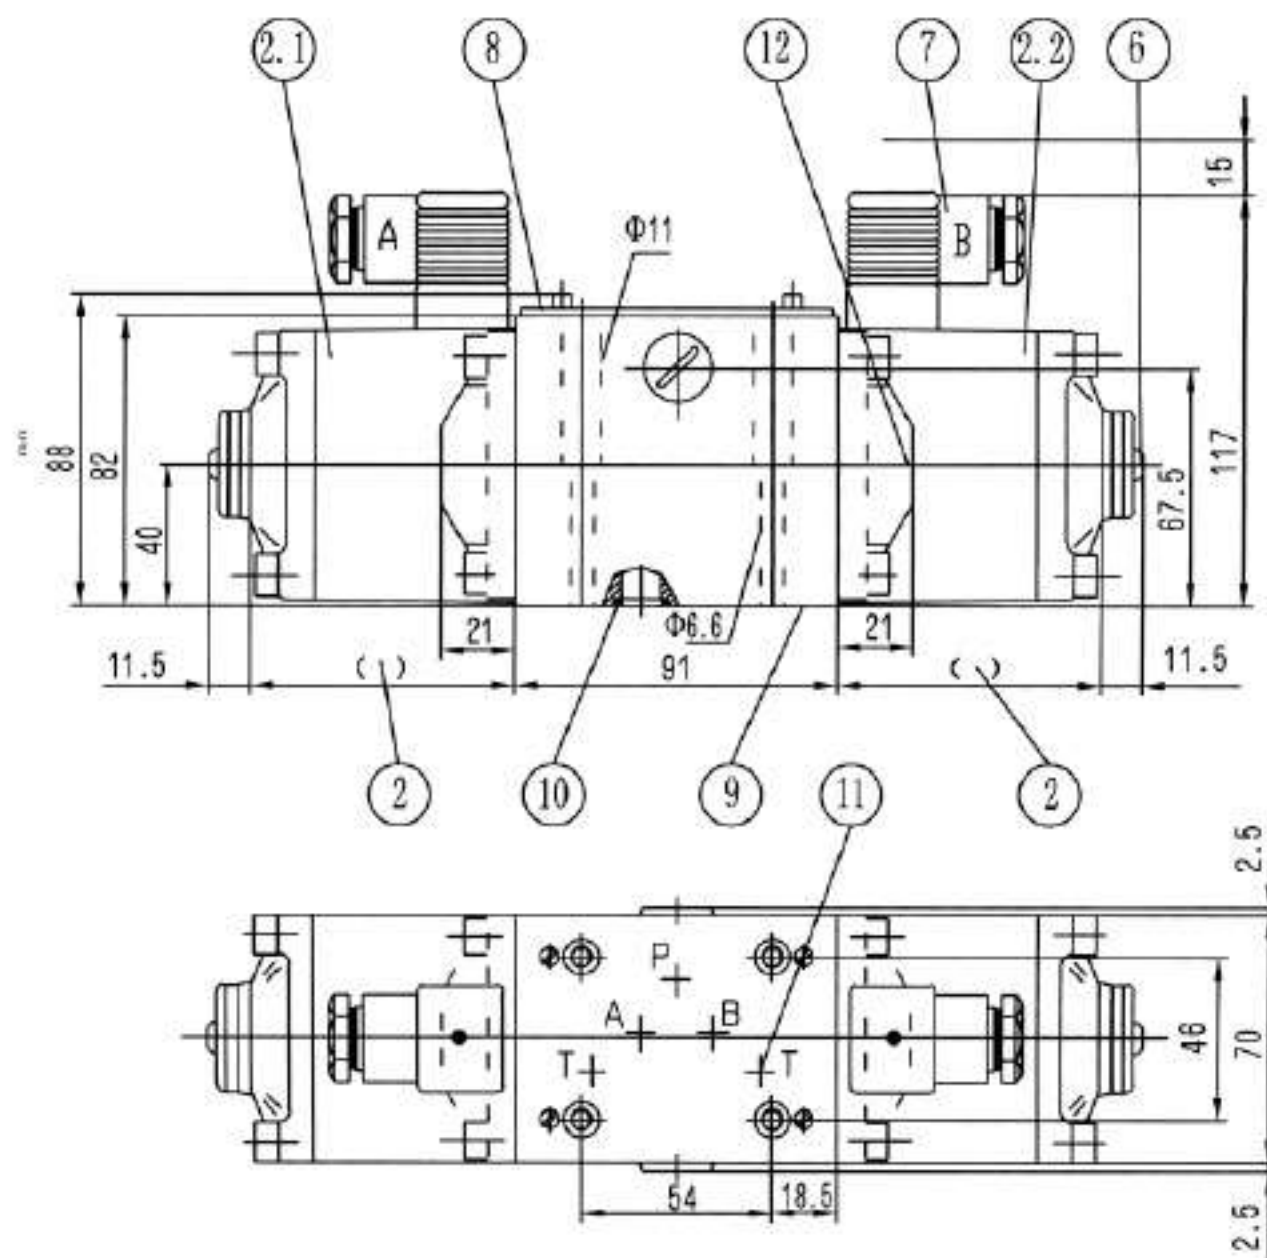

the connection dimensions of service ports

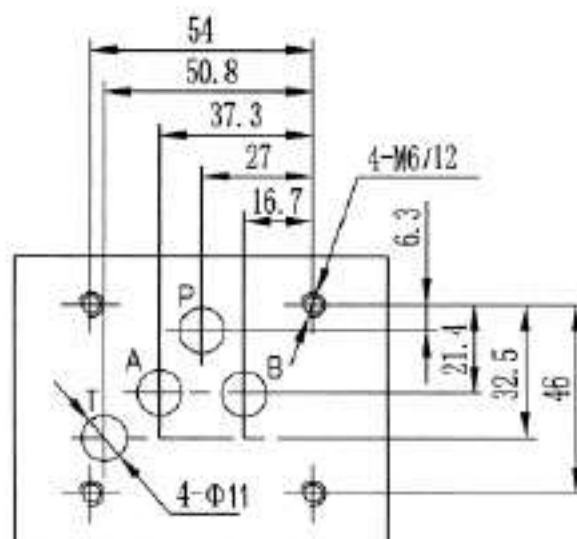

- | | | | |
|------|--|----|---|
| 2 | DC solinoid(without manual override)
94mm
AC solinoid(without manual override)
75mm | 9 | Service port |
| 2 .1 | Solenoid "a" (colour of the plug-in
connector: grey) | 10 | O-ring 12x2 |
| 2 .2 | Solenoid "b" (colour of the plug-in
Connector: black) | 11 | Accessional T must be used(except for
ZDR10D...)if making a hole at subplate |
| 6 | Manual override "N" | 12 | Cover for valve with one solenoid
Subplates: see page206 |
| 7 | Plug Z4 | | G66/01(G3/8") G66/02(M18 × 1.5) |
| 8 | Nameplate | | G67/01(G1/2") G67/02(M22 × 1.5) |
| | | | G534/01(G3/4") G534/02(M27 × 2) |
| | | ※ | Valve fixing screws |
| | | | 4-M6 × 50-10.9 (GB/T70.1-2000) |
| | | | $M_A=15 \text{ N.m}$ |

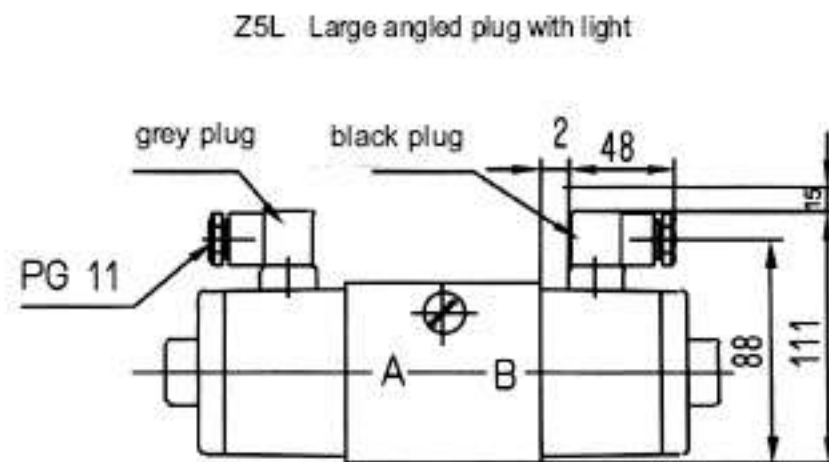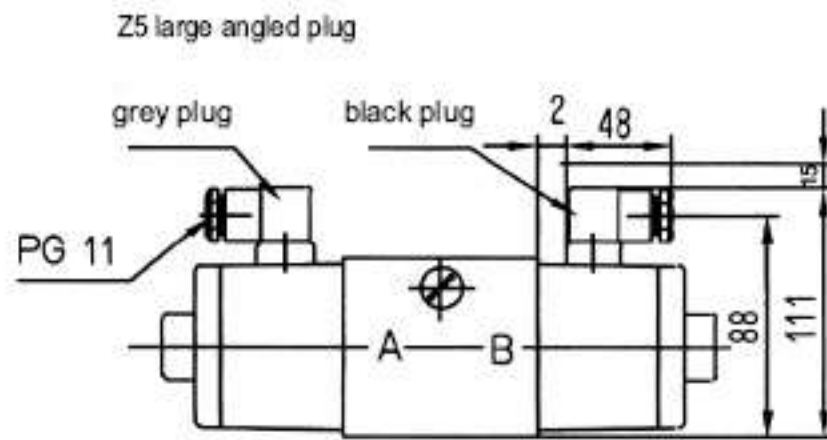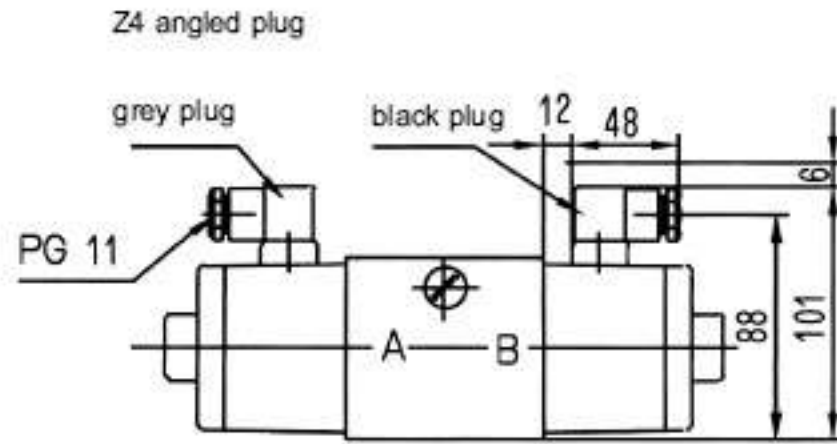

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves Type WE 10...30B/			RE 23316/12.2004
	Size 10	up to 31.5 MPa	up to 120L/min	Replaces; RE 23316/05.2001

Features:

- Direct solenoid operated directional spool valve as standard version
- Wet pin DC or AC solenoids with removable coils
- perfect outline
- Coils may be replaced without opening the pressure-tight chamber
- Choice of either central or individual electrical connections
- Optional hand over-ride
- long life
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H




Functional, section

Directional valves basically comprise the housing (1), one or two solenoids (2), control spool (3), and one or two return springs (4). At rest, control spool (3) is held in its central or initial position by means of return springs (4) (except in the case of impulse spools). Control spool (3) is operated by wet pin solenoids (2). The force of solenoid (2) acts on control spool (3) and moves it from its rest position to the desired end position. This permits free flow from P to A and B to T or P to B and A to T.

On de-energizing solenoid (2) control spool (3) is returned to its initial position by return spring (4).

Optional hand over-ride (5) permits control spool (3) to be moved without the solenoids being energized.

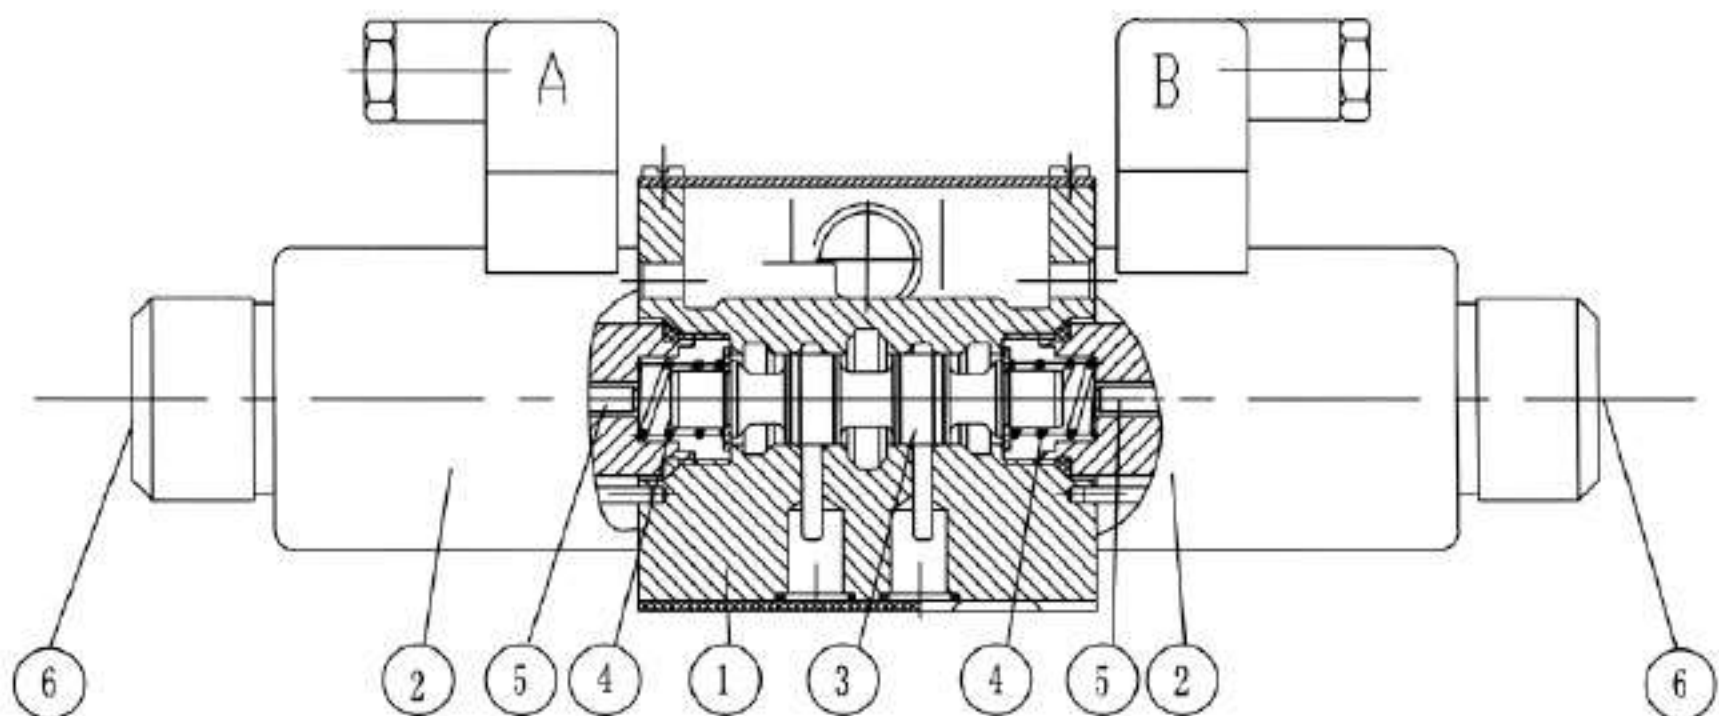

Type 4WE 10 ...30B/...C

Ordering code

WE 10 31 B / C *

3 service ports = 3
4 service ports = 4

Size 10 = 10

Symbols see below

Series 30 to 39 = 31
(30 to 39: unchanged installation and connection dimensions)

Technology of Beijing Huade Hydraulic =B

With spring return = No code
Without spring return, but with detent = OF
Without spring return = O

Wet pin solenoid with removable coil = C

W220= 220 V AC 50 or 240V AC 60 Hz
G24= 24 V DC
W220R = DC solinoid commuting automatically

With protected hand override (standard) = N9
Without hand override = No code
With hand override = N

Individual connections:
With component plug without plug-in connector =K4
Normal plug =Z4
Large angled plug =Z5
Large angled plug with indicator light =Z5L
Central connection:
Cable entry at side = No code
Cable entry in cover, with lamp = DL
Central connection in cover, with lamp (without angled plug-in connector) = DKL

Further details in clear text

No code = mineral oils
V = phosphate ester

No code = Without cartridge throttle
B08= Throttle, ϕ 0.8 mm
B10 = Throttle, ϕ 1.0 mm
B12= Throttle, ϕ 1.2 mm

Symbols



4) Example:

Spool E with switching position "a"

Ordering code ..EA..

Spool E with switching position "b"


Ord

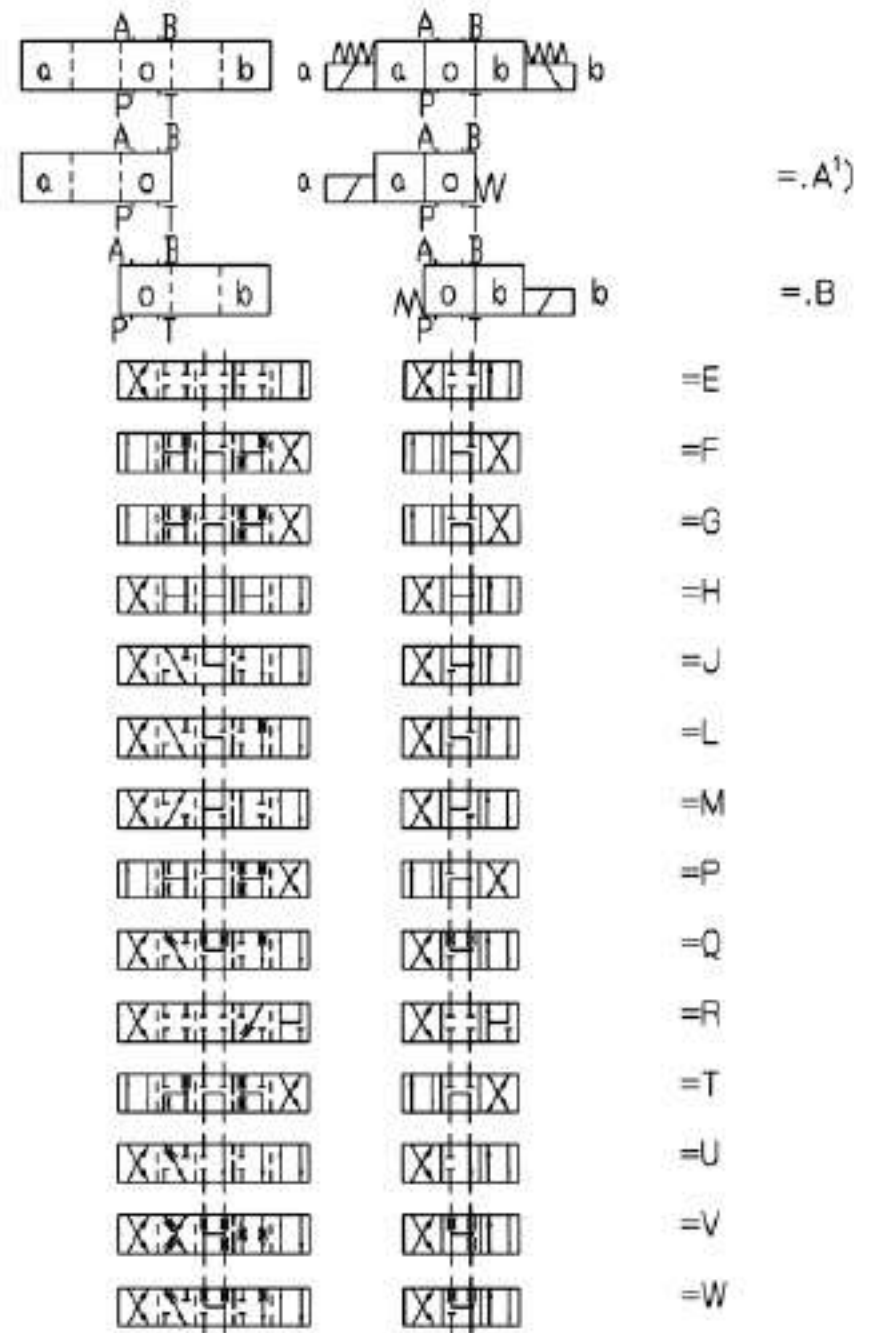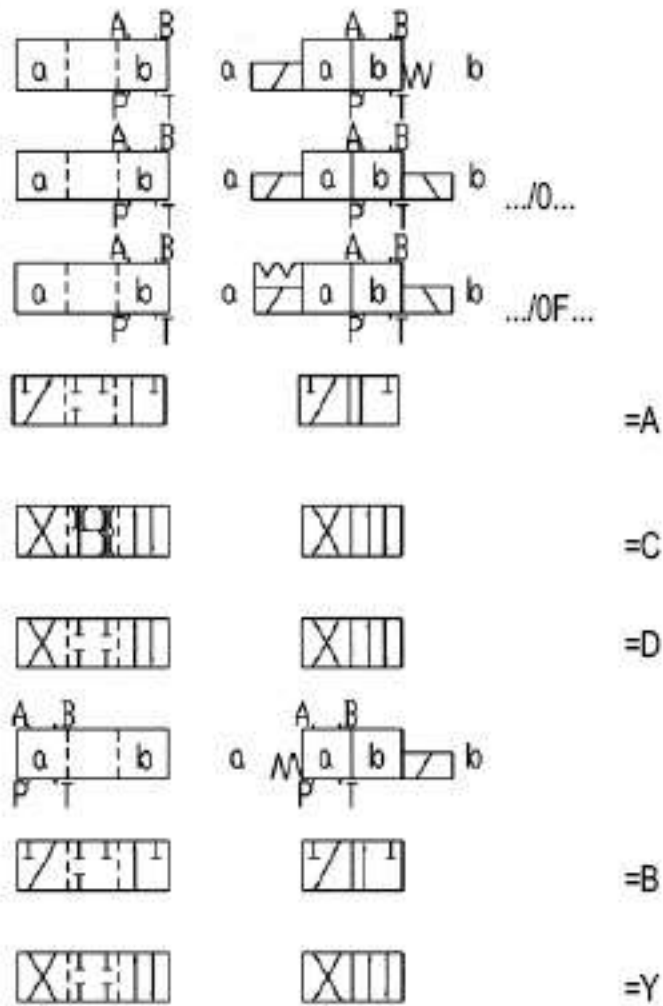

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

7 Symbol "R" in switched position A → B

8 Symbols "G" and "T" in mid position P → T

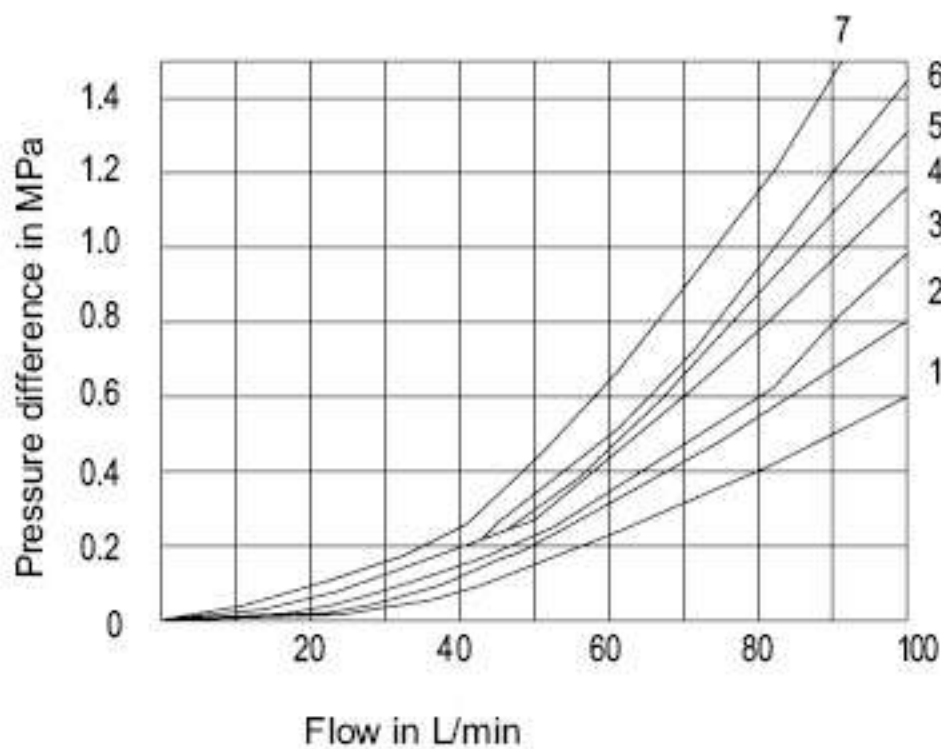


Symbols	Direction of flow			
	P-A	P-B	A-T	B-T
A, B	2	2	-	-
C, D, Y, J	2	2	3	3
E, Q, V	2	2	4	4
F	2	3	3	5
G	3	3	4	6
H	1	1	4	5
LU	2	2	3	5
M	1	1	5	1
P	3	2	5	3
R	2	4	3	-
T	3	5	5	6
W	2	2	5	5

Switching power limits (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)


The given switching power limits are for applications with two flow directions (e.g. from P to A and simultaneous return flow from B to T).

Due to the flow forces active within the valves the permissible switching power limit may be significantly less if there is only one direction of flow (e.g. from P to A and port B blocked)!
(Please consult us for applications of this kind.)

The switching power limits were measured with the solenoids at operating temperature, 10% under voltage and without tank back pressure.

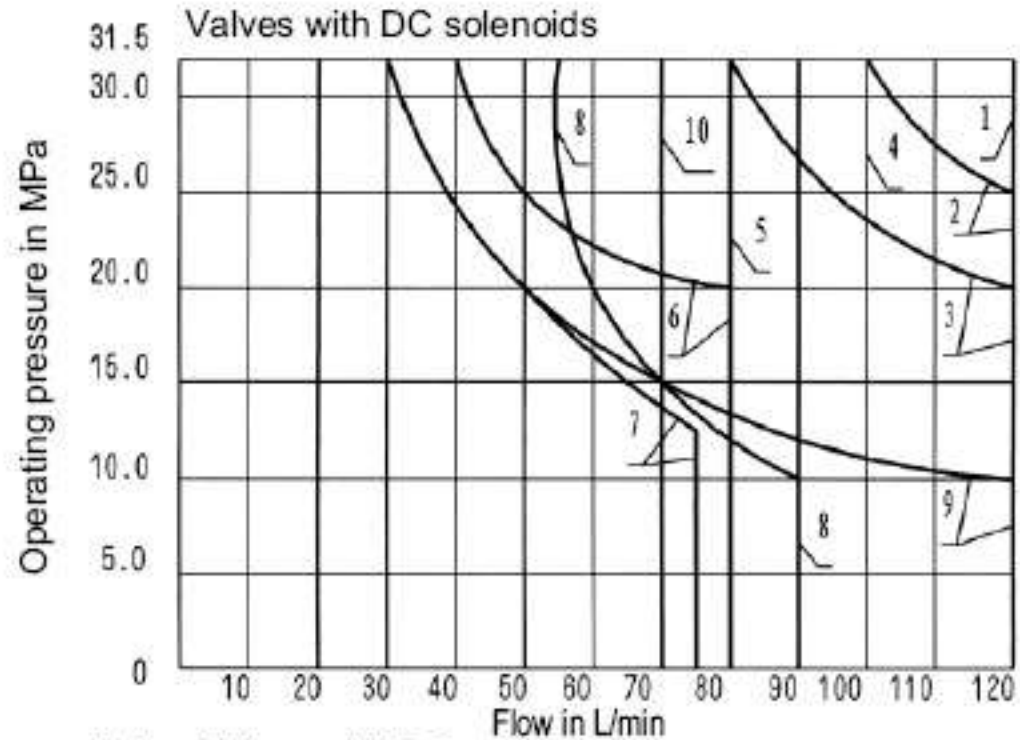


Curve	Symbols
1	C,D/O,C/O/F D,D/O,D/O/F Y,M
2	E
3	A/O,A/O/F L,U,J,Q,W
4	H
5 ¹⁾	R
6	G
7	T
8	F,P
9	A,B
10	V

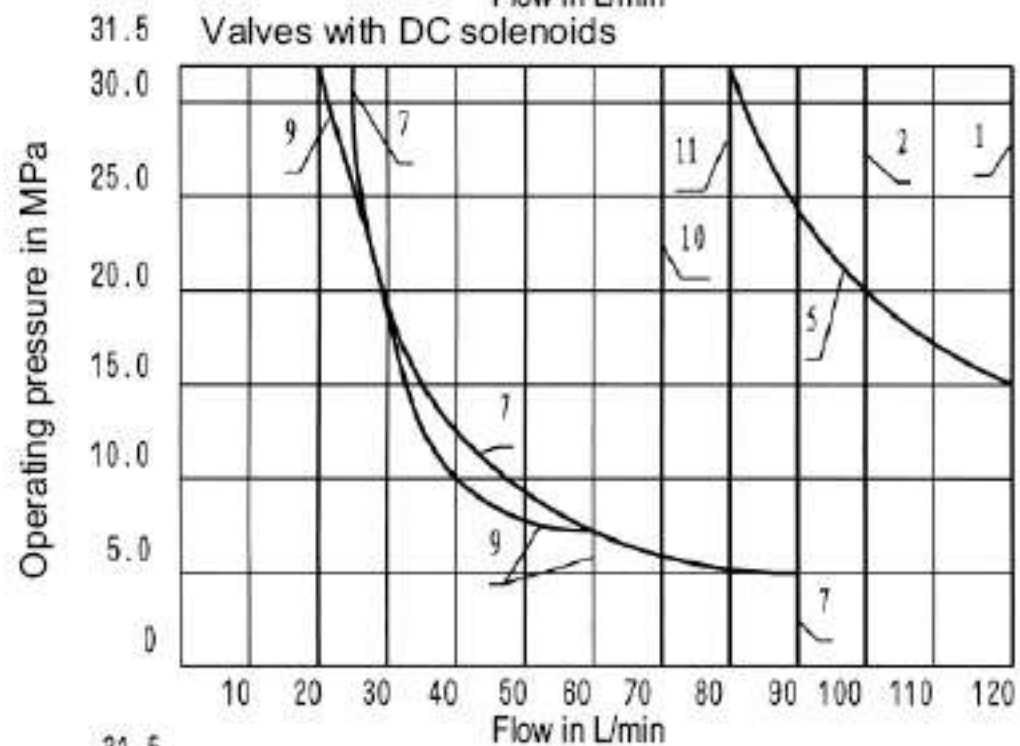


42V,50Hz;110V,50Hz;120V,60Hz;
127V,50Hz;220V,50Hz;240V,60Hz

Curve	Symbols
1	C,C/O,C/O/F D,D/O,D/O/F Y
2	E,L U,Q,W
3	M
4	A,B
5	A/O,A/O/F,J
6	G
7	F,P
8	V
9	T
10	H
11	R

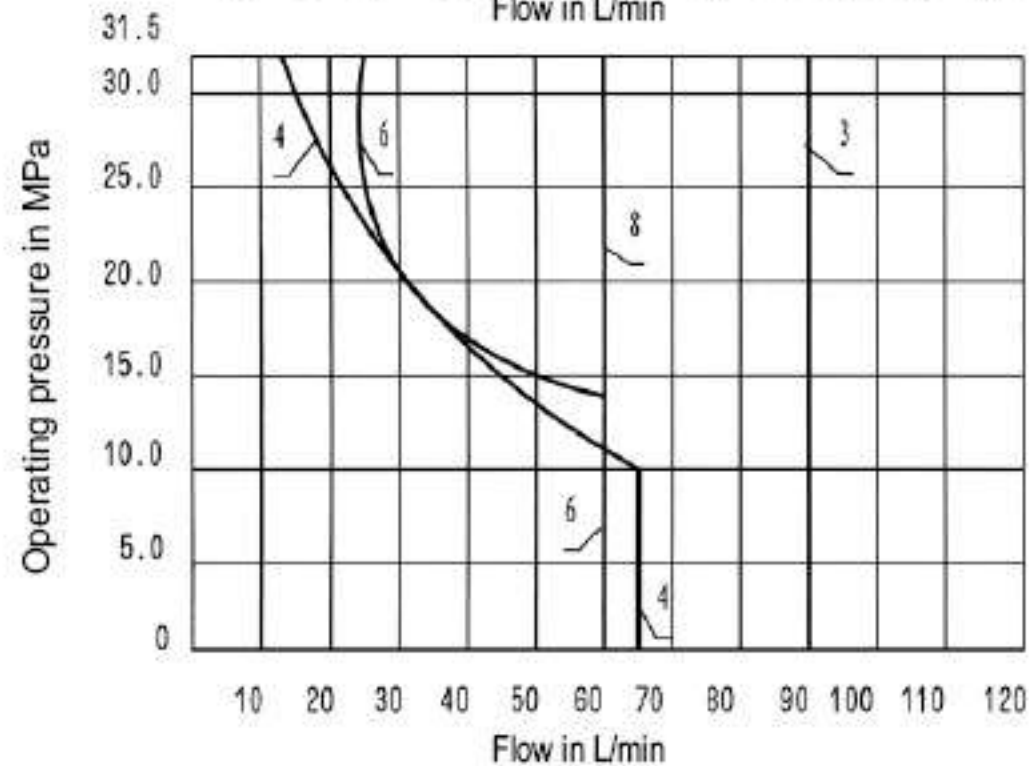

Switching power limits (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

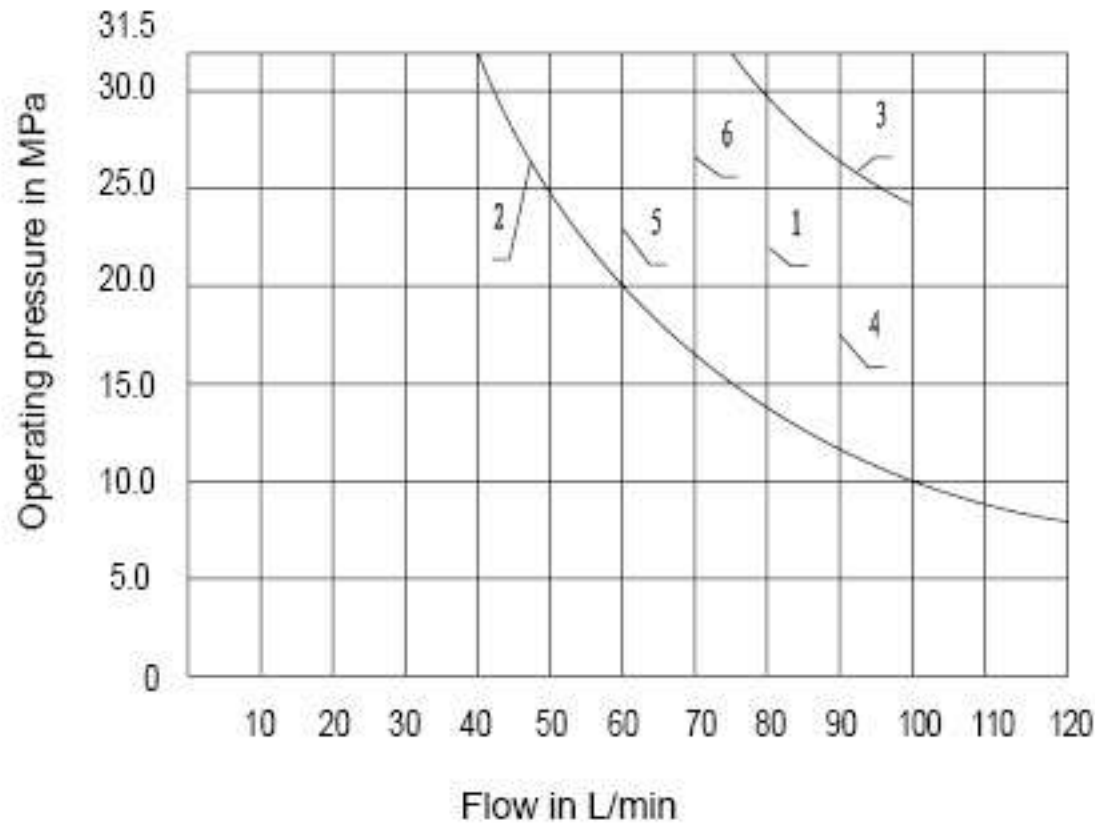

42V,60Hz,110V,60Hz 127V,60Hz,220V,60Hz	
Curve	Symbols
1	C,C/O,C/OF D,D/O,D/OF Y
2	A/O,A/OF
3	E
4	M
5	V
6	H
Switching power limits for other spools on enquiry!	


Technical data

Operating pressure max.	Ports A, B, P (MPa)	31.5
	Ports T (MPa)	16
Flow max.	(L/min)	120
Cross section (switching position 0):	With symbol Q approx. 6 % of the nominal area With symbol W approx. 3 %	
Pressure fluid	Mineral oils(for NBR seal) or phosphate ester(for FPM seal)	
Pressure fluid temperature range	(°C)	-30-- + 80
Viscosity range	(mm ² /s)	2.8~500
Weight (kg)	Valve with 1 solenoid	5.1(DC) 4.3(AC)
	Valve with 2 solenoids	6.7(DC) 5.1(AC)


For symbols A and B, port T must be used as a drain line, if the operating pressure is higher than the permissible tank pressure.

Unit dimensions with DC solenoids

Individual connection

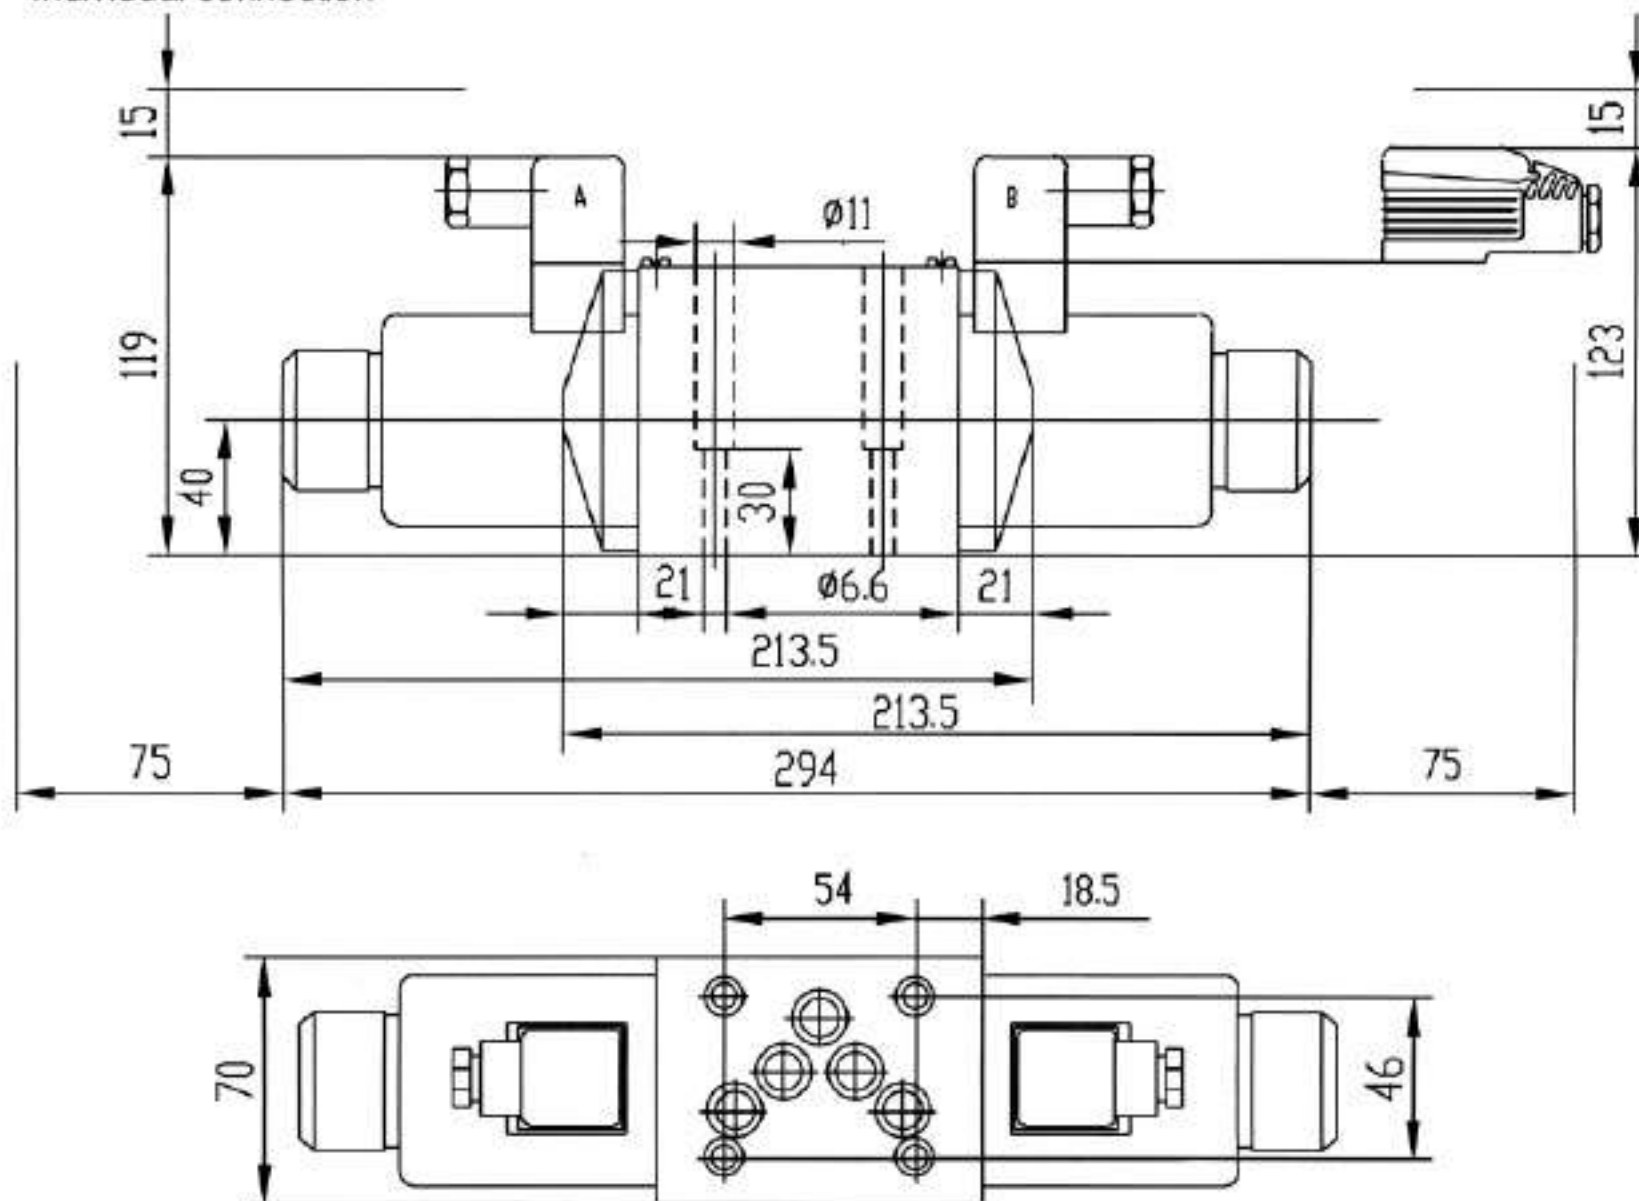

Central connection

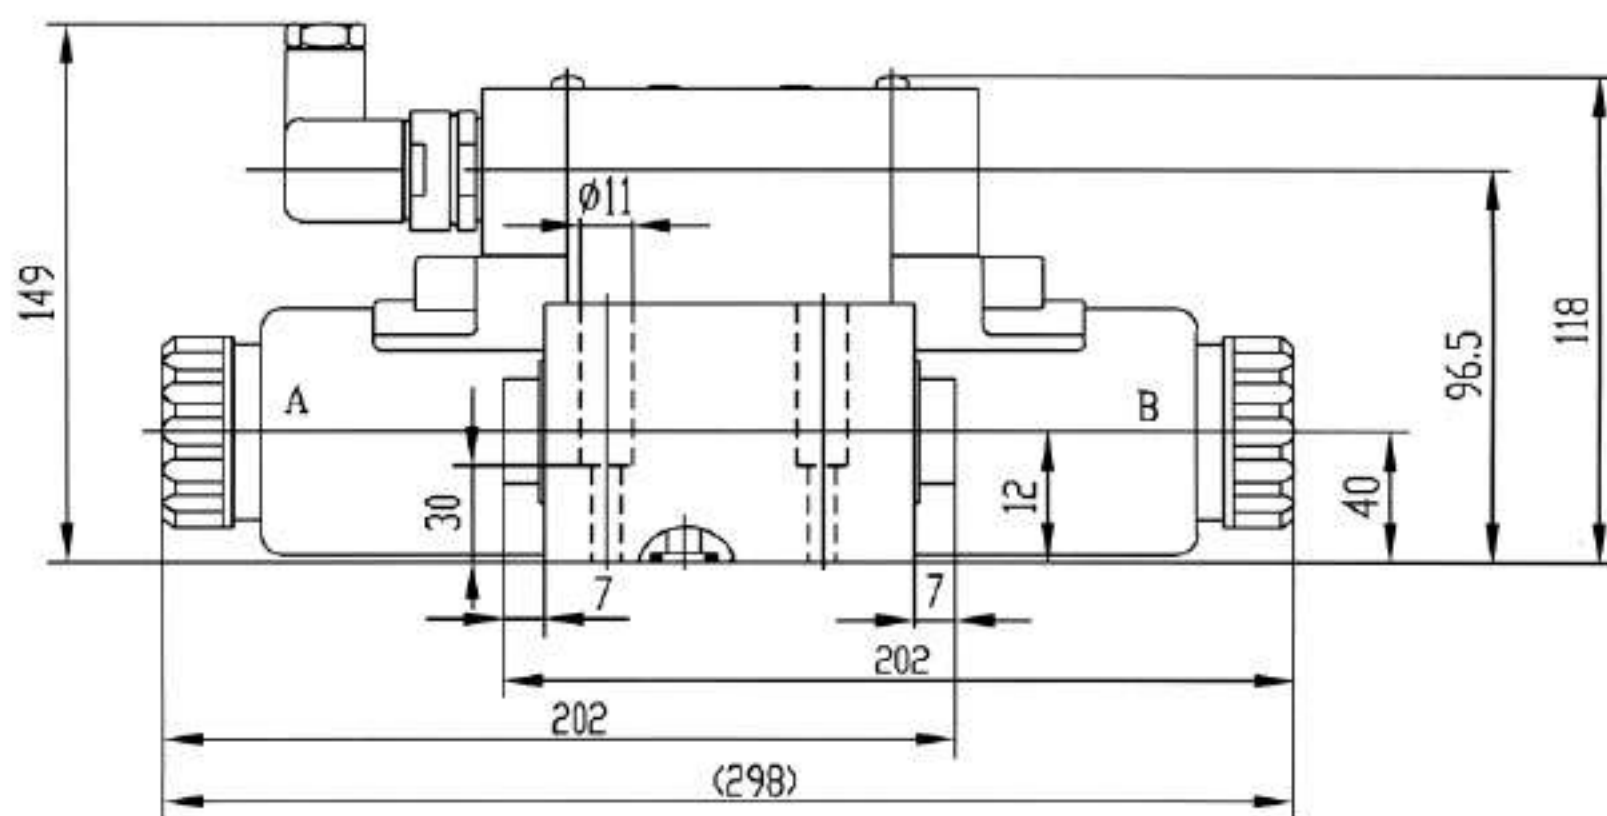

Valve fixing screws: 4-M6x40-10.9 (GB/T70.1-2000)

$M_A = 15\text{N.m}$


Subplate: G66/01(G3/8") G66/02(M18x1.5)

G67/01(G1/2") G67/02(M22x1.5)




G534/01(G3/4") G534/02(M22x1.5)

(see page 206)

Required surface finish of mating piece

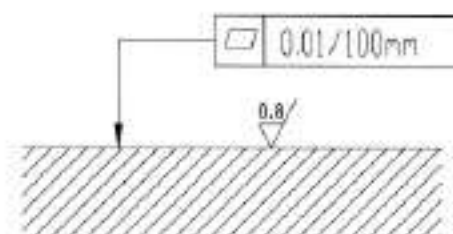

Unit dimensions with AC solenoids

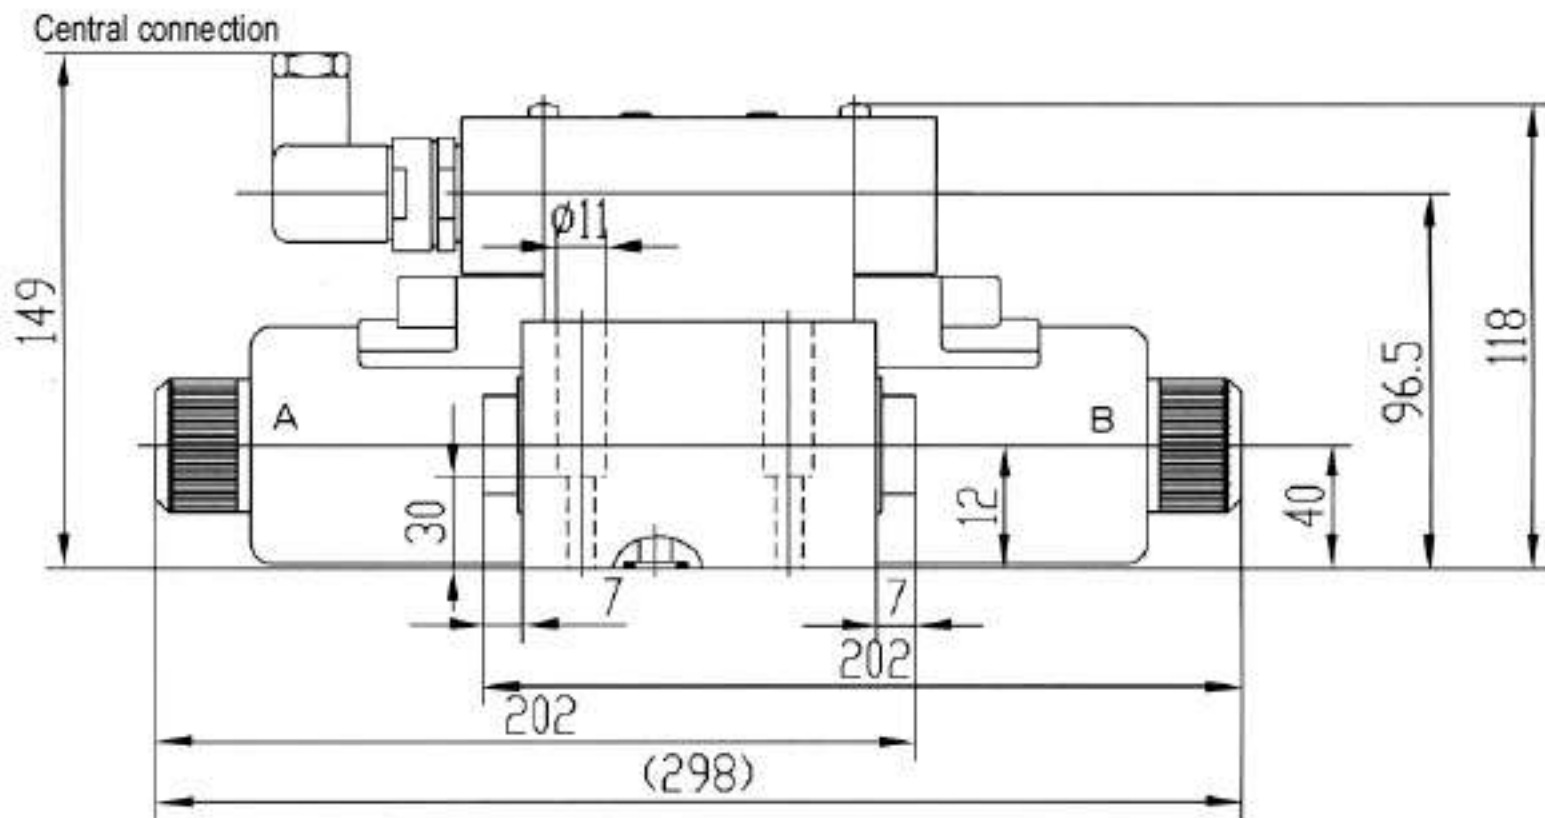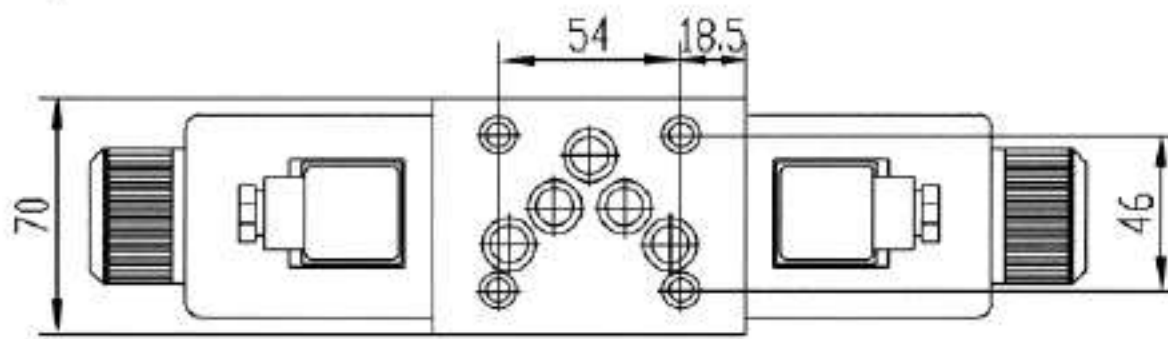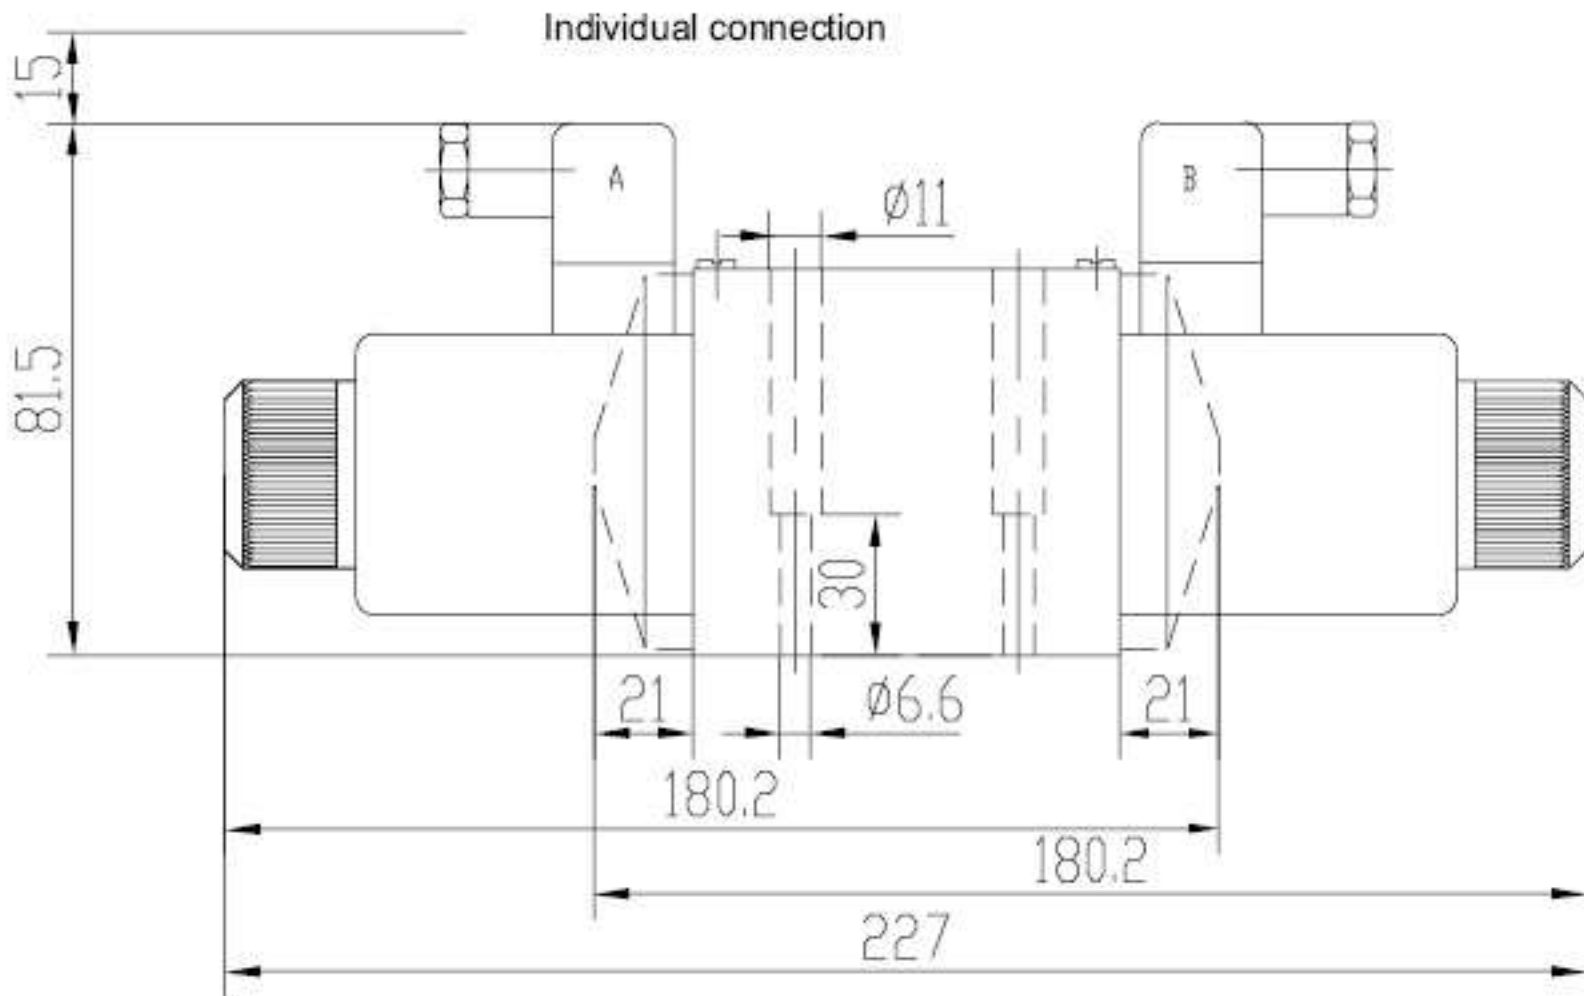

Valve fixing screws: 4-M6x40-10.9 (GB/T70.1-2000)

$M_A=15N.m$


Subplate: G66/01(G3/8 ") G66/02(M18x1.5)

G67/01(G1/2 ") G67/02(M22x1.5)

G534/01(G3/4 ") G534/02(M22x1.5)

(see page 206)

Required surface finish of mating piece

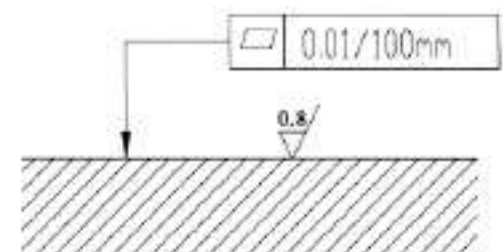

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.


BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	4/3-, 4/2- and 3/2- directional valves with switching time adjustment, Type 5-WE 10			RE 23320/12.2004
	Size 10	up to 31.5 MPa	up to 120 L/min	

Features:

- Direct solenoid actuated directional spool valve
- Wet pin DC solenoids with removable coil (AC voltages possible via a rectifier)
- Solenoid coil can be rotated through 90°
- The coil can be replaced without opening the pressure-tight chamber
- Individual electrical connections
- Hand override, optional
- Adjustable spool switching time, optional
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Function, section

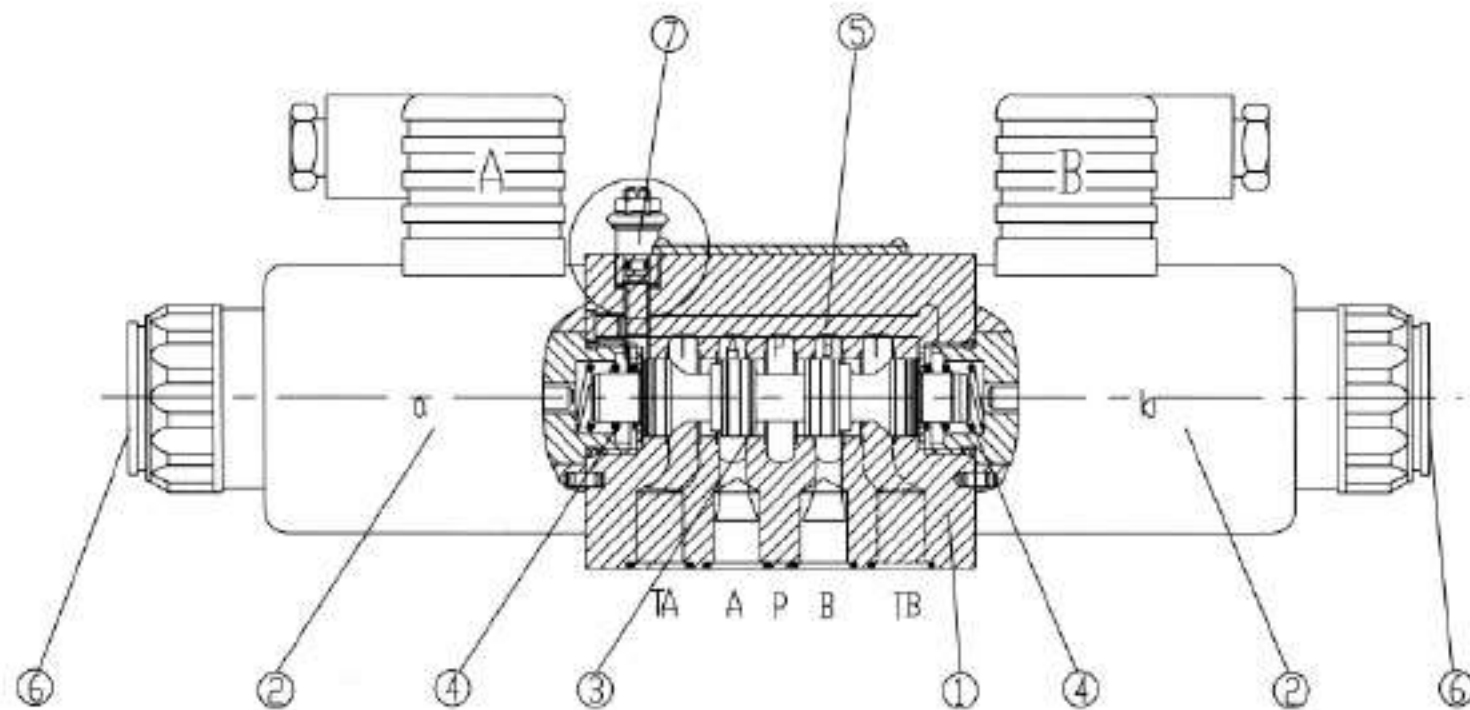

Type 5-4WE10J30B/...C...

5-chamber directional valves of type 5-WE are solenoid operated directional spool valves. They control the start, stop and direction of flow with the additional option of adjusting the spool switching time. These directional valves basically consist of the housing (1), one or two solenoids (2), the control spool (3), as well as one or two return springs (4). The two spring chamber are connected by a connecting bore (5). As the spool switches, the flow is displaced from one spring chamber to the other via this passage. If the area of this connecting bore is reduced by an orifice, the switching time changes accordingly. The T channels are isolated from the spring chambers. This means that switching pulses do not affect the control spool (3) and thus, soft switching of the spool can be achieved. In the de-energized condition, the control spool (3) is held in the central or initial position by return springs (4) (except for impulse spools). The control spool (3) is actuated by wet pin solenoids (2).

In order to ensure correct functioning, care must be taken to ensure that the pressure chamber of the solenoid is filled with oil.

The force of the solenoid (2) acts on the control spool (3) and switches it from its rest position to the required end position. This then permits flow from P to A and B to T or P to B and A to T. When the solenoid (2) is de-energized the control spool (3) is returned to its rest position by the return spring (4). A hand override (6), optional, enables the control spool (3) to be moved without energization of the solenoids.

Adjustable spool switching time (only with DC solenoids)
The optional installation of an orifice screw (7) or orifice (8) - see below - offers the possibility of increasing switching time

- with orifice screws type 5-WE 10 .../...CG../C...

- with throttle type 5-WE 10 .../...CG../A..

Funtion,secion

With the installation of orifices, the spool switching time may be lengthened by more than 100 ms. The actual time is dependent upon the individual system (e.g. pressure, flow and viscosity).

When retro-fitting or modifying a throttling system, care must be taken that the fluid volume in the spring chambers and the connecting bore (5) is retained, as this is a prerequisite for the smooth operation of the switching time adjustment.

Type 5-WE 10.30/OC....

(only possible with symbols A, C and D)

This version is a directional valve with 2 switched positions and 2 solenoids without detent. There is no defined spool position in the de-energized condition.

Type 5-WE 10.30/OFC... (impulse spool), with detent


(only possible with symbols A, C and D)

This version is a directional valve with 2 detented switched positions and 2 solenoids. Thus, the spool is held in the last switched position, permanent energisation of the solenoid is not required.

Throttle insert (type 5-WE 10.30/.../B..)


The use of a throttle insert is required if, due to the operating conditions, flows can occur during the switching process which are larger than the performance limits of the valve allow.

The orifice is to be inserted into the P channel of the directional valve.

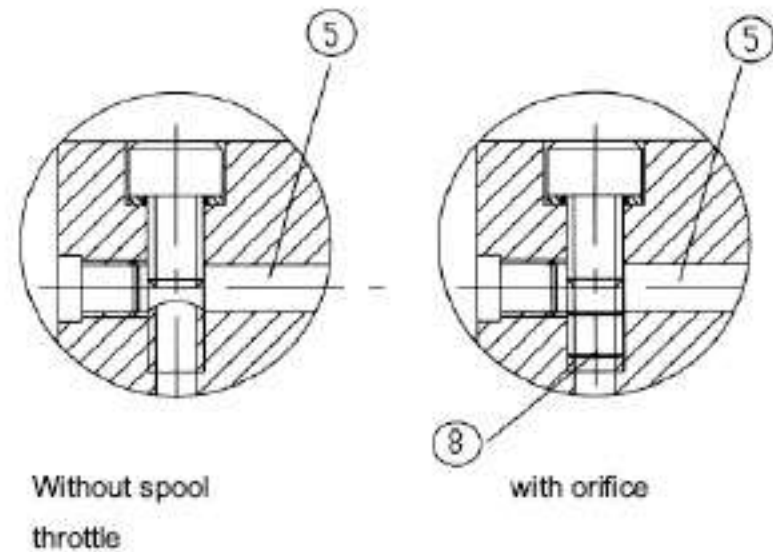


Without spool throttle


with orifice



Throttle insert




With detent



With throttle screw (without throttle bore)

Symbols

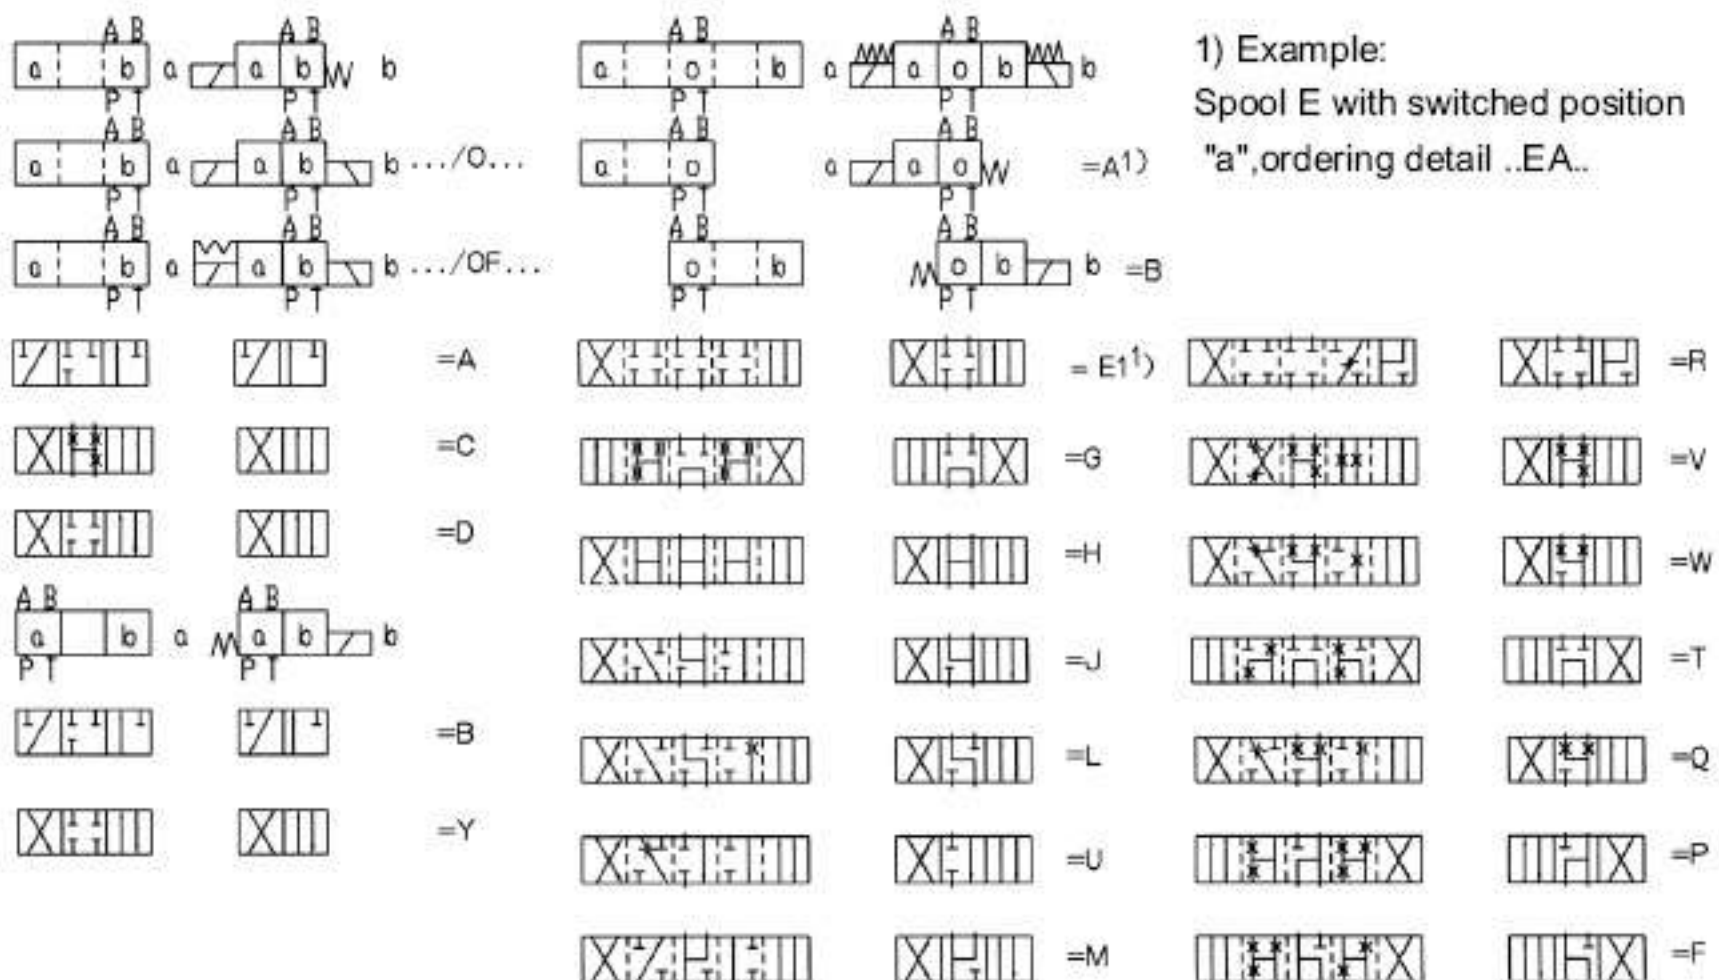

Ordering details

5- WE 10 31 B / / *

3 service ports = 3
4 service ports = 4

Nominal size 10 = 10

Symbol e.g. C, E, EA, EB etc.
- for possible versions, see sheet below

Series 30 to 39 = 31
(30 to 39: unchanged installation and connection dimensions)

Technology of Beijing Huade Hydraulic = B

With spring return = No code
Without spring return with detent = OF
Without spring return = O

Wet pin solenoid (oil immersed) with removable coil = C

24VDC = G24
220VAC, 50Hz or 240VAC, 60Hz = W220
DC solenoid commuting automatically = W220R

With protected manual override (standard) = N9
Without hand override = No code
Hand override with protective cap = N

DC (permissible voltage $\pm 10\%$)	Standard voltage of DC electromagnet when use AC power connector	Order details
110V - 50/60Hz	98V	G98
120V - 60Hz		
230V - 50/60Hz	205V	G205

Further details
in clear text

No code = mineral oils
V = phosphate ester

No code= Without cartridge throttle
B08 = Throttle Φ 0.8 mm
B10= Throttle Φ 1.0 mm
B12= Throttle Φ 1.2 mm
B15= Throttle Φ 1.5 mm
B30= Throttle Φ 3.0 mm

No code = without spool throttle
C= With throttle screw
A06= Orifice Φ 0.6 mm
A07= Orifice Φ 0.7 mm
A08= Orifice Φ 0.8 mm
A10= Orifice Φ 1.0 mm

individual connection



Z4 = normal plug to DIN43850

Z5 = large right-angle plug
(rectifier can be selected)

Z5L = large right-angle plug with indicator light

- 1) Plug-in connector must be ordered separately (see table below).
- 2) It is necessary to go through DC electromagnet controlled by rectifier when using AC power connector.
- 3) For individual connections, may use large plug with rectifier (Order separately ,see table below for order details)

Ordering details: plug(individual connection)

		DIN43850-Plug to DIN43850 ISO 4400	large plug 			
			without indicator light	with indicator light	without indicator light	with indicator light and inhibitory circuits
valve side a colour:grey	Order symbol	074 8830	08 616	313 923/24V 313 926/180-240V	313313 932	310 994
valve side a colour:black		074 884	009 129	313928/24V 313 931/180-240V	313 933	310 995

Technical data (For applications outside these parameters, please consult us!)

General

Installation		optional
Max. ambient temperature	(°C)	-30~+50
Weight	Valve with 1 solenoid	(kg) 5.1(DC) ; 4.3(AC)
	Valve with 2 solenoids	(kg) 6.7(DC) ; 5.1(AC)


Hydraulic data

Max. operating pressure	Ports A, B, P	(MPa)	31.5
	Ports T	(MPa)	21 (DC) ; 16 (AC)
Flow area	with symbols A and B, port T must be used as drain port, if the operating pressure is higher than the permissible tank pressure.		
Max. flow	(L/min)	120	
Pressure fluid	mineral oils or phosphate ester		
Fluid temperature range	(°C)	- 30 to + 80	
Viscosity range	(mm ² /s)	2.8 – 500	
Degree of contamination	We, therefore, recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.		
Flow cross-section (switched position 0)	For symbol V	(mm ²)	11 of nominal cross section (A/B → T), 10.3 of nominal cross section (P → A/B)
	For symbol W	(mm ²)	2.5 of nominal cross section (A/B → T)
	For symbol Q	(mm ²)	5.5 of nominal cross section (A/B → T)

Electrical data

Type of voltage	DC		AC	
Available voltages (See below when ordering AC solenoids)	12, 24, 42, 60, 96, 110, 180, 205, 220		42, 110, 220, 230, 240	
Power consumption (W)	35		50/60Hz	
Holding power (VA)	-		90	
Switching power (VA)	-		550	
Duty continuous	Continuous		Continuous	
Switching time to ISO 6403	ON	(ms)	45 to 60	15 to 25
	OFF	(ms)	20 to 30	20 to 30
Switching frequency (cycles/h)	15000		7200	
Protection to DIN 40 050	IP65			
Insulation class VDE 0580	F		H	
Max. coil temperature (°C)	150		180	

1) special voltages on request

When connecting the electrics, the protective conductor (PE ) must be connected according to the relevant regulations.

Note:

These solenoids may be used for 2 types of supply:

e.g. solenoid type W110 for:


110V, 50Hz

120V, 60Hz

Order Type	W42	42V, 50Hz
		42V, 60Hz
	W110	110V, 50Hz
		120V, 60Hz

Order Type	W230	230V, 50Hz
		230V, 60Hz
	W220	220V, 50Hz
		220V, 60Hz

Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

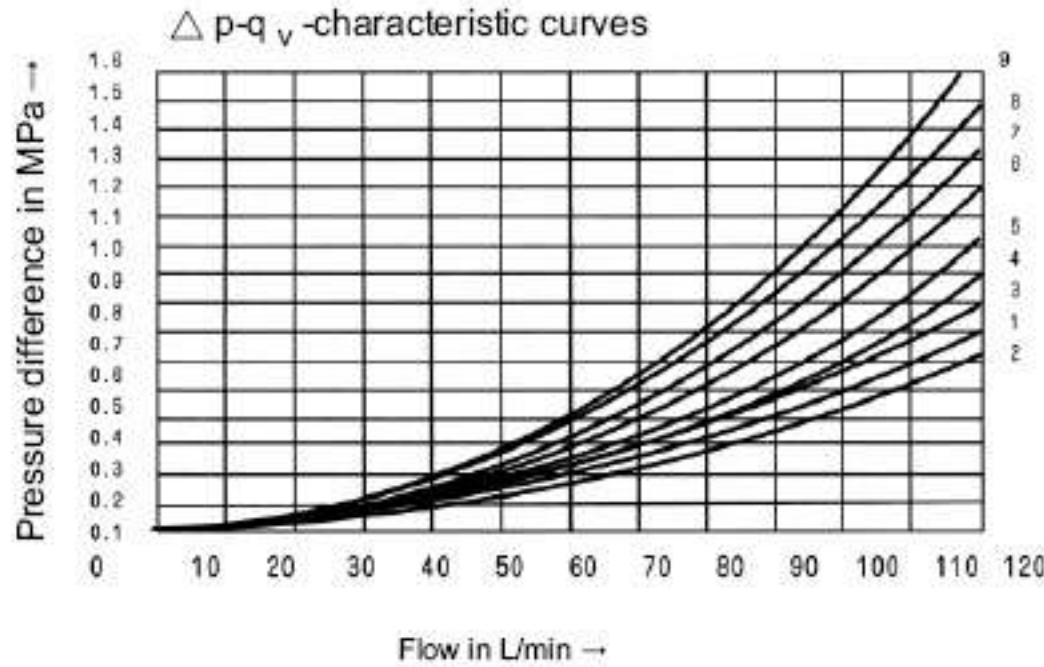

Symbols	Direction of flow			
	P-A	P-B	A-T	B-T
AB	1	1	-	-
D,Y	2	2	1	3
E	2	2	3	4
F	2	1	4	7
G	4	4	6	8
H	2	2	1	3
J,L	1	1	4	4
M	2	2	3	4
P	2	1	1	7
Q,V	1	1	3	4
R	1	4	3	-
T	4	4	5	7
U	11	1	3	5
Centr. position		B-T	A-T	P-T
F	-	-	5	4
G	-	-	-	8
P	-	7	-	6
T	-	-	-	8
Choice. position		B-A		
R		9		-


Performance limits: (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

The performance limits shown are valid when the valve is used with two directions of flow (e.g. from P to A with simultaneous return flow from B to T).


Due to the flow forces occurring within the valves, the permissible switching performance limits can be significantly lower with only one direction of

flow (e.g. from P to A and with port B blocked)! (For these applications, please consult us.)

The performance limits were determined with the solenoid at operating temperature, 10% under voltage and with no preloading of the tank.

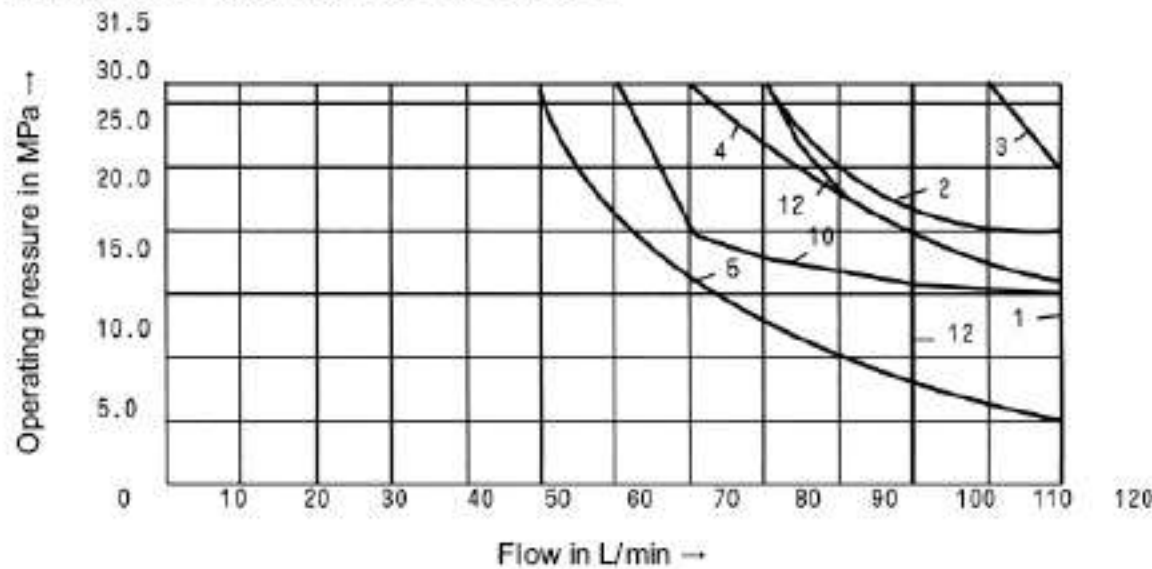


Char. curve	Symbols
With orifice $\phi 0.6 \text{ mm}$ (*A06)	
3	D,Y
12	C
With or without orifice	
1	C/O,C/O/F
	D/O,D/O/F,M
2	A/O,A/O/F,E
	J,L,U,Q,W
4	G
5	F,P
10	H

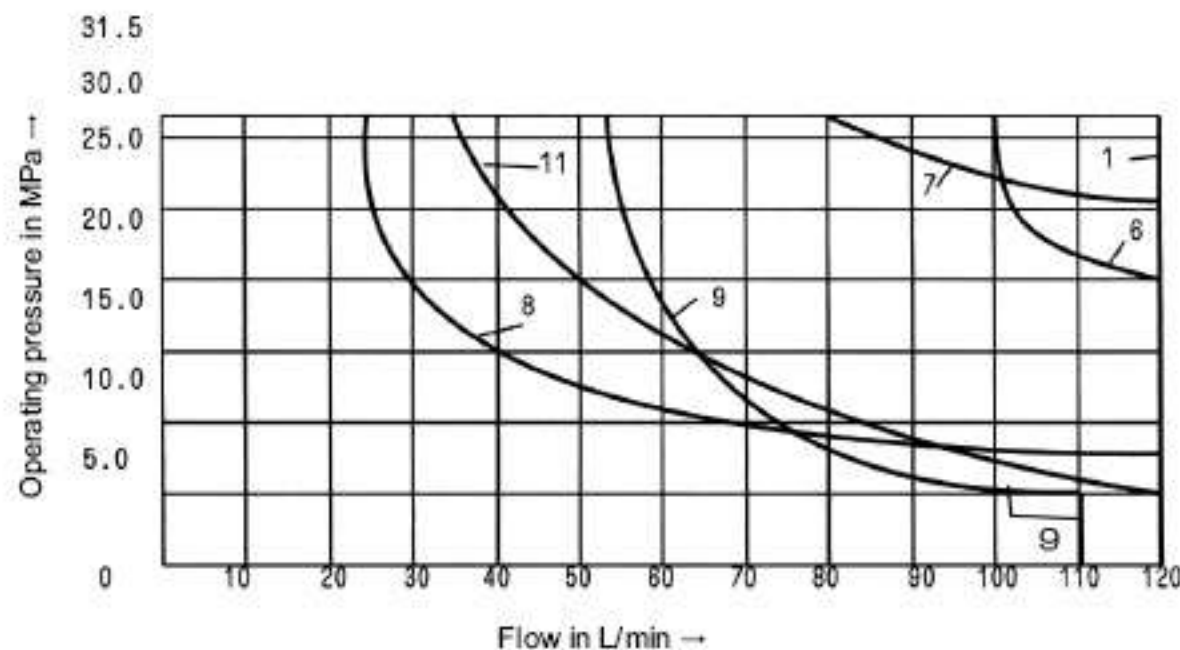


Char. curve	Symbols
Without orifice	
1	D,Y
6	C
7	R
8	T
9	V
11	AB


Individual connections

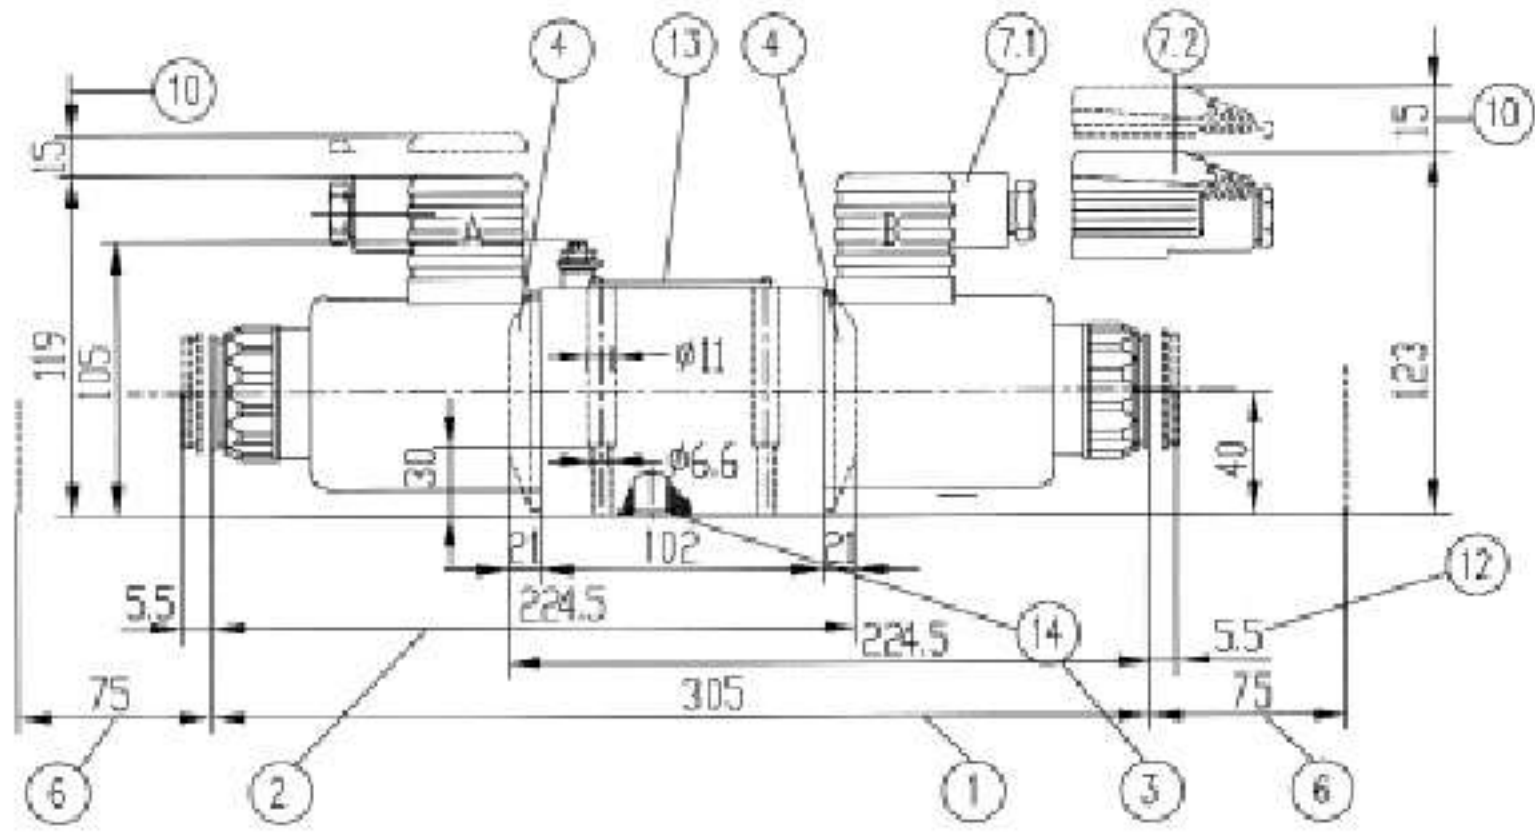

Central connection

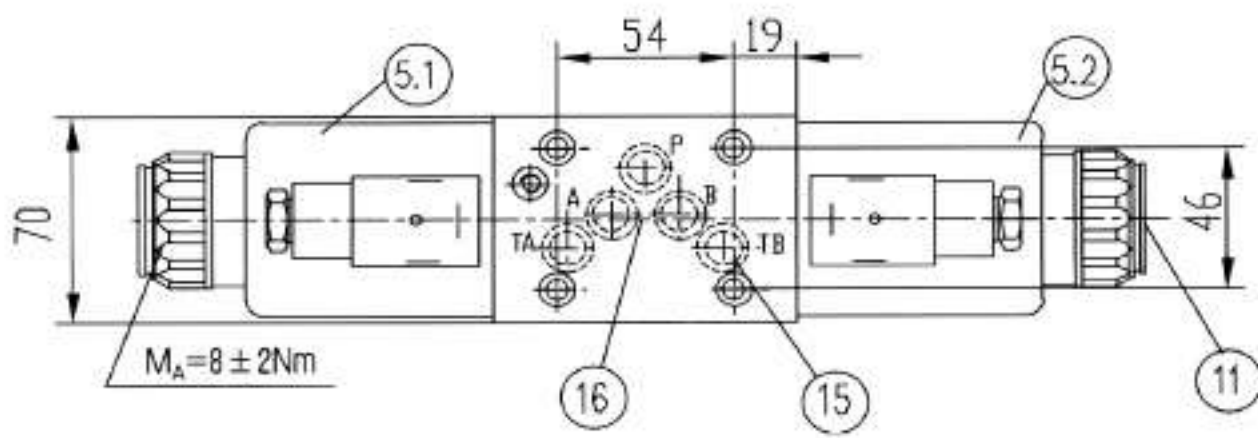

Required surface finish of mating piece

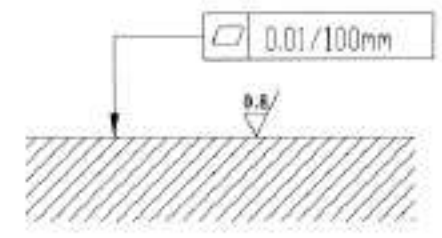

- 1 3-Position valve
- 2 2-Position valve
With 1 solenoid (A, C, D, EA...)
- 3 2-Position valve
With 1 solenoid (B, Y, EB...)
- 4 Plug for valve with 1 solenoid
- 5.1 Solenoid "a" (Plug-in-connector colour grey)
- 5.2 solenoid "b" (Plug-in-connector colour black)
- 6 Spece required to remove solenoid
- 7.1 Plug-in connector (may be rotated by 90°)
- 7.2 Plug-in connector of large code (may be rotated by 90°)
- 10 Spece required to remove plug in connection (A, C, D, EA...)

- 11 Hand override "N9"
- 12 Dimension of hand override "N"
- 13 Namplate
- 14 O-rings 12X2
- 15 Additional T port (TB) may optionally be used in conjunction with drilled blocks
- 16 Porting pattern to Din 24340 form A
ISO44101 and CETOP-RP121H
Subplates:
C66/01(G3/8)
C67/01(G1/2)
G534/04(G3/4)
Valve fixing screws
M6X40DIN912-10.9
(GB/T70.1-2000)
 $M_A = 15.5Nm$
must be ordered separately (see page 206)

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional control valves, hydraulically operated Type WH			RE22282/12.2004
	Size 6, 10	up to 31.5 MPa	up to 120L/min	Replaces: RE22282/05.2001

Features:

- Direct operated directional spool valve
- Two position valve with stroke limit optional
- Subplate mounting
- Mounting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Function,section

WH valves are hydraulic operated directional spool valves. They are used for the control of stop, start and direction of a flow.

The directional valves mainly consist of housing (1), one or two operating elements (2) (hydraulically, pneumatically operating cylinder), the control spool (3), as well as one or two return springs (4).

At rest the control spool (3) is kept in the centre or starting position by the return springs (3) (except impulse valve).

The control spool (3) is pushed into the required switching position by the operating elements.

With detent, type ..OF/..

Hydraulically or pneumatically operated directional valves are also available as 2-position valves with detent (5). When the operating elements with detent are used every switching position may be locked.


Without return spring, without detent, type ..O/..

When using operating elements without return spring and without detent there is no defined switching position at rest.


Cartridge throttle

The use of a cartridge throttle throttle is then necessary when during the switching procedures in the given operating conditions flows occur which exceed the performance limits of the valve.

It is plugged into the P-channel of the directional valve.

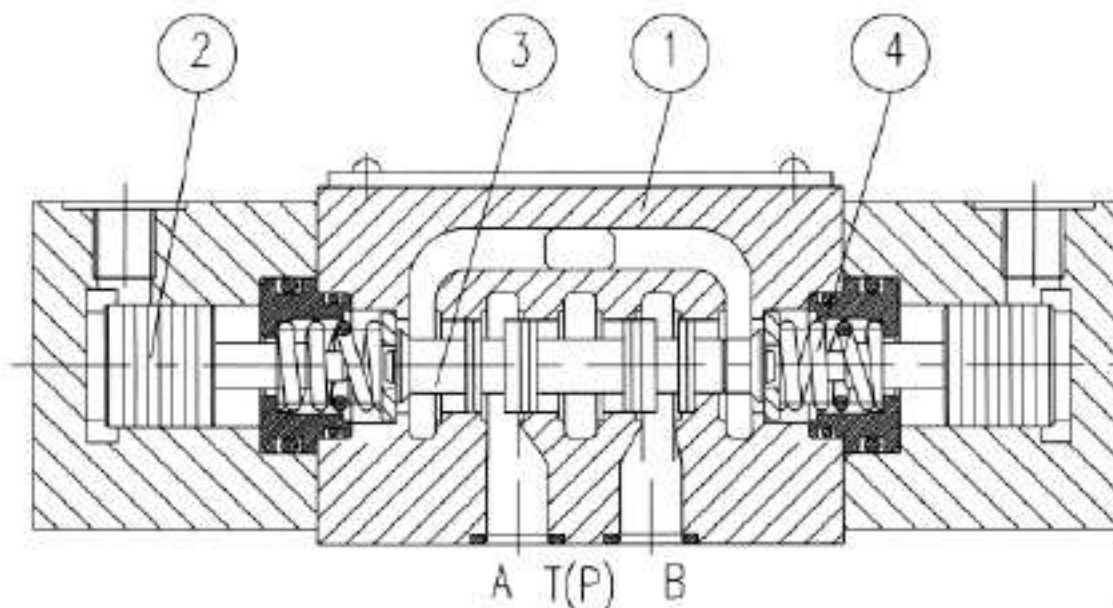

Type 4WH6...

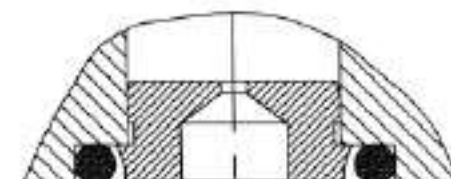

Cartridge throttle

Ordering code



3 service ports = 3
4 service ports = 4

Size 6 = 6
Size 10 = 10

Further details in clear text



No code = mineral oils
V = phosphate ester

No code = without plug-in throttle
B08 = Throttle Φ 0,8 mm
B10 = Throttle Φ 1,0 mm
B12 = Throttle Φ 1,2 mm

No code = with spring return
O = without spring return
OF = without spring return, with detent

B = Technology of BeiJing Huade Hydraulic

50 = Series 50(50 to 59: unchanged installation and connection dimensions)(only Size 6)
30 = Size 30(30 to 39: unchanged installation and connection dimensions) (only size 10)

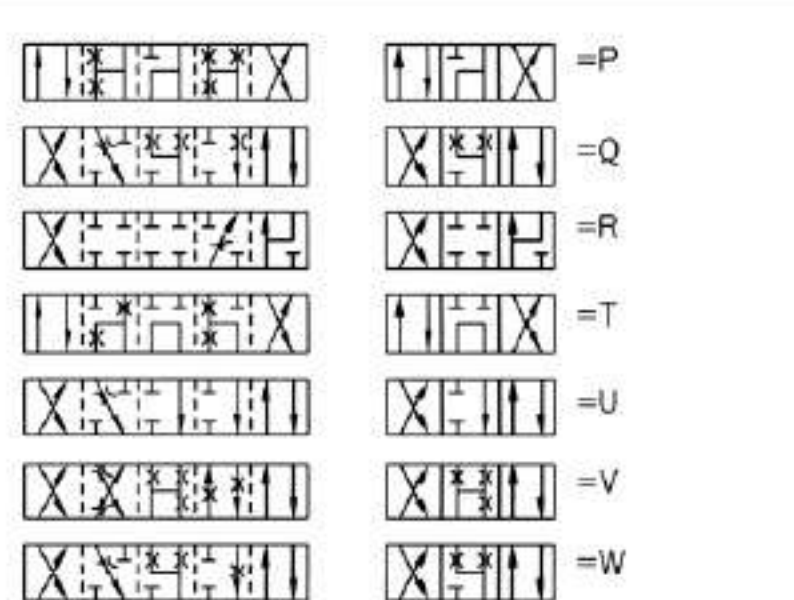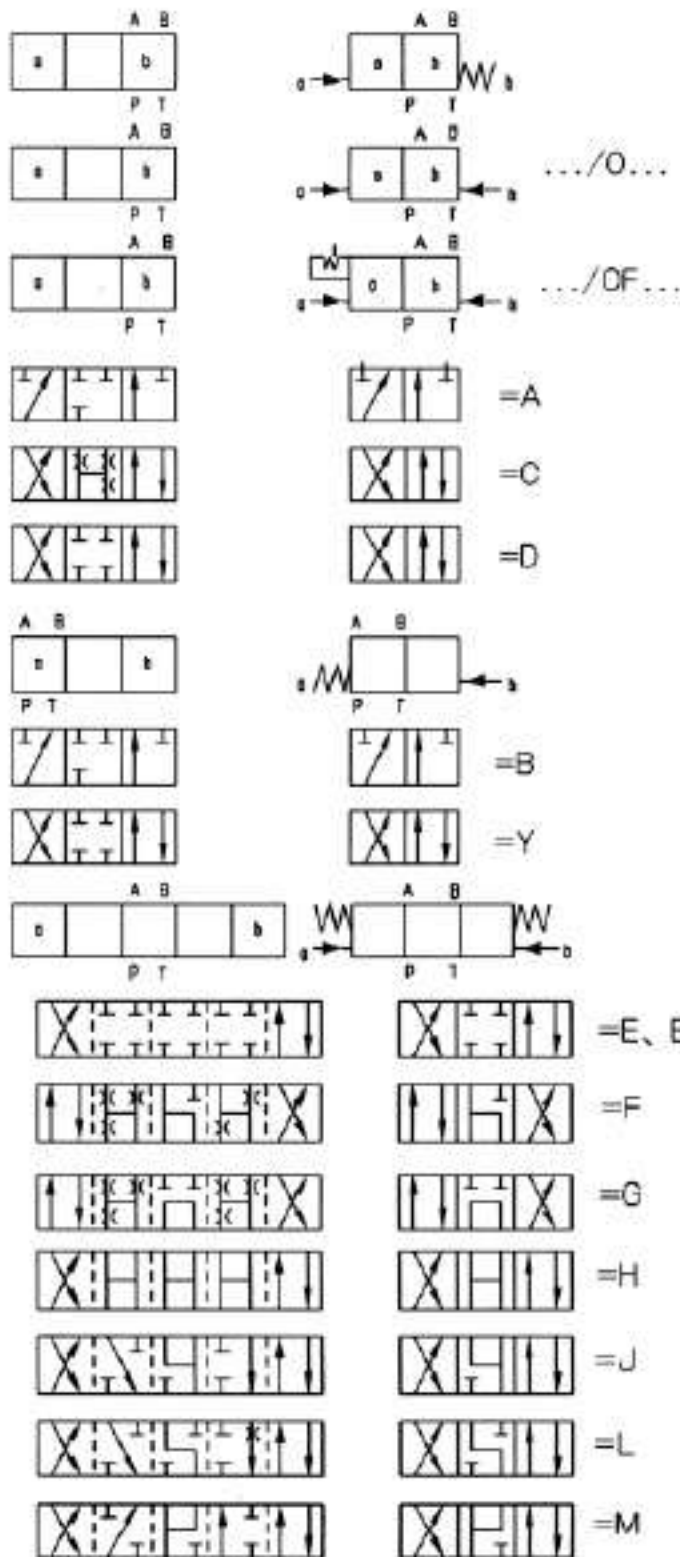

Example:

Spool E in switching position "a", ordering code ..EA..


Spool E in switching position "b", ordering code ..EB..

1) Symbol E1: P → A/B, pre-opening(only for size 6)

Technical data

Size		6	10
Max. operating pressure	Ports A, B, P (MPa)	to 31.5	
	Port T (MPa)	to 16	
With symbols A and B, port T must be used as a leakage port if the operating pressure is greater than 16.0 MPa.			
Flow max.	(L/min)	up to 60	up to 120
Operating to flow (Spool position 0)		Symbol Q, 6% of nominal cross-sectional area	
		Symbol W, 3% of nominal cross-sectional area	
Fluid		Mineral oil or phosphate ester	
Fluid temperature range	(°C)	-20 to +80	
Viscosity range	(mm ² /s)	2.8 to 500	
Weight (kg)	1 operating cylinder	approx.2	approx.3.5
	2 operating cylinder	approx.2.2	approx.4.5
Pilot pressure (MPa)	min.	0.6 to 1 > tank pressure	0.5
	max.	20	6


Operating curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

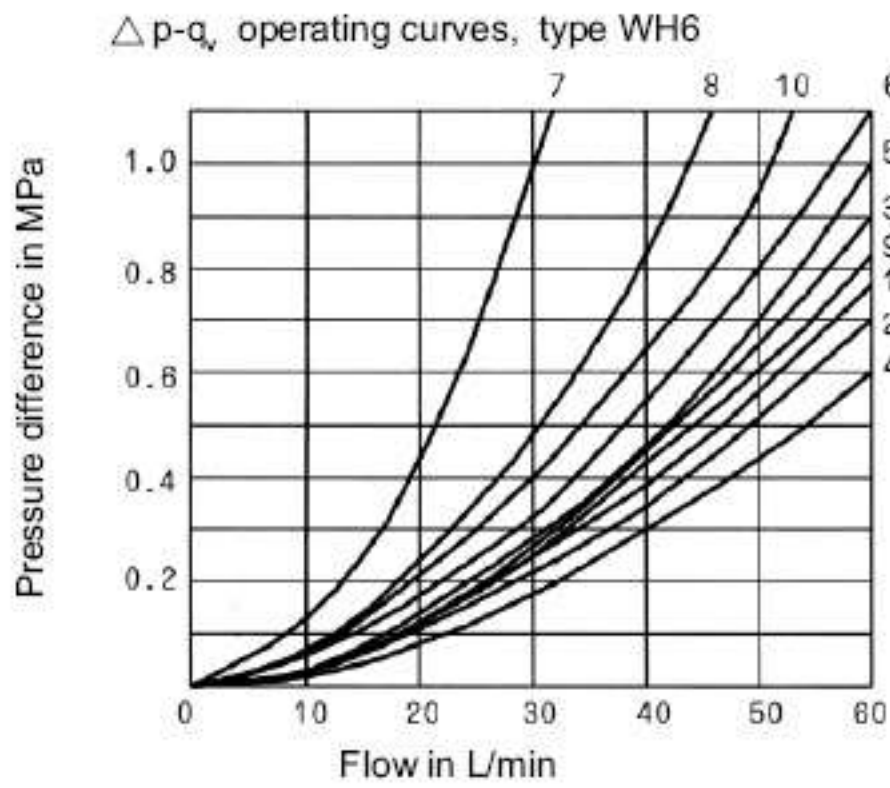

Symbol	Flow direction			
	P → A	P → B	A → T	B → T
A	3	3	-	-
B	3	3	-	-
C	1	1	3	1
D	5	5	3	3
E	3	3	1	1
F	1	3	1	1
G	6	6	9	9
H	2	4	2	2
J	1	1	2	1
L	3	3	4	9
M	2	4	3	3
P	3	1	1	1
Q	1	1	2	1
R	5	5	4	-
T	10	10	9	9
U	3	3	9	4
V	1	2	1	1
W	1	1	2	2
Y	5	5	3	3

7.Symbol "R" in switching position A → B

8.Symbol "G" and "T" in neutral position P → T

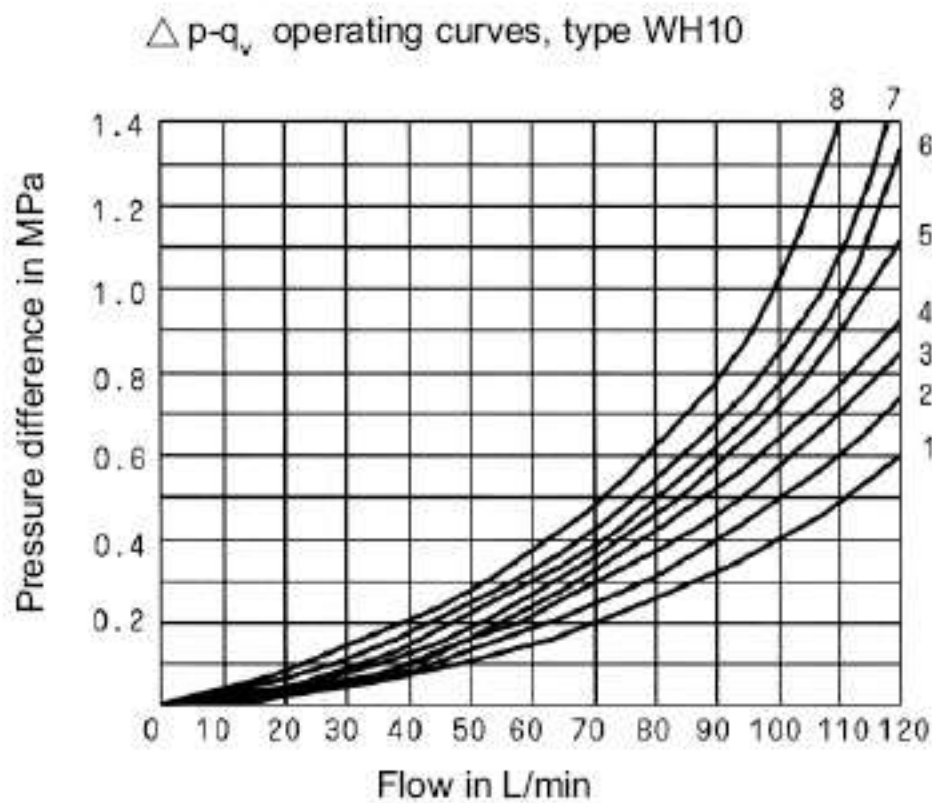

Symbol	Flow direction			
	P → A	P → B	A → T	B → T
A	4	3	-	-
B	3	4	-	-
C	3	3	4	4
D	3	3	5	5
Y	4	4	6	6
E	2	2	4	4
F	1	2	3	4
G, T	4	4	7	7
H	1	1	5	5
J	2	2	3	3
L	3	3	2	4
M	1	1	4	4
P	3	1	5	5
Q	2	2	2	2
L	3	4	3	-
U	3	3	5	2
V	2	2	3	3
W	3	3	3	3

7.Symbol "R" in switching position A → B

8.Symbol "G" and "T" in neutral position P → T

Performance limits:

The function of the valves is dependent on the filtering due to the sticking effect. In order to achieve the given permissible flow.

Values a full flow volume filtration rate of 20µm is recommended.




The flow forces effective inside the valves also influence the flow performance.

With 4-way valves the given flow data is therefore valid for the normal use with 2 flow directions (e.g. from P to A and at the same time return flow from B to T) (see table).

If only one flow direction is available the permissible flow may be much lower in critical cases (e.g. when using a 4-way directional valve with blocked port A or B as 3-way directional valve).


Type WH6

Control pressure 0.6 Mpa > T-pressure			Control pressure 1 Mpa > T-pressure		
Operating curve	Symbol		Spring return	Symbol	
Spring return	1	A, B	Spring return	1	A, B
	2	C, D, Y		8	C, D, Y, E, G
	3	E, J, L, U, M		1	H, J, L, U, M
	4	Q, V, W, E		9	Q, V, W, E1
	5	F, P		10	F, P
	7	T		11	R
	8	A, C, D		8	A, C, D

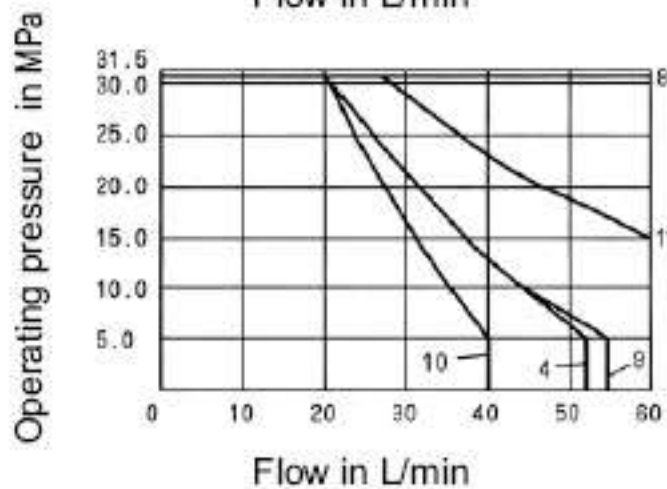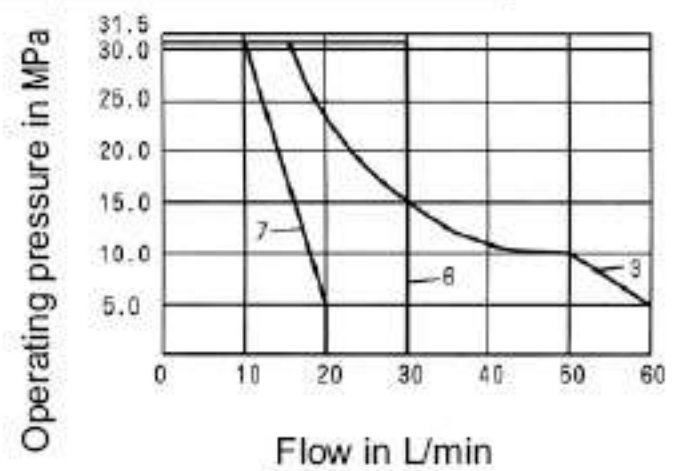
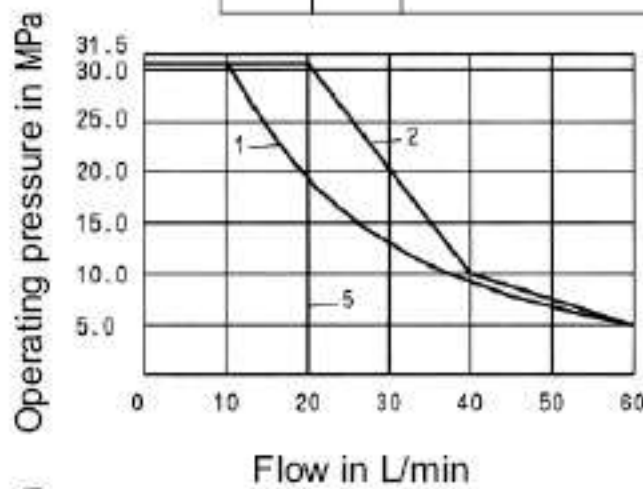


Type WH10


curves	symbols
1	A, B
2	A/O
3	H
4	F, G, P, R, T
5	J, L, Q, U, W
6	C, D, E, M, V, Y
7	CV/O, C/O, D/O, D/O

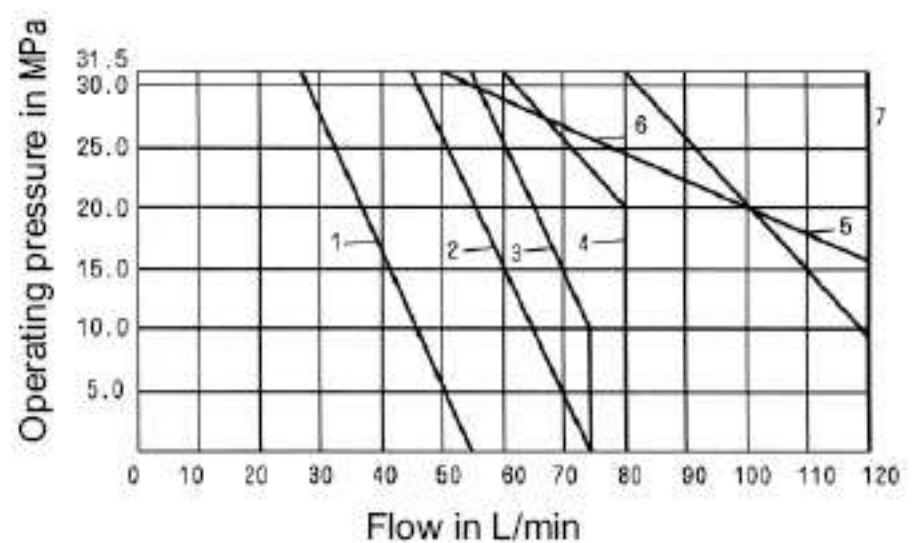


Type WH6

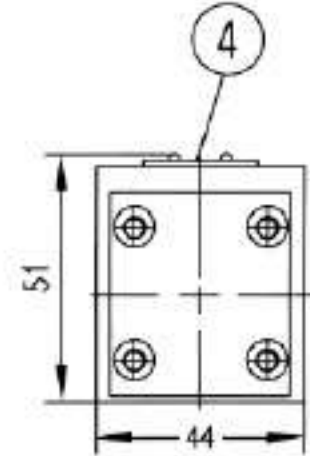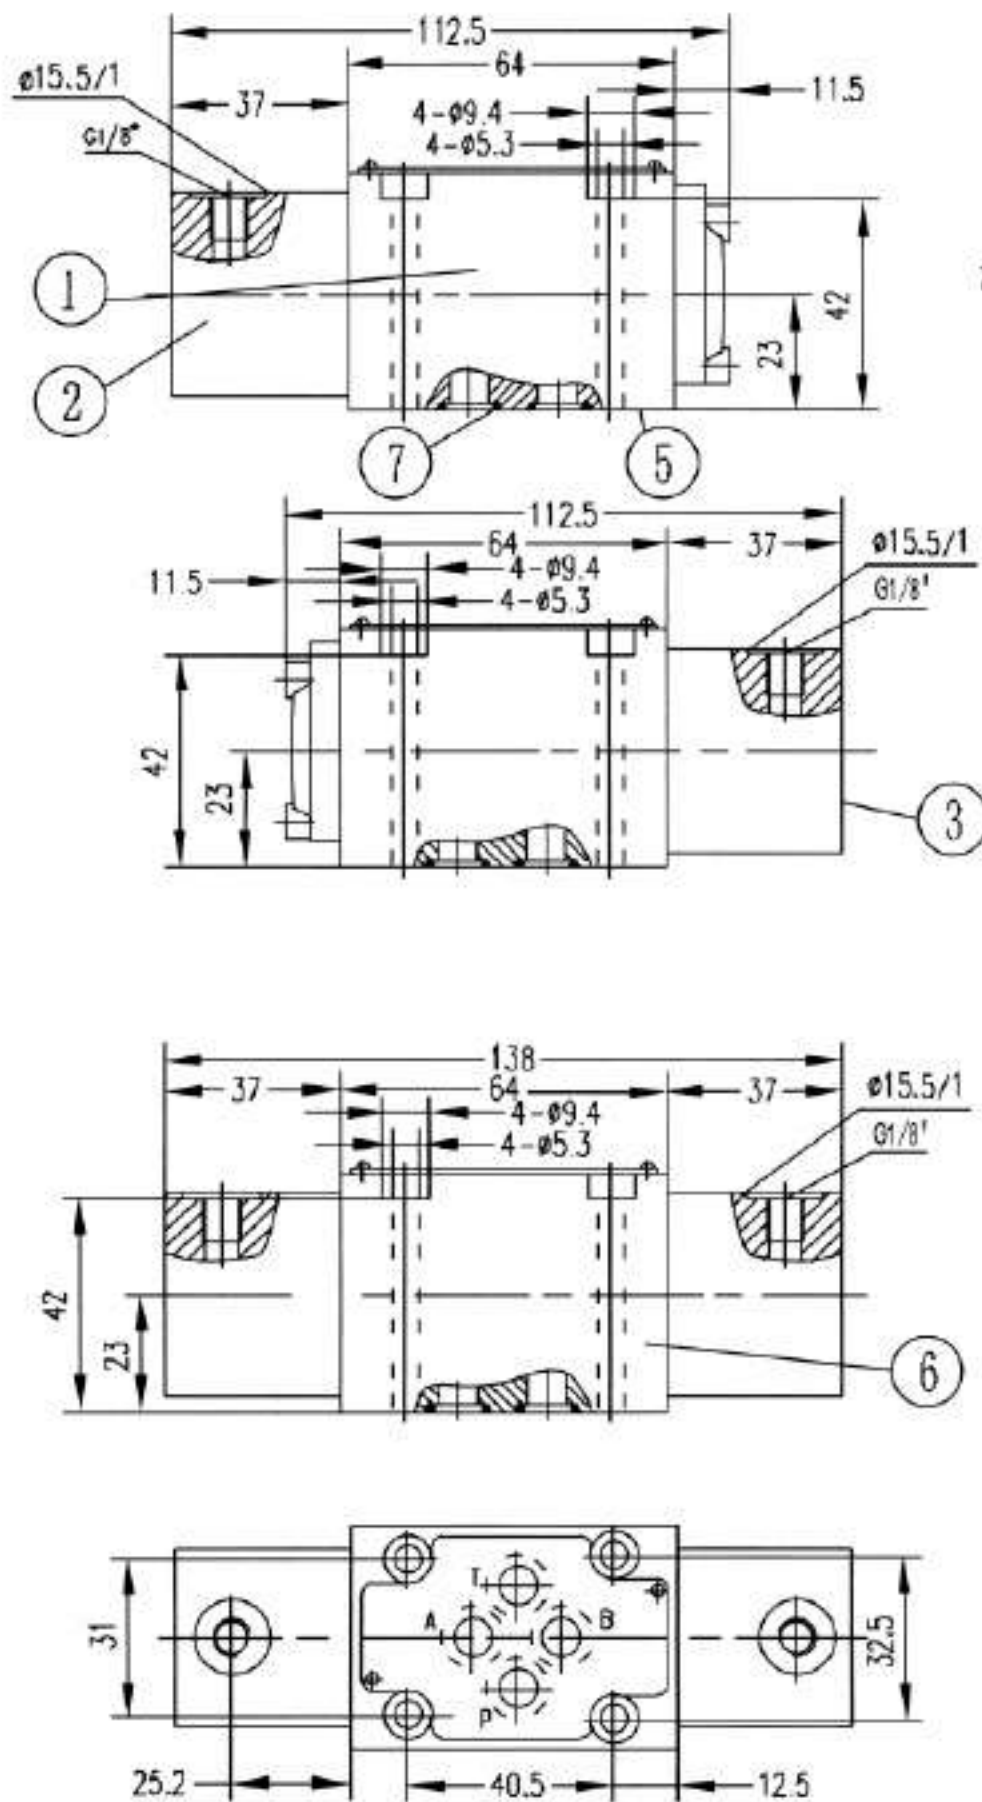

Required surface finish of mating piece

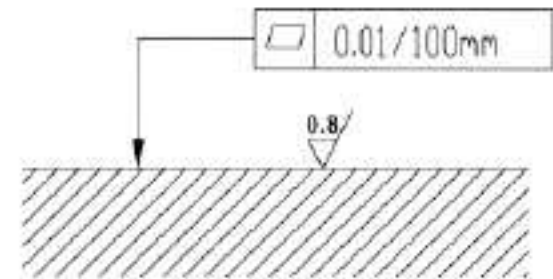

Dimensions of ports' connecting surface

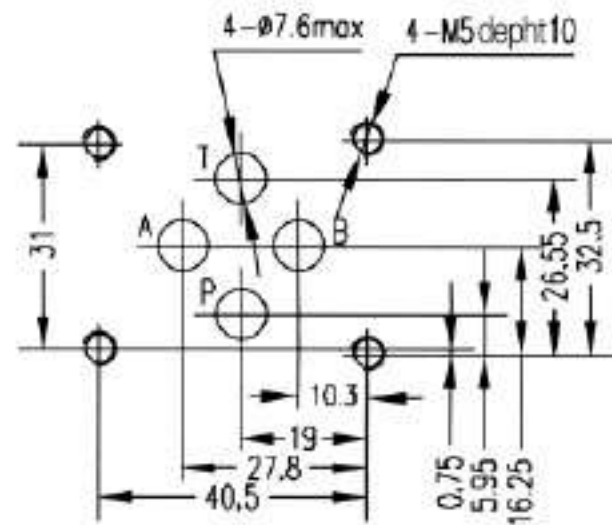

- | | |
|---|---|
| 1. Valve with 2 switching positions and 1 operating cylinders | 6. Valve with 2 switching positions and 2 operating cylinders |
| 2. Operating cylinder "a" | Valve with 3 switching positions and 2 operating cylinders |
| 3. Operating cylinder "b" | |
| 4. Nameplate | 7. O-ring 9.81 x 1.78 with ports A, B, P, T |
| 5. Connecting surface | |

Subplate(see page 205)

G341/01 (G1/4"); G341/02 (M14X1.5)


G342/01 (G3/8"); G342/02 (M18X1.5)

G502/01 (G1/2"); G502/02 (M22X1.5)


Unit dimensions

(Dimensions in mm)


Type WH10

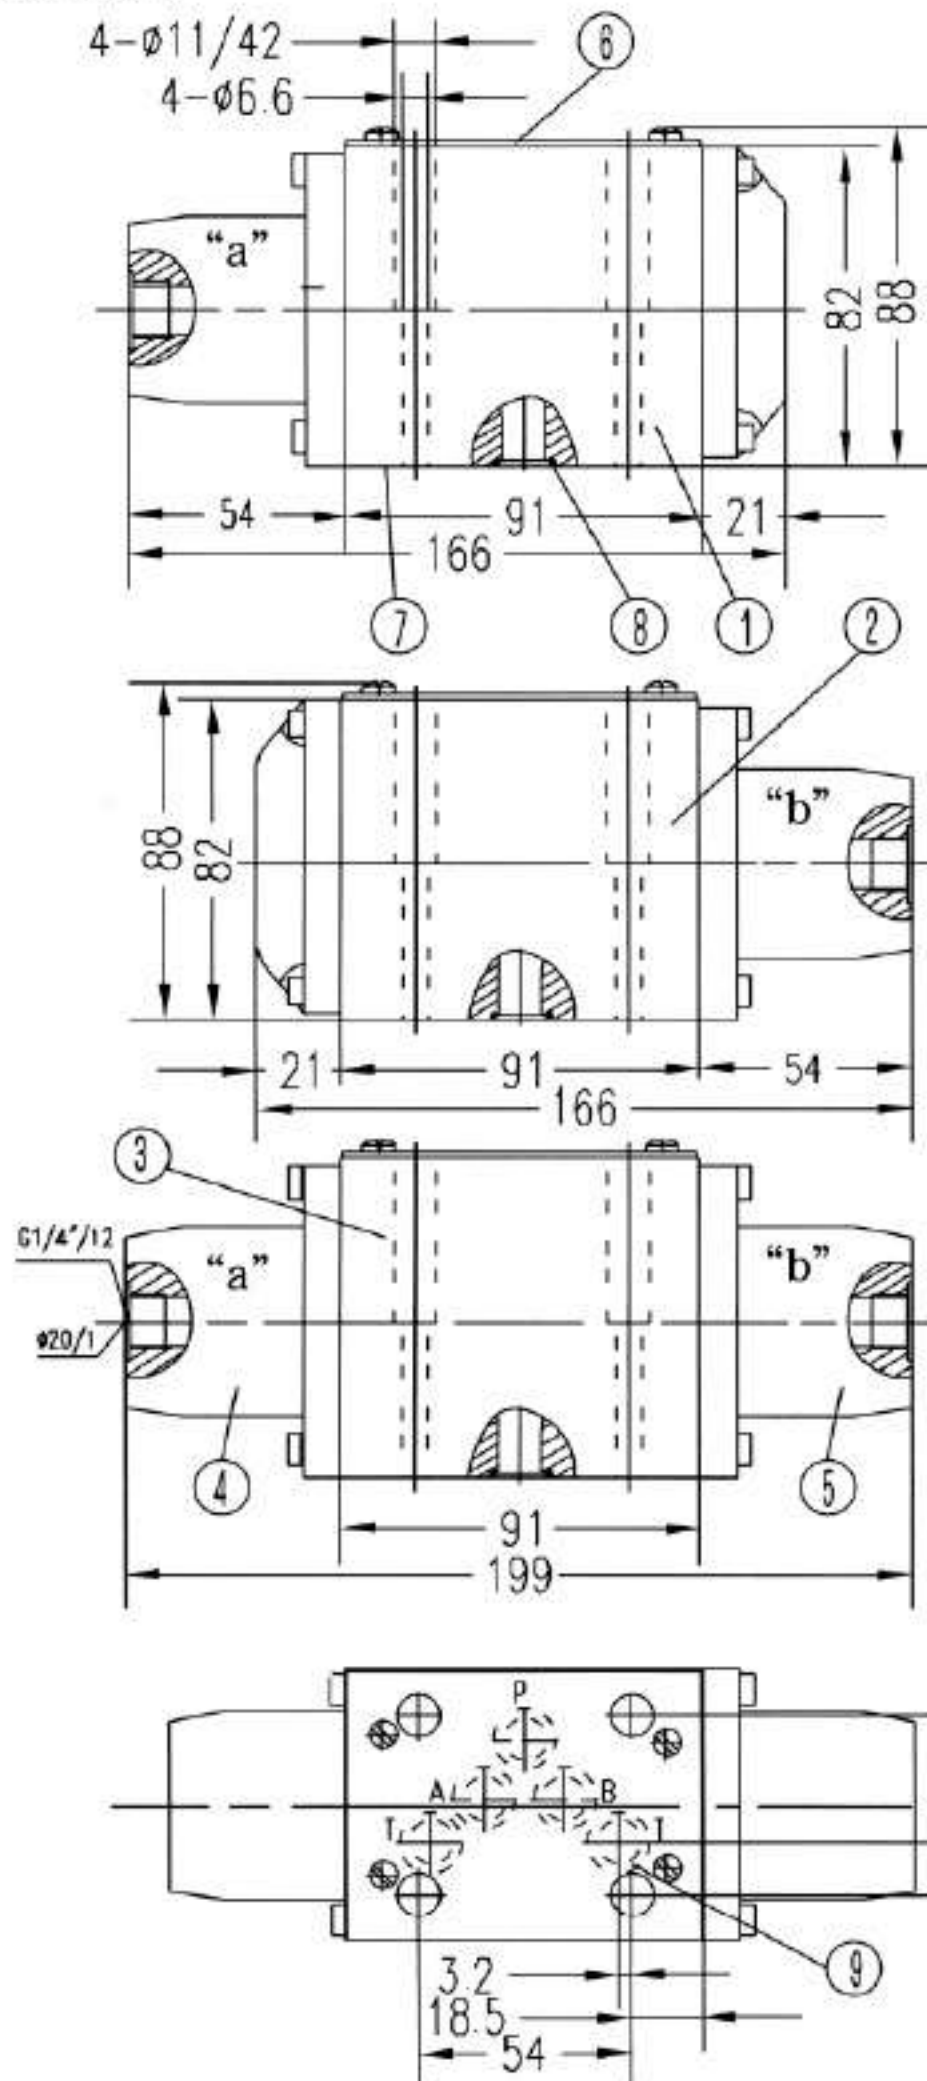

Dimensions of ports's connecting surface

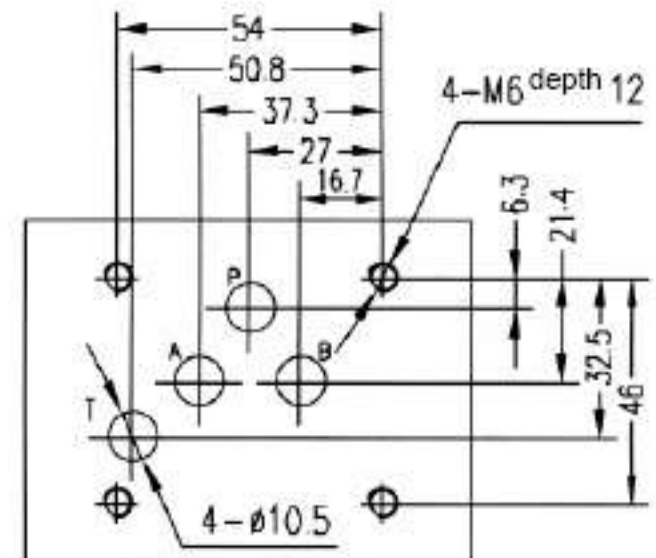

Required surface finish of mating piece

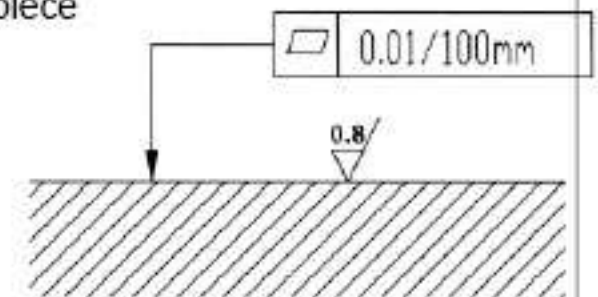

Subplate(see page 206)

- G66/01 (G3/8"); G66/02 (M18X1.5)
- G67/01 (G1/2"); G67/02 (M22X1.5)
- G534/01 (G3/4"); G534/02 (M27X2)

1. Valve with 2 switching positions and operating cylinder "a"
2. Valve with 2 switching positions and operating cylinder "b"
3. Valve with 3 switching positions and 2 operating cylinders
4. Operating cylinder "a"
5. Operating cylinder "b"
6. Nameplate
7. Valve connecting surface
8. O-ring 12 x 2 with ports A, B, P, T
9. If use control block, it used as assistant port

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	2/2-, 3/2- and 4/2-way poppet directional valves, solenoid actuated Type M-.SEW 6			RE 22058/12.2004
	Size 6	up to 42/63 MPa	up to 25 L/min	Replaces; RE22058/05.2001

Features:

- Direct actuated directional poppet valve, solenoid actuated
- Closed port is leak-free
- Switching is ensured even after long periods of being under pressure
- Solenoid coil can be rotated by 90°
- Individual electrical connection
- With protected hand override, optional
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Type
M-3SEW6U30B/420MG24N9K4
with plug-in connector

Function,section

General:

The 2 type M-.SEW directional valve is a solenoid actuated directional poppet valve. They control the start, stop and direction of a flow. They basically consist of a housing (1), the solenoids (2), the hardened valve system (3) and the ball(s) (4) as the closing element.

Basic principle:

In the initial position the ball (4) is pressed onto the seat by the spring (9), and in the switched position by the solenoid (2). The solenoid (2) force acts via the lever (6) and the ball (7) on the actuator pin (8), which is sealed on two sides. The chamber between the two sealing elements is connected with port P. The valve system (3) is thereby pressure balanced with regard to the actuating forces (solenoid or return spring). The valves can, therefore, be used up to a pressure of 63 MPa.





Note:


The 3/2-way poppet valves have a "negative switching overlap". Therefore, port T must always be connected. This means that during the switching procedure from the start of opening one valve seat to the closing of the other seat - all of the ports P-A-T are connected with each other. This, however, takes place in such a short space of time that in most applications it is irrelevant.

The hand override (10) makes it possible to switch the valve without energizing the solenoids.


Care has to be taken to ensure that the stated maximum flows are not exceeded! If necessary a cartridge throttle for flow limitation has to be fitted (see below).

The following possibilities are obtainable via the seat orientation:

	2/2-way poppet valve	3/2-way poppet valve
Symbol	"P" 	"U" 
Initial position	P and T connected	P and A connected, T closed leak-free
Switched position	P closed leak-free	P closed leak-free, A and T connected
Symbol	"N" 	"C" 
Initial position	P closed leak-free	P closed leak-free, A and T connected
Switched position	P and T connected	P and A connected, T closed leak-free

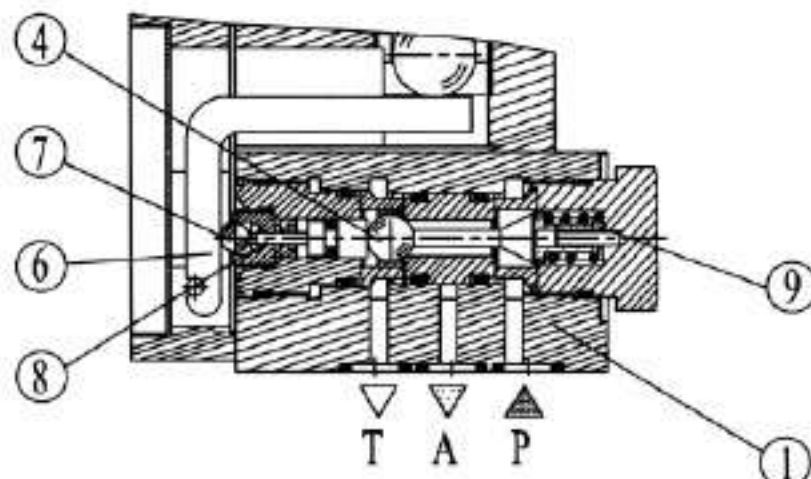

Type M-2SEW6N...

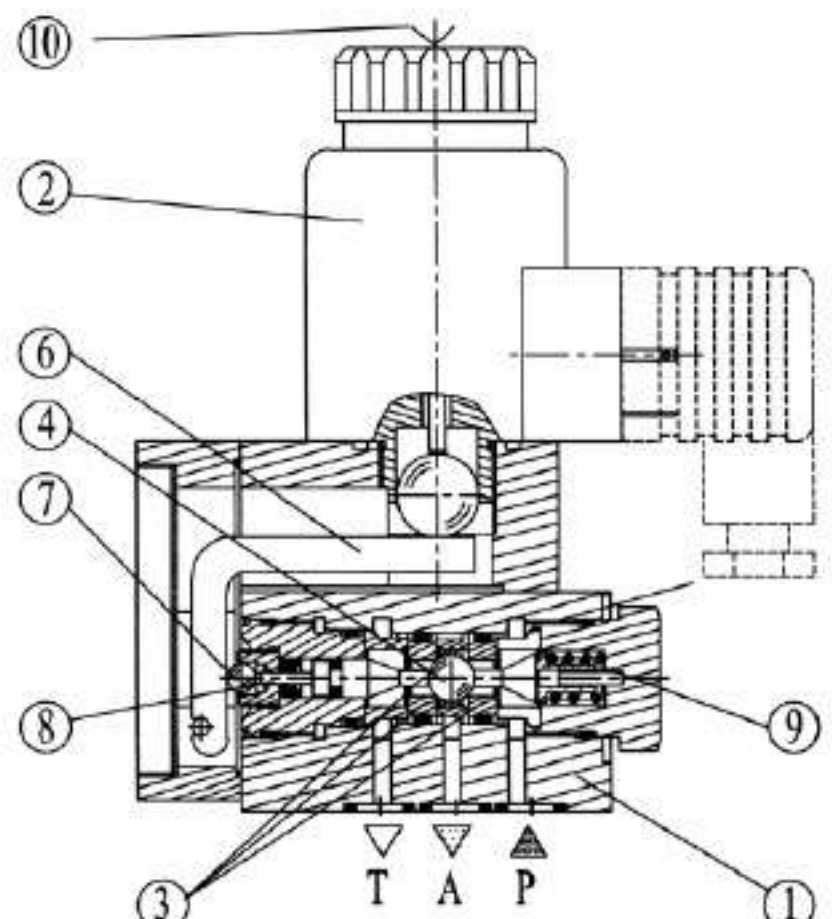

Type M-3SEW6U...

Illustration: 4/2-way poppet valve

In conjunction with a sandwich plate, a plus-1 plate, under the 3/2-way poppet valve this valve can be used as 4/2-way poppet valve.

Function of the plus-1 plate:

Initial position:

The main valve is not actuated. The spring (9) holds the ball (4.1) on the seat (11). Port P is closed and A is connected to T. In addition, a control line runs from A to the large area of the control spool (12), which is thus unloaded to tank. The pressure applied via P now moves the ball (13) onto seat (14). Thus, P is connected to B and A to T.

Transition position:


When the main valve is operated, the ball (4.2) is pushed against the spring (9) and then pressed onto the seat (15). Port T is then blocked, P, A and B are connected to each other for a short time.

Switched position:



P is connected to A. As the pump pressure acts via A on the large area of the control spool (12), ball (13) is pushed onto seat (16). Thus, B is connected to T and P to A. Ball (13) in the plus-1 plate has a "positive switching overlap".

In order to avoid pressure intensification when single rod cylinders are used, the annulus area of the cylinder must be connected to A.

Schematic illustration: initial position

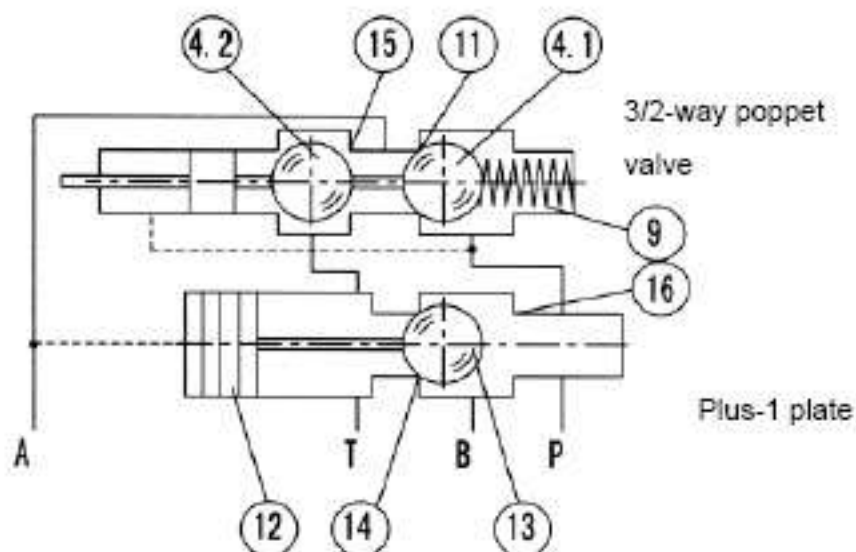

Due to the use of the plus-1 plate and the arrangement of the seats, the following combinations are possible:

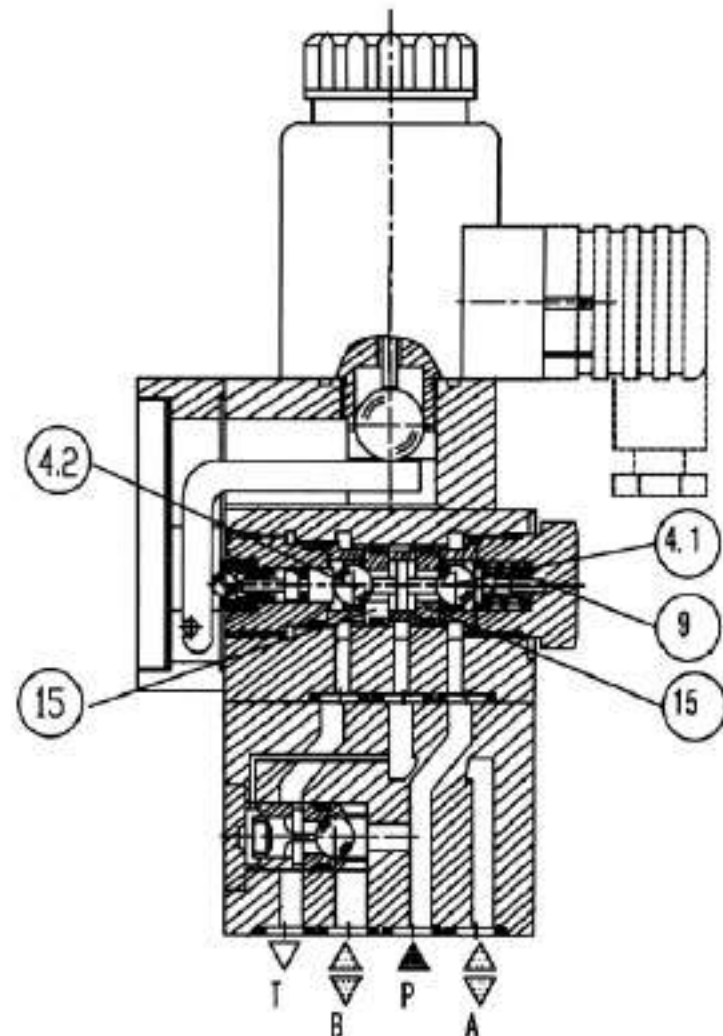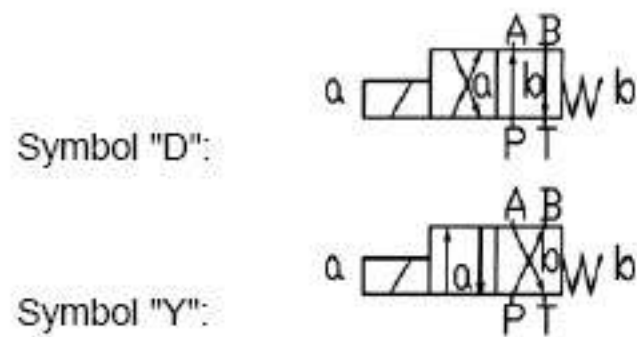

Type M-4SEW6Y...

Cartridge throttle

The use of the cartridge throttle is necessary when, due to operational conditions during the switching process, flows can occur that exceed the valve performance limits.

Example:


- Accumulator operation,
- Use as a pilot valve with internal pilot oil supply.

3/2-way poppet valve

The cartridge throttle is fitted into port P of the poppet valve.

4/2-way poppet valve (see next page)

The cartridge throttle is fitted into port P of the plus-1 plate.



Cartridge check valve

The cartridge check valve allows free flow from P to A and provides leak-free closure from A to P.

For examples, see page 11.


3/2-way poppet valve

The cartridge check valve is

inserted into port P of the poppet valve. 4/2-way poppet valve (see next page)

The cartridge check valve is

inserted into port P of the plus-1 plate.



Performance limits (measured at $v = 41 \text{ mm}^2 / \text{s}$ and $t = 50 \text{ }^\circ\text{C}$)

	Symbol	Comments	Operating pressure in MPa				Flow L/min
			P	A	B	T	
2-way circuit	"P"	Pressure to $P \geq T$	42/63			10	25
	"N"		42/63			10	25
3-way circuit	"U"	Pressure to $P \geq A \geq T$	42/63	42/63		10	25
	"C"		42/63	42/63		10	25
2-way circuit (only for unloading function)	"U"	Before switching from the initial position to the switched position, pressure must be present in port A. Pressure at $A \geq T$		42/63		10	25
	"C"	Pressure at $A \geq T$		42/63		10	25
4-way circuit	"D"	Single ball valve (symbol "U") in conjunction with a plus-1 plate $P \geq A \geq B \geq T$	42/63	42/63	42/63	10	25
	"Y"	Two ball valve (symbol "C") in conjunction with a plus-1 plate $P \geq A \geq B \geq T$	42/63	42/63	42/63	10	25

General guidelines

- In order to operate the valve safely and to hold it safely in the switched position, the pressure in P must be $\geq A \geq T$ (for design reasons).
- The ports P, A and T (3/2-way poppet valve) as well as P, A, B and T (4/2-way poppet valve) are positively assigned to their individual functions. They must not be interchanged or plugged. Flow is only permitted in the direction of the arrow.
- When using the plus-1 plate (4/2-way function) the following lower operating values must be taken into account: $p_{min} = 0.8 \text{ MPa}$; $q_v > 3 \text{ L/min}$.
- The specified maximum flow must not be exceeded.

The performance limit was determined with the solenoids at operating temperature, 10% under voltage and with the tank not pressurized.

Recommended type (Could Supplied in short time)

Ordering Type:

- M-3SEW6 C 30/ 420 MG24 N9 K4
- M-3SEW6 C 30/ 630 MG24 N9 K4
- M-3SEW6 U 30/ 420 MG24 N9 K4
- M-3SEW6 U 30/ 630 MG24 N9 K4

Technical data (For applications outside these parameters, please consult us!)

General			
Installation		optional	
Max. ambient temperature	(°C)	50	
Weight	2/2-way poppet valve	(kg)	1.5
	3/2-way poppet valve	(kg)	1.5
	4/2-way poppet valve	(kg)	2.3
Hydraulic data			
Max. operating pressure	(MPa)	see table on page 140	
Max. flow	(L/min)	25	
Pressure fluid		mineral oils or phosphate ester	
Pressure fluid temperature range	(°C)	- 30 to + 80	
Viscosity range	(mm ² /s)	2.8 to 500	
Degree of contamination	µm	Maximum permissible degree of contamination of the hydraulic fluid to NAS 1638 class 9. We therefore recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.	
Electrical data			
Type of voltage		DC	AC
Available voltages ¹⁾	(V)	12, 24, 42, 96, 110, 205, 220	only possible via rectifier
Voltage tolerance (nominal voltage)	(%)	± 10	
Power consumption	(W)	30	
Duty		100%	
Switching time to ISO 6403		see table below	
Switching frequency	(cycle s/h)	15000	
Protection to DIN 40 050		IP65	
Max. coil temperature	(°C)	to 150	


1) Special voltages on request

When connecting the electrics, the protective conductor (PE) must be connected according to the relevant regulations.

Switching time in ms (installation: solenoid vertical)													
Pressure in MPa	Flow q_v in L/min	DC solenoid						DC solenoid + rectifier					
		Symbols U, C, D, Y						Symbols U, C, D, Y					
		t_{on}				t_{off}		t_{on}				t_{off}	
		Without tank pressure						Without tank pressure					
		U	C	D	Y	C	Y	U	C	D	Y	C	Y
14	25	25	30	25	30	10	10	30	40	30	40	35	35
28								35	45	35	45	40	40
32								35	50	40	50	50	50
42								40	55	40	55	50	50
50								40	55	40	55	55	55
60								40	55	40	55	55	55


Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

$\Delta p - q_v$ -characteristic curves
2/2-way poppet valve

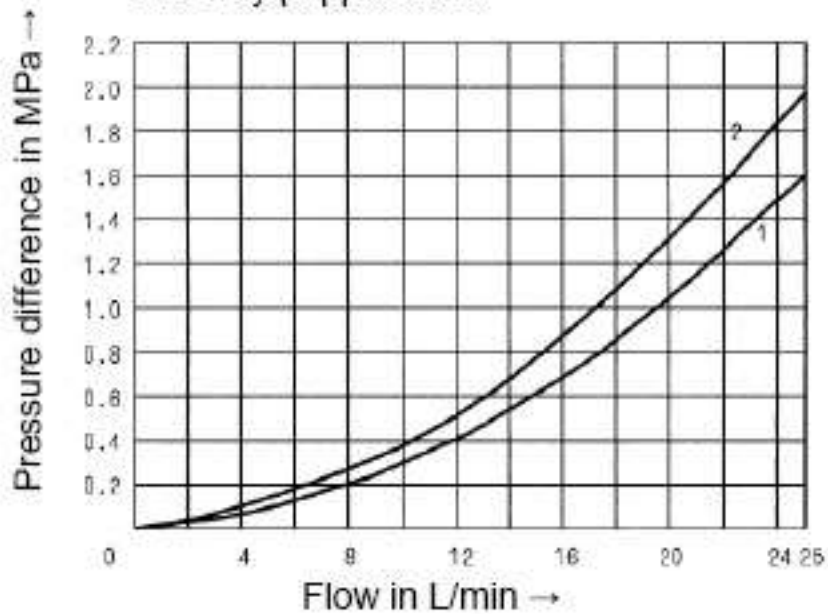


- 1 M-2SEW 6 N ... P to T
- 2 M-2SEW 6 P ... P to T

$\Delta p - q_v$ -characteristic curves
4/2-way poppet valve

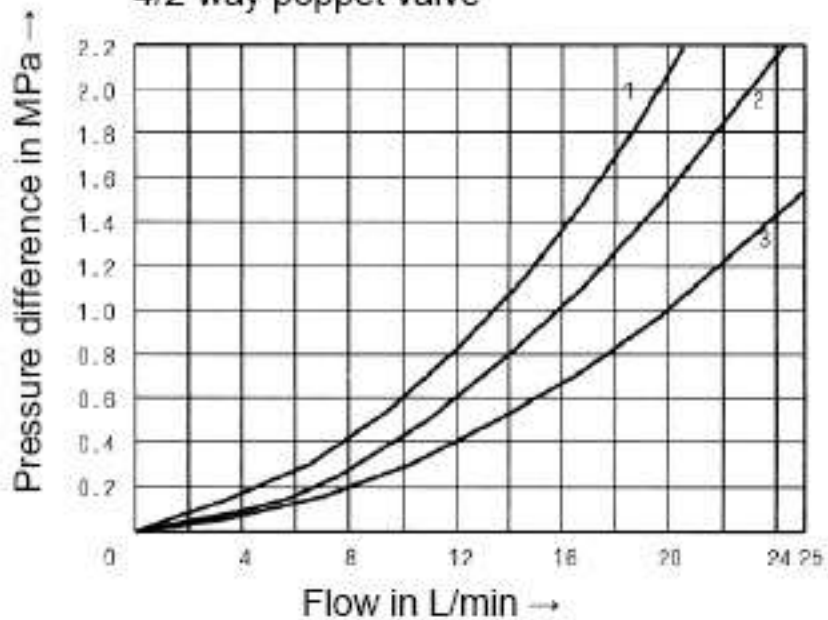

$\Delta p - q_v$ -characteristic curves
3/2-way poppet valve

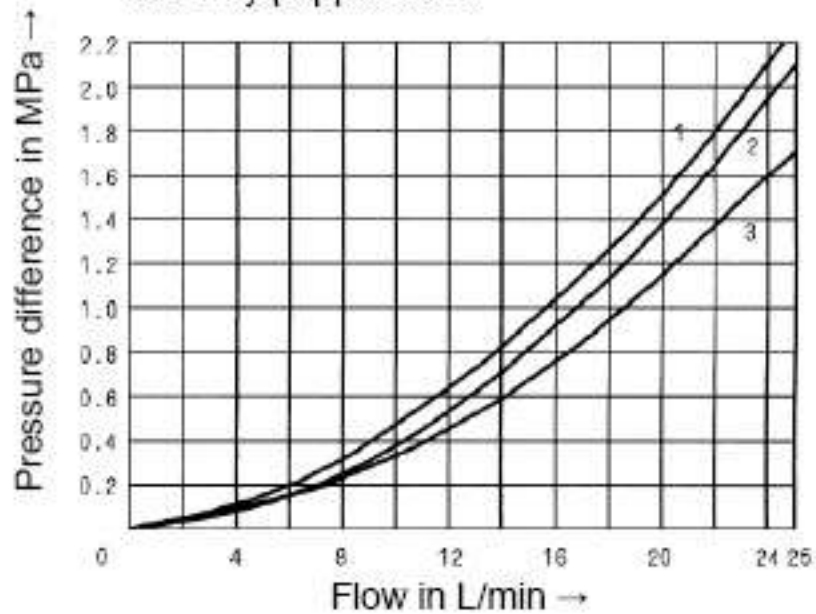


- 1 M-3SEW 6 $\begin{smallmatrix} U \\ C \end{smallmatrix}$..., A to T
- 2 M-3SEW 6 U ... P to A
- 3 M-3SEW 6 C ... P to A

- 1 M-4SEW 6 $\begin{smallmatrix} D \\ Y \end{smallmatrix}$..., A to T


- 2 M-4SEW 6 $\begin{smallmatrix} D \\ Y \end{smallmatrix}$..., P to A


- 3 M-4SEW 6 $\begin{smallmatrix} D \\ Y \end{smallmatrix}$..., P to B, B to T

$\Delta p - q_v$ -characteristic curve
Cartridge check valve

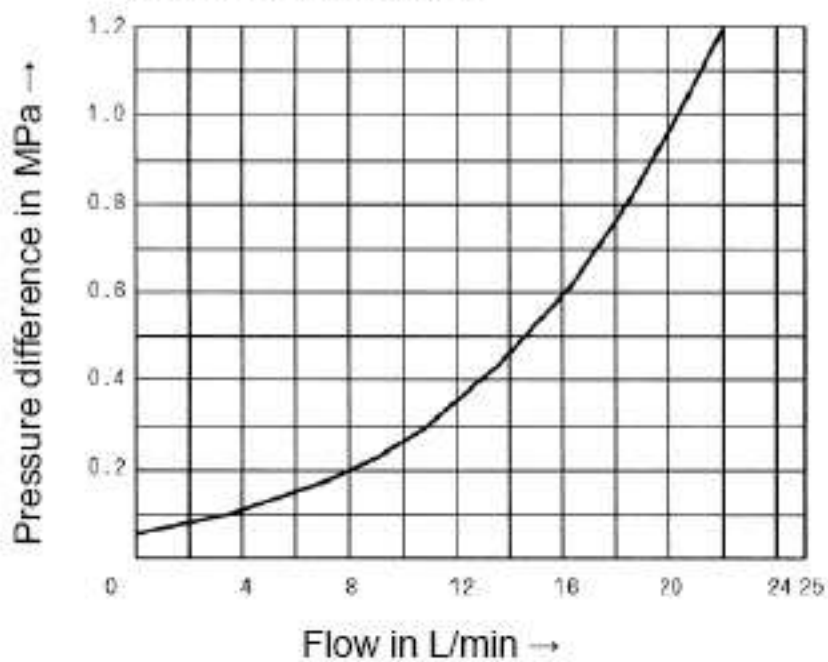


$\Delta p - q_v$ -characteristic curves
Throttle insert

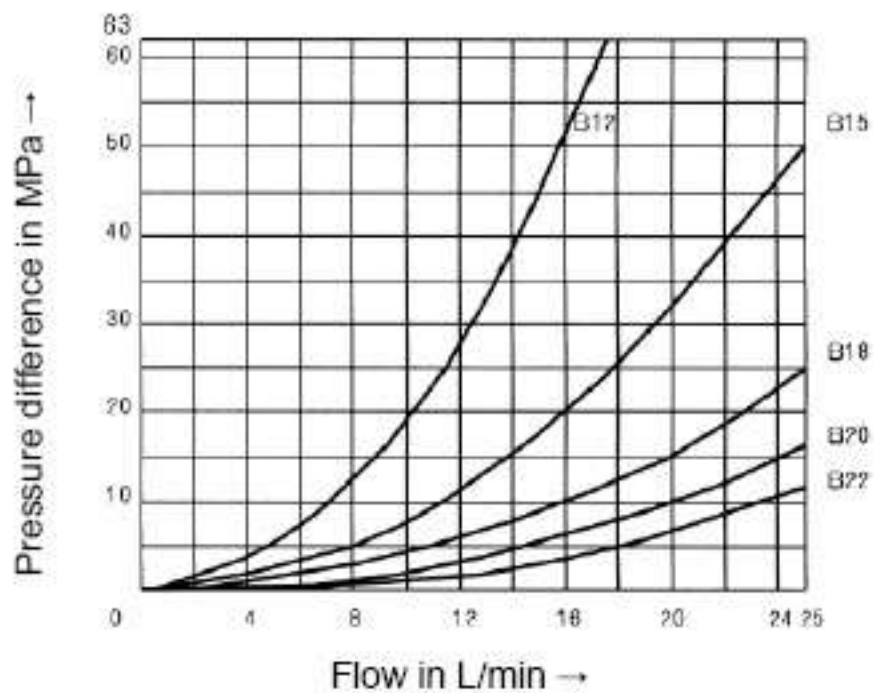

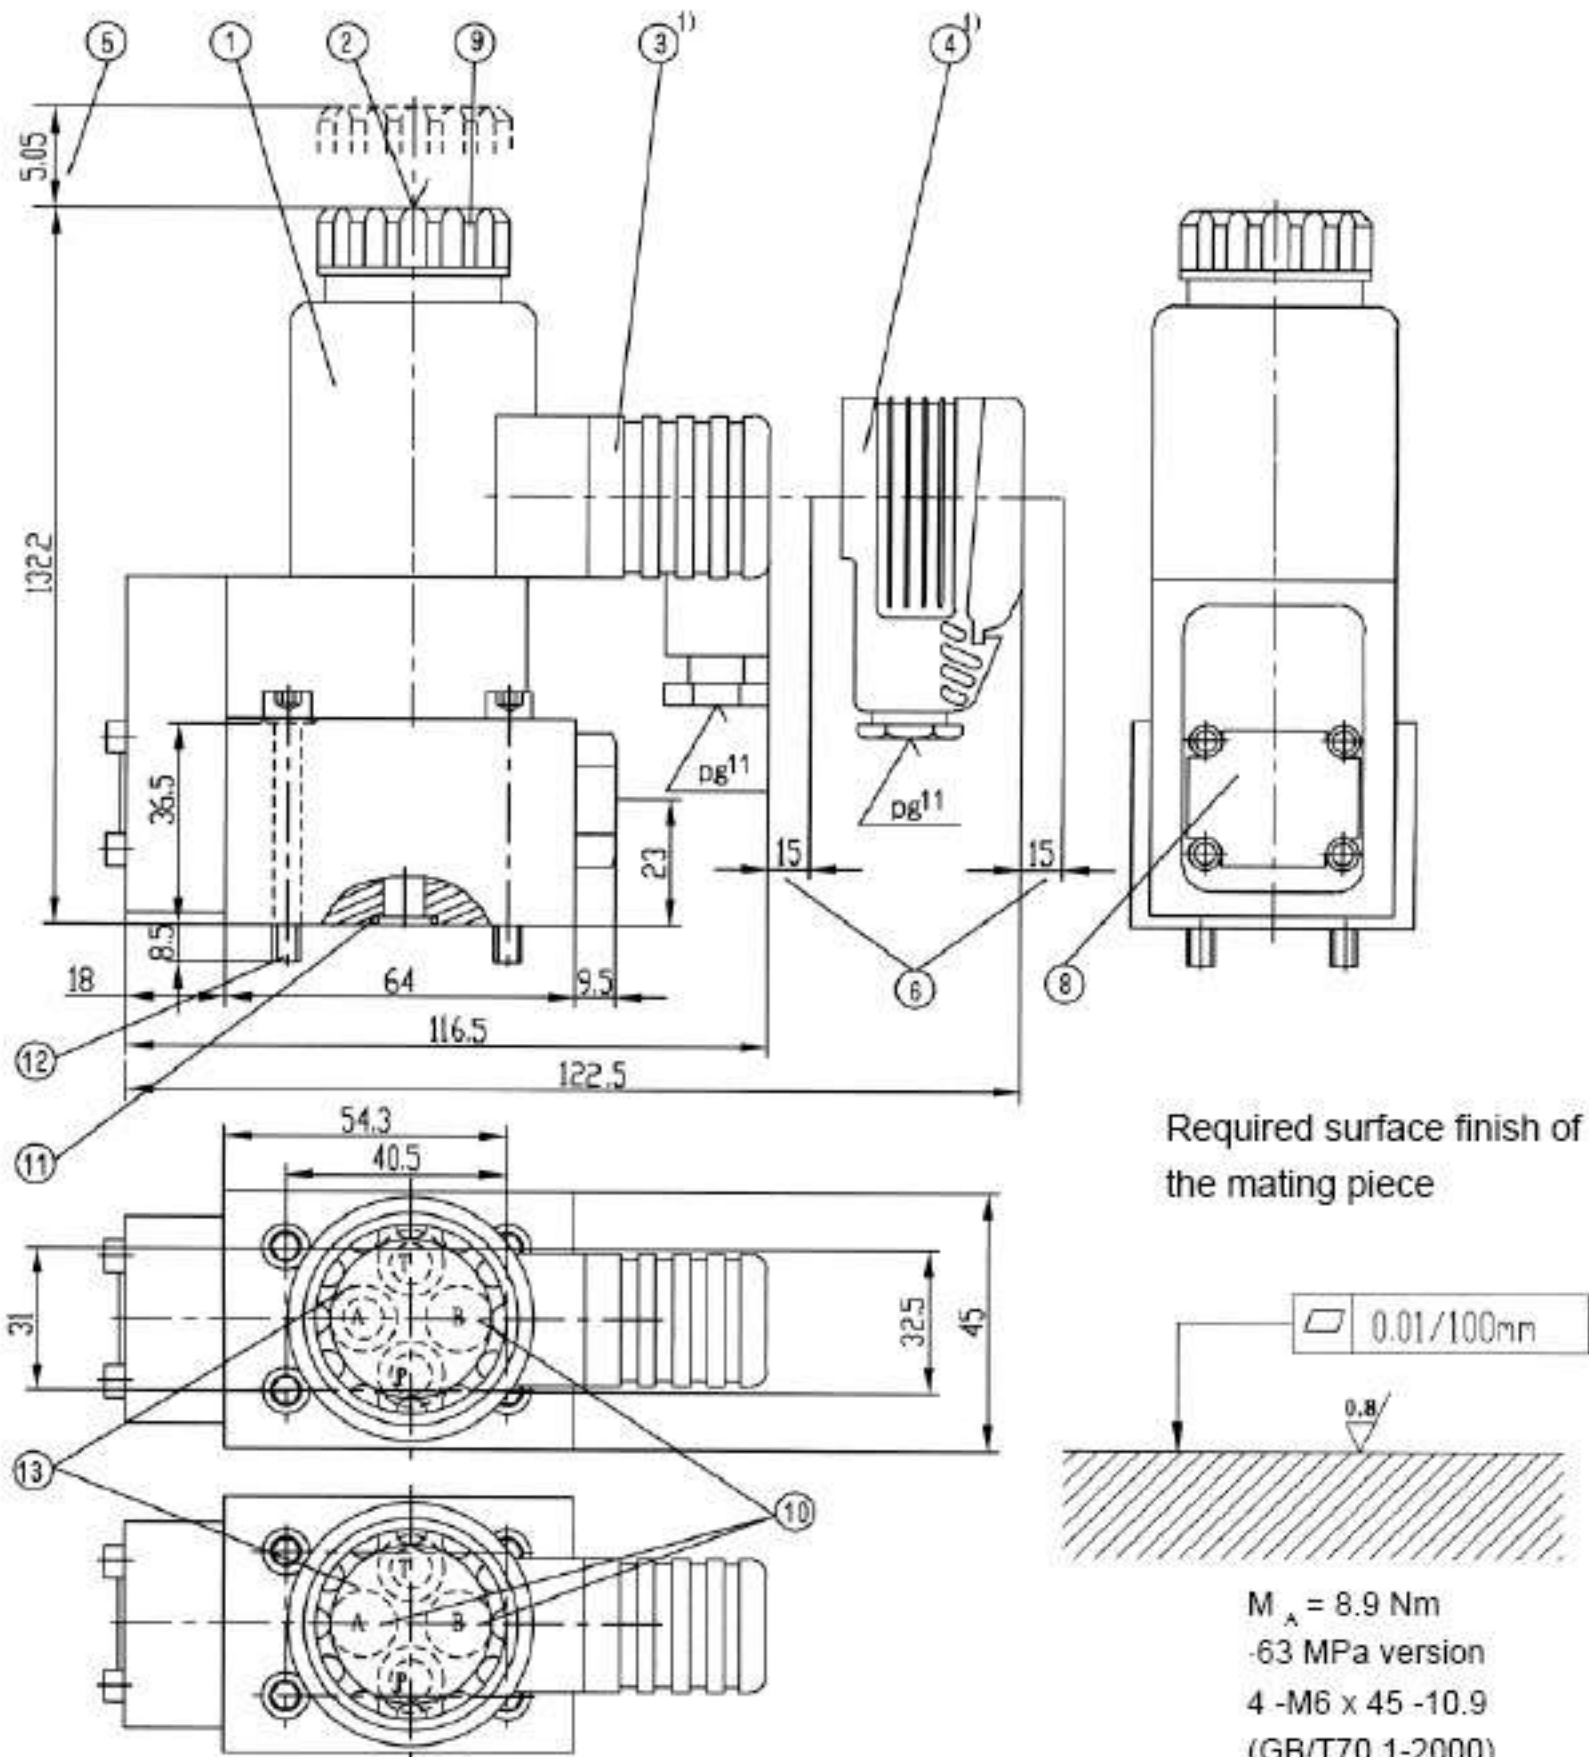

Required surface finish of the mating piece

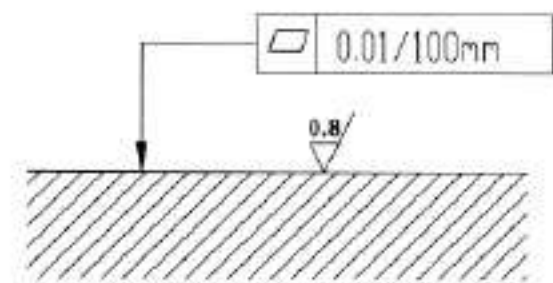

$M_A = 8.9 \text{ Nm}$
 -63 MPa version
 4 -M6 x 45 -10.9
 (GB/T70.1-2000)
 $M_A = 15.5 \text{ Nm}$
 are included within the scope of supply.

13 Porting pattern to DIN 24 340 form A,ISO 4401 and CETOP-RP 121 H

Subplates:(see page 205)


42 MPa version
 G341/01(G1/4")
 G342/01(G3/8")
 G502/01(G1/2")
 63 MPa version
 G576/01(G1/4")
 G577/01(G3/8")
 must be ordered separately.

- 1 Solenoid "a" (plug-in connector colour grey)
- 2 Protected hand override "N9"
- 3 Plug-in connector to DIN 43 650 ¹⁾ (may be rotated by 90°)
- 4 Large plug-in connector to DIN 43650 ¹⁾ (may be rotated by 90°)
- 5 Space required to remove the coil
- 6 Space required to remove the plug-in connector
- 8 Nameplate
- 9 Fixing nut,tightening torque $M_A = 4 \text{ Nm}$
- 1) Must be ordered separately, see page 141.


- 10 Attention!
 On 3/2-way poppet valves (42 MPa version), port B is a blind counter bore.
 On 2/2-way poppet valves (42 MPa version) ports A and B are blind counter bores.
- 11 O-rings 9.25 x1.78 for ports A, B and T
 O-ring 10.82 x1.78 for port P
- 12 Valve fixing screws
 -42 MPa version
 4 - M5 x 45 -10.9 (GB/T70.1-2000)

Unit dimensions: 4/2-way poppet valve

(Dimensions in mm)

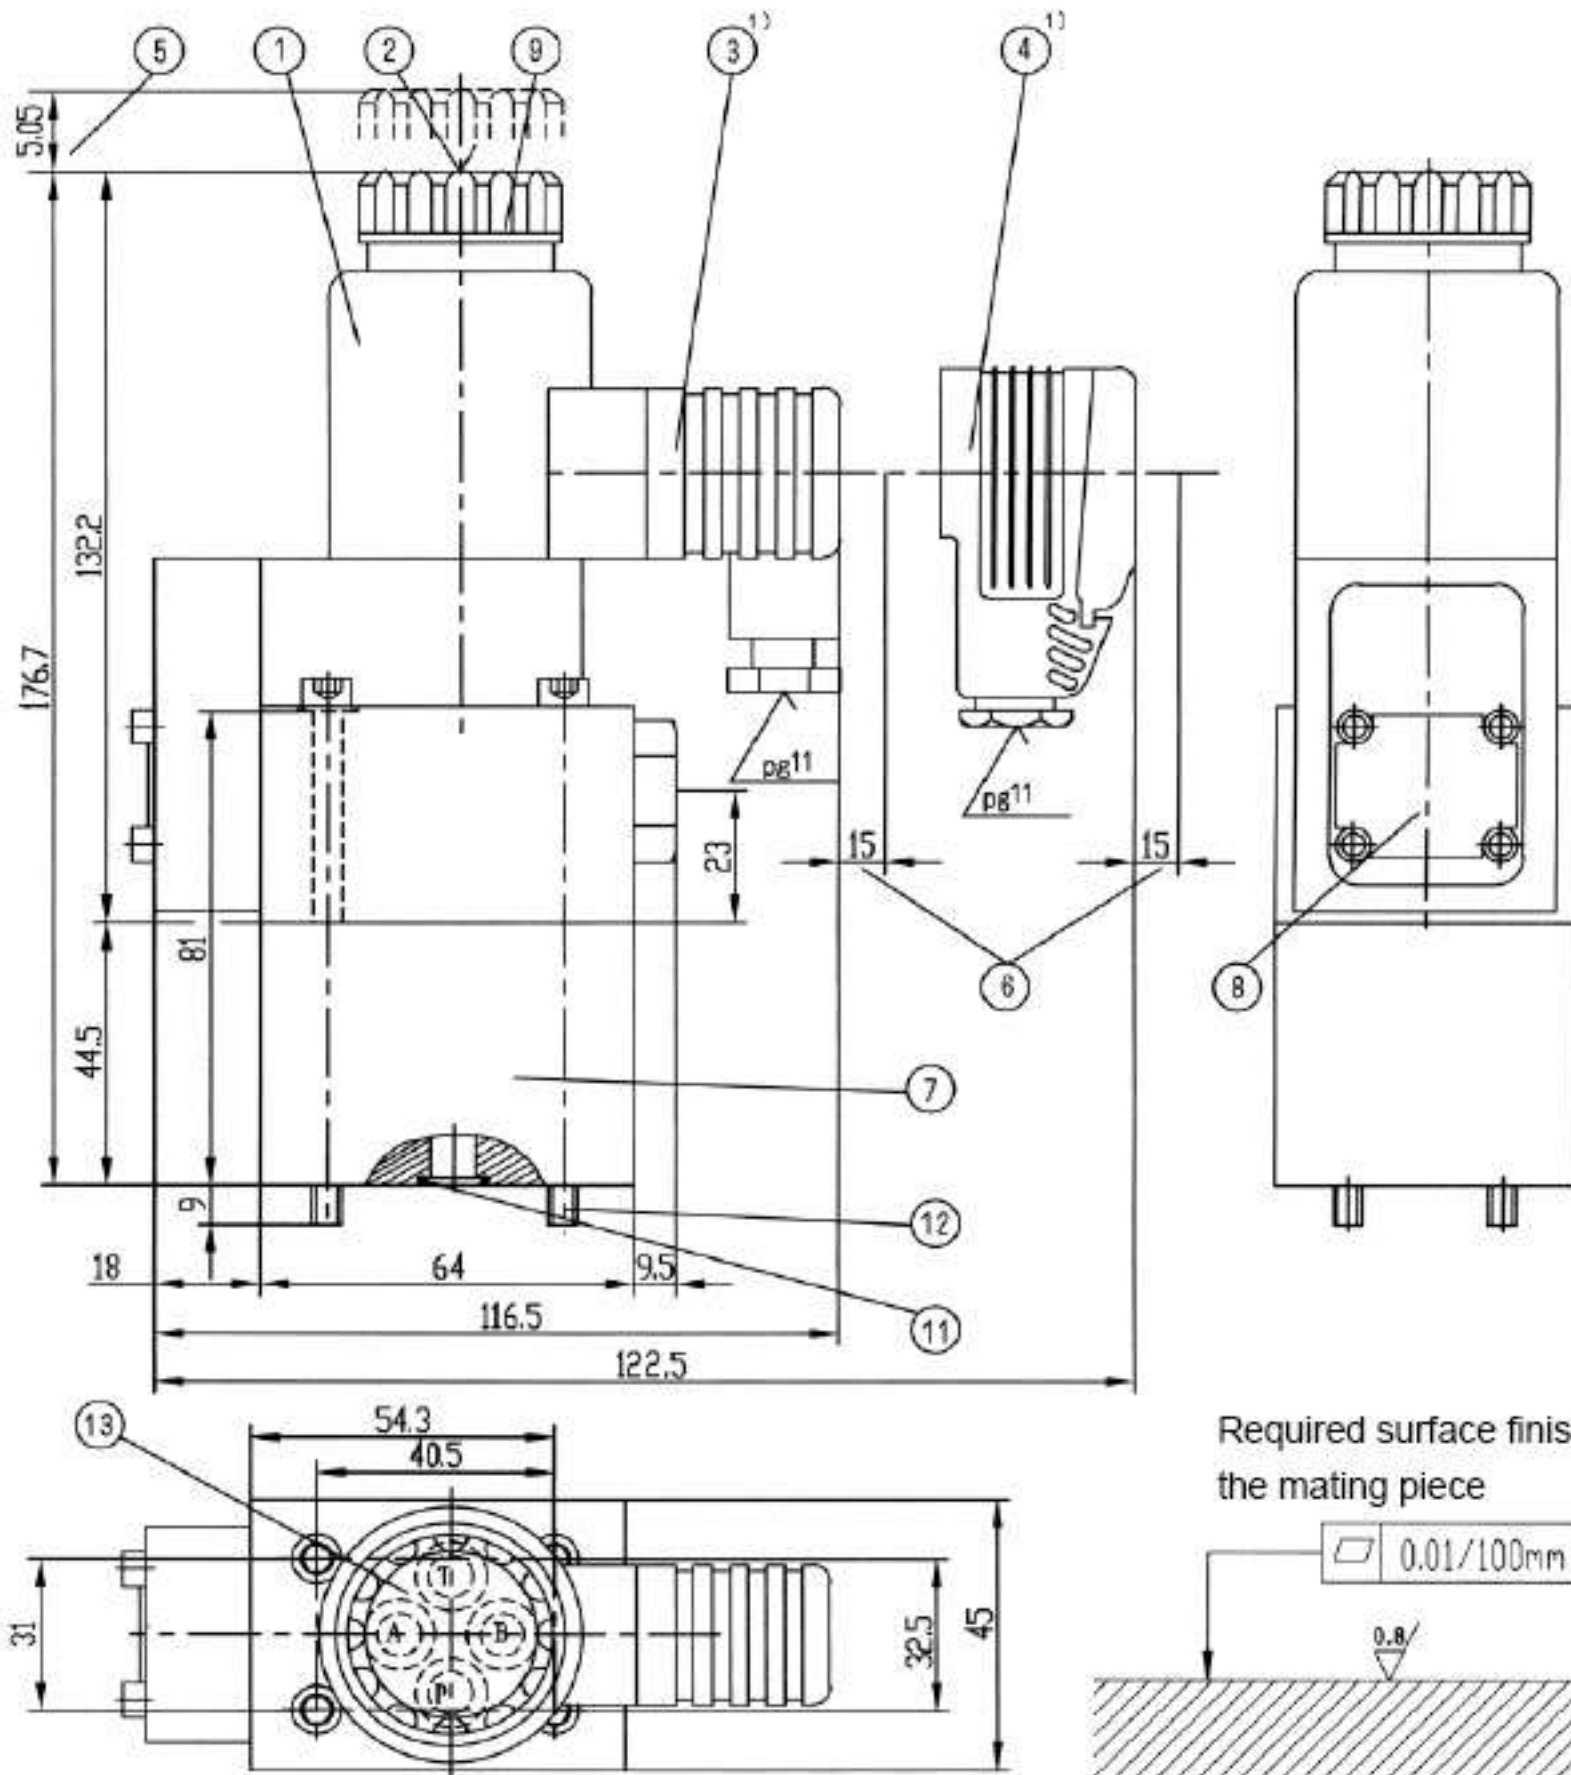

Required surface finish of the mating piece

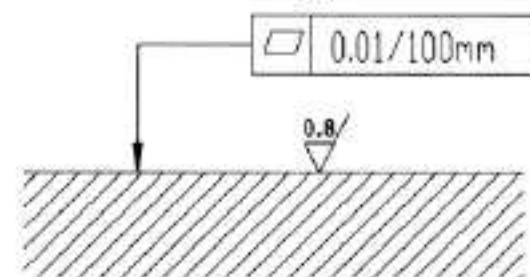

- 1 Solenoid "a" (plug-in connector colour grey)
- 2 Protected hand override "N9"
- 3 Plug-in connector to DIN 43 650 1) (may be rotated by 90°)
- 4 Large plug-in connector to DIN 43650 1) (may be rotated by 90°)
- 5 Space required to remove the coil
- 6 Space required to remove the plug-in connector
- 7 Plus-1 plate
- 8 Name plate
- 9 Fixing nut, tightening torque









- 11 O-rings 9.25x 1.78 for ports A, B and T
O-ring 10.82 x 1.78 for port P
- 12 Valve fixing screws
 - 42 MPa version
4 -M5 x 90 -10.9 (GB/T70.1-2000),
 $M_A = 8.9 \text{ Nm}$
 - 63 MPa version
4 -M6 x 90 -10.9 (GB/T70.1-2000),
 $M_A = 15.5 \text{ Nm}$

- are included within the scope of supply.
- 13 Porting pattern to DIN 24 340 form A, ISO 4401 and CETOP-RP 121 H
Subplates (see page 205)
 - 42 MPa version
G341/01(G1/4")
G342/01(G3/8")
G502/01(G1/2")
 - 63 MPa version
G576/01(G1/4")
G577/01(G3/8")
must be ordered separately.

1) must be ordered separately, see page 141

Application examples

These examples serve only to explain the possibilities offered by the poppet valve. They do not include the complete function.
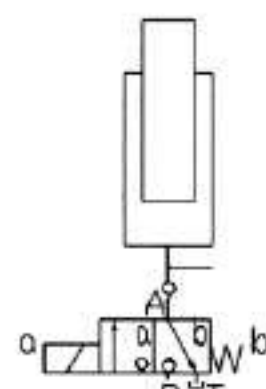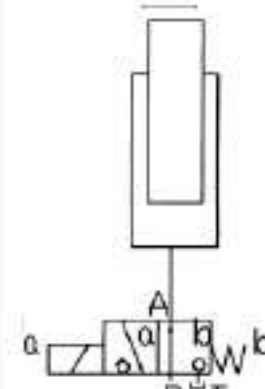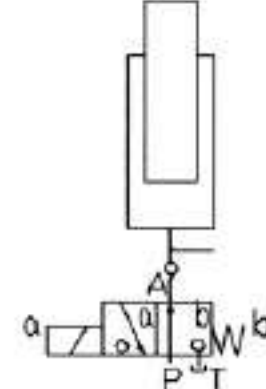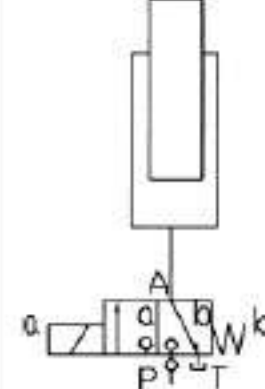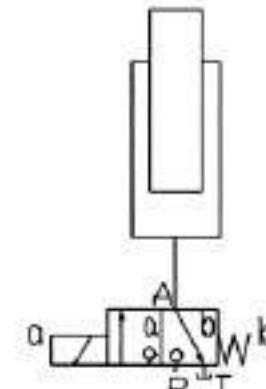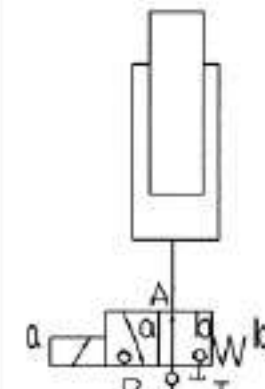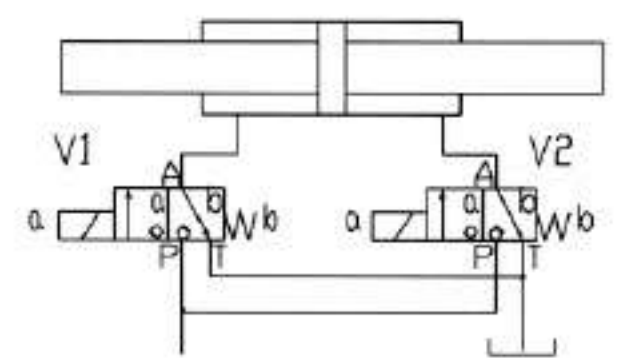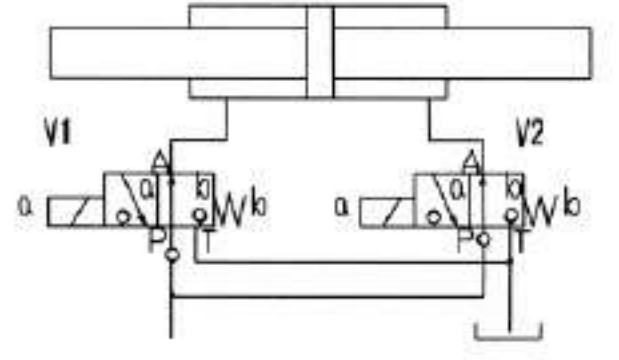
<p>Symbol "C"</p> 	<p>2/2-way circuit with a two poppet valve and check valve at port A The check valve must be installed in the pipe work. Initial position: Flow blocked, maximum pressure permissible. Pressure is held in the actuator, even when the pump is switched off, due to the check valve at port A. Switched position: Free-flow, maximum pressure permissible. Leakage drained via port T. The only leakage occurring is that which flows to T during the switching process.</p>	<p>Symbol "C"</p> 	<p>3/2-way circuit with a single poppet valve Initial position: Lifting Holding only due to limitation of travel and pressure in port P. Switched position: Lowering</p>
<p>Symbol "U"</p> 	<p>2/2-way circuit with a single poppet valve and check valve at port A The check valve must be fitted in the pipe work. Initial position: Free-flow, maximum pressure permissible. Pressure is held in the actuator, even when the pump is switched off, due to the check valve at port A. Switched position: Flow blocked, maximum pressure permissible. Leakage drained via port T. The only leakage occurring is that which flows to T during the switching process.</p>	<p>Symbol "C"</p> 	<p>3/2-way circuit with a two poppet valve and cartridge check valve in port P The check valve is fitted in the P port of the 3/2-way poppet valve. Initial position: Lowering Switched position: Lifting The load can be held in any position while the pump is switched off and the solenoid energized.</p>
<p>Symbol "C"</p> 	<p>3/2-way circuit with a two poppet valve Initial position: Lowering Switched position: Lifting Holding only due to limitation of travel and pressure in port P.</p>	<p>Symbol "U"</p> 	<p>3/2-way circuit with a single poppet valve and cartridge check valve in port P The check valve is fitted into the P port of the 3/2-way poppet valve. Initial position: Lifting The load can be held in any position while the pump is switched off. Switched position: Lowering</p>
<p>Symbol "C"</p> 	<p>4/3- (4/4-) way circuit with a 2 two poppet valves V1 and V2 in the initial position: Both cylinder sides are connected to the tank port. V2 in the switched position: The piston moves to the left V1 in the switched position: The piston moves to the right V1 and V2 in the switched position: Both cylinders sides are connected to the pump port. Rapid traverse is possible when a single rod cylinder with an area ratio of 2 : 1, is used. Attention! When using single rod cylinders, the performance limit (double flow) and the maximum permissible operating pressure (pressure intensification) of the valve must be taken into account.</p>		
<p>Symbol "U"</p> 	<p>4/3- (4/4-) way circuit with a 2 two poppet valves and cartridge check valve in port P of the 3/2-way poppet valves V1 and V2 in the initial position: The piston is locked externally to prevent movement. V2 in the switched position: The piston moves to the right V1 in the switched position: The piston moves to the left V1 and V2 in the switched position: Both cylinder sides are connected to the tank port. Attention! When using single rod cylinders, the performance limit (double flow) and the maximum permissible operating pressure (pressure intensification) of the valve must be taken into account!</p>		

Notice

1. The fluid must be filtered. Minimum filter fineness is 20 μm .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to $\frac{0.8}{\sqrt{\text{R}}}$.
6. Surface finish of mating piece is required to 0.01/100mm.

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	3/2- and 4/2-way poppet directional valves, solenoid actuated Type M-SEW 10			RE 22059/12.2004
	Size 10	up to 42/63MPa	up to 40L/min	

Features:

- Direct actuated directional poppet valve, solenoid actuated
- Closed port is leak-free
- Switching is ensured even after long periods of being under pressure
- Air gap DC solenoids with removable coil (AC volt-ages possible via rectifier)
- Solenoid coil can be rotated by 90°
- Individual electrical connection
- With protected hand override, optional
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Function,section

General:

The 2 type M-SEW directional valve is a solenoid actuated directional poppet valve. They control the start, stop and direction of a flow. They basically consist of a housing (1), the solenoids (2), the hardened valve system (3) and the ball(s) (4) as the closing element.

Basic principle:


In the initial position the ball (4) is pressed onto the seat by the spring (9), and in the switched position by the solenoid (2). The solenoid (2) force acts via the lever (6) and the ball (7) on the actuator pin (8), which is sealed on two sides. The chamber between the two sealing elements is connected with port P. The valve system (3) is thereby pressure balanced with regard to the actuating forces (solenoid or return spring). The valves can, therefore, be used up to a pressure of 63 MPa.

Note:



The 3/2-way poppet valves have a "negative switching overlap". Therefore, port T must always be connected. This means that during the switching process - from the start of opening one valve seat to the closing of the other seat - all of the ports P-A-T are connected with each other. This, however, takes place in such a short space of time that in most applications it is irrelevant. The hand override (10) makes it possible to switch the valve without energizing the solenoids. Care has to be taken to ensure that the stated maximum flows are not exceeded! If necessary a cartridge throttle for flow limitation has to be fitted (see below).

The following possibilities are obtainable via the seat orientation:

Symbol "U"



Symbol "C"

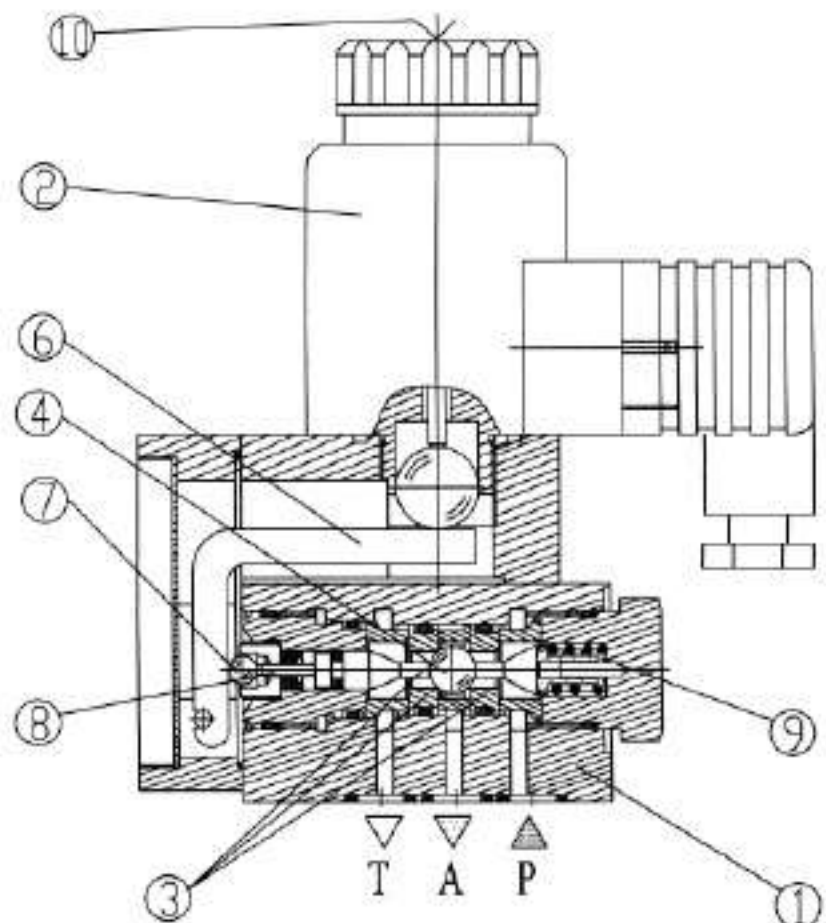

Type M-3SEW10U...

Illustration: 4/2-way poppet valve

In conjunction with a sandwich plate, a plus-1 plate, under the 3/2-way poppet valve this valve can be used as 4/2-way poppet valve.

Function of the plus-1 plate:

Initial position:

The main valve is not actuated. The spring (9) holds the ball (4.1) on the seat (11). Port P is closed and A is connected to T. In addition, a control line runs from A to the large area of the control spool (12), which is thus unloaded to tank. The pressure applied via P now moves the ball (13) onto seat (14). Thus, P is connected to B and A with T.

Transition position:

When the main valve is operated, the ball (4.2) is pushed against the spring (9) and then pressed onto the seat (15). Port T is then blocked, P, A and B are connected to each other for a short time.


Switched position:

P is connected to A. As the pump pressure acts via A on the large area of the control spool (12), the ball (13) is pushed onto seat (16). Thus, B is connected to T and P to A. Ball (13) in the plus-1 plate has a "positive switching overlap".


In order to avoid pressure intensification when single rod cylinders are used, the annulus area of the cylinder must be connected to A.

Due to the use of the plus-1 plate and the arrangement of the seats, the following combinations are possible:



Symbol "D"

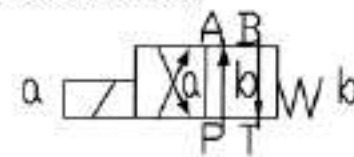

Symbol "Y"

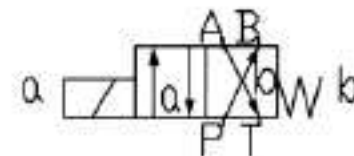

Schematic illustration: initial position

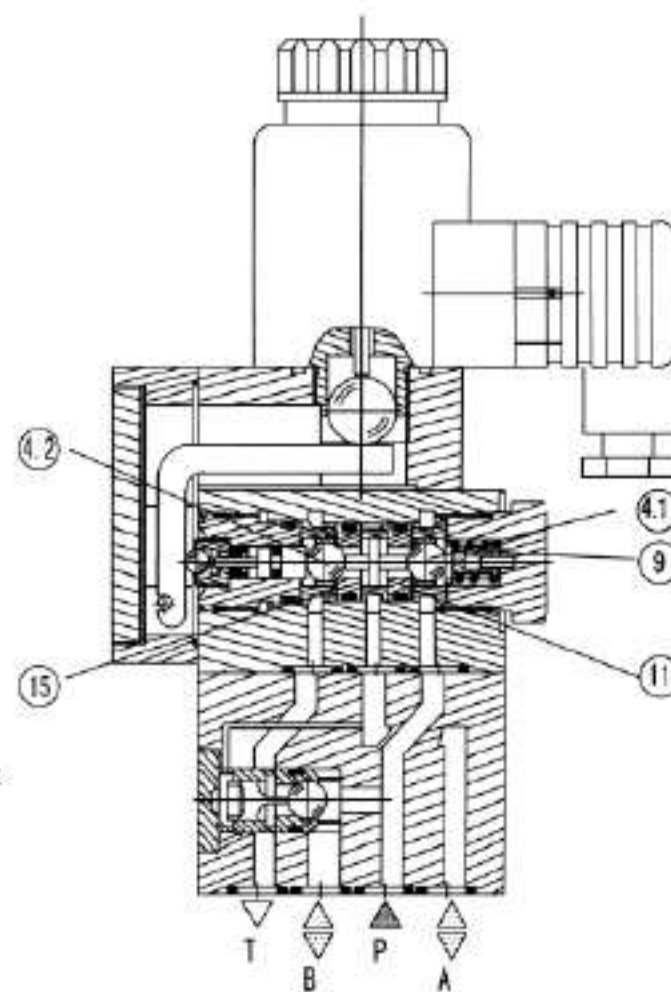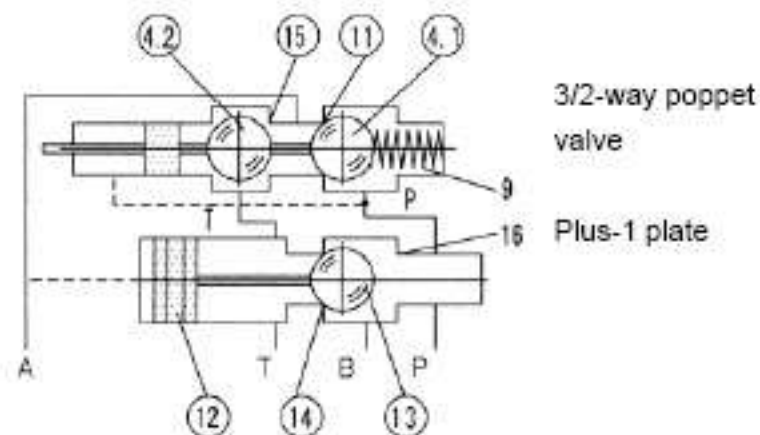

Type M-4SEW10Y...

Cartridge throttle

The use of the cartridge throttle is necessary when, due to operational conditions during the switching process, flows can occur that exceed the valve performance limits.

Example:


- Accumulator operation,
- Use as a pilot valve with internal pilot oil supply.

3/2-way poppet valve

The cartridge throttle is fitted into port P of the poppet valve.

4/2-way poppet valve

The cartridge throttle is fitted into port P of the plus-1 plate.



Cartridge check valve


The cartridge check valve allows free flow from P to A and provides leak-free closure from A to P. For examples:

3/2-way poppet valve

The cartridge check valve is inserted into port P of the poppet valve.

4/2-way poppet valve

The cartridge check valve is inserted into port P of the plus-1 plate.

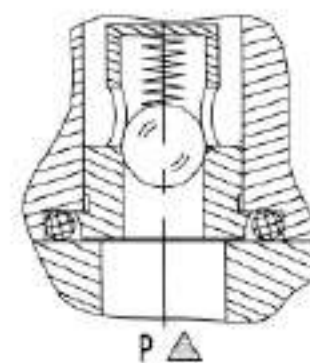

Ordering details

M -		SEW	10		10	B	/	M			K4	/		*
-----	--	-----	----	--	----	---	---	---	--	--	----	---	--	---

3 service ports = 3
4 service ports = 4

Nominal size 10 = 10

Service ports	3	4	
	•	—	=U
	•	—	=C
	—	•	=D
	—	•	=Y

• = available

Series 10 to 19 = 10
(10 to 19: unchanged installation and connection dimensions)

Technology of Beijing Huade Hydraulic =B

Operating pressure up to 42 MPa = 420
(fixing screws M6)
Operating pressure up to 63 MPa = 630
(fixing screws M8)

AC supply (permissible voltage tolerance ± P10%)	Nominal voltage of the DC solenoid when used with an AC voltage	Order detail
110V-50/60HZ	96V	G96
120V-60HZ	110V	
230V-50/60HZ	205V	G205

Further details
in clear text

No code = mineral oils
V = phosphate ester

No code = Without cartridge check valve, without throttle insert
P = With cartridge check valve
B12 = Throttle Φ 1.2 mm
B15 = Throttle Φ 1.5 mm
B18 = Throttle Φ 1.8 mm
B20 = Throttle Φ 2.0 mm
B22 = Throttle Φ 2.2 mm

Electrical connection
Individual connection
K4^{1,2)} = without plug, with protection cover

N9 = With protected manual override
No Code = Without manual override

G24 = 24VDC
G205²⁾ = 205VDC

M = Solenoid (air gap) with removable coil

Note: Other types of actuators e.g. pneumatic, hydraulic, rotary knob, rotary knob with lock, plunger, lever, roller lever on request!



1) Plug-in connectors have to be ordered separately (see below).

2) For the connection to an AC supply a DC solenoid must be used which is controlled via a rectifier (see table on the left).

For individual connections a large plug-in connector with integrated rectifier can be used (separate order, see below).

Ordering details: plug-in connector

Plug-in connections
DIN 43 650
ISO 4400



			Without indicator light	With indicator light	Without indicator light	With indicator light and Z-diode protective circuit
a grey	Material no.	074 683	008 616	313 923/24V 313 926/180-240V	313 932	310 994

Performance limits (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

	Symbol	Comments	Operating pressure in MPa				Flow in L/min
			P	A	B	T	
3-way circuit	"U" 	Pressure at $P \geq A \geq T$	42/63	42/63		10	40
	"C" 		42/63	42/63		10	40
2-way circuit (only for unloading function)	"U" 	Before switching from the initial position to the switched position, pressure must be present in port A. Pressure at $A \geq T$		42/63		10	40
	"C" 	Pressure at $A \geq T$		42/63		10	40
4-way circuit	"D" 	Single ball valve (symbol "U") in conjunction with a plus-1 plate $P > A \geq B > T$	42/63	42/63	42/63	10	40
	"Y" 	Two ball valve (symbol "C") in conjunction with a plus-1 plate $P \geq A \geq B > T$	42/63	42/63	42/63	10	40

General guidelines

In order to operate the valve safely and to hold it safely in the switched position, the pressure in P must be $\geq A \geq T$ (for design reasons).

The ports P, A and T (3/2-way poppet valve) as well as P, A, B and T (4/2-way poppet valve) are positively assigned to their individual functions. They must not be interchanged or plugged. Flow is only permitted in the direction of the arrow.

When using the plus-1 plate (4/2-way function) the following lower operating values must be taken into account: $p_{\text{min}} = 0.8 \text{ MPa}$; $q_v > 3 \text{ L/min}$.

The specified maximum flow must not be exceeded.

The performance limit was determined with the solenoids at operating temperature, 10% under voltage and with the tank not pressurized.

Technical data (for applications outside these parameters, please consult us!)

Installation		optional
Max. ambient temperature	($^\circ\text{C}$)	-30 – +50
Weight	3/2-way poppet valve	(kg) 2.0
	4/2-way poppet valve	(kg) 3.5
Hydraulic data		
Max. operating pressure	(MPa)	see table above
Max. flow	(L/min)	40
Pressure fluid		Mineral oils (for NBR seal) or phosphate ester (for FPM seal)
Pressure fluid temperature range	($^\circ\text{C}$)	-30 to +80
Viscosity range	(mm^2/s)	2.8 to 500
Degree of contamination	(μm)	Maximum permissible degree of contamination of the pressure fluid is to NAS 1638 class 9. We, therefore, recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.

Technical data

Electrical data

Type of voltage		DC	AC
Available voltages ¹⁾	(V)	12, 24, 42, 96, 110, 205, 220	only possible via rectifier 205, 220 (see ordering details)
Voltage tolerance (nominal voltage)	(%)	± 10	
Power consumption	(W)	30	
Duty		100%	
Switching time to ISO 6403		see table below	
Switching frequency cycle	(s/h)	15000	
Protection to DIN 40 050		IP65	
Max. coil temperature	(°C)	t0150	


1) Special voltages on request

When connecting the electrics, the protective conductor (PE \perp) must be connected according to the relevant regulations.


Switching time in ms (installation: solenoid vertical)

Pressure in MPa	Flow q_v L/min	DC solenoid								DC solenoid + rectifier							
		t_{ON} Without tank pressure				t_{OFF}				t_{OFF} Without tank pressure				t_{OFF}			
		U	C	D	Y	U, C	D, Y	U	C	D	Y	U	C	D	Y		
14	40	20	40	20	40	12	17	20	40	20	40	60	45	40	50		
28	40	25	45	20	45	12	17	20	45	25	45	60	45	45	55		
32	40	25	45	20	45	12	17	25	45	25	45	60	45	45	55		
42	40	30	45	20	50	12	17	25	45	25	50	60	45	45	55		
50	40	30	45	20	50	12	17	30	50	30	50	65	50	60	60		
60	40	30	50	20	50	12	17	30	50	30	50	65	50	60	60		



Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

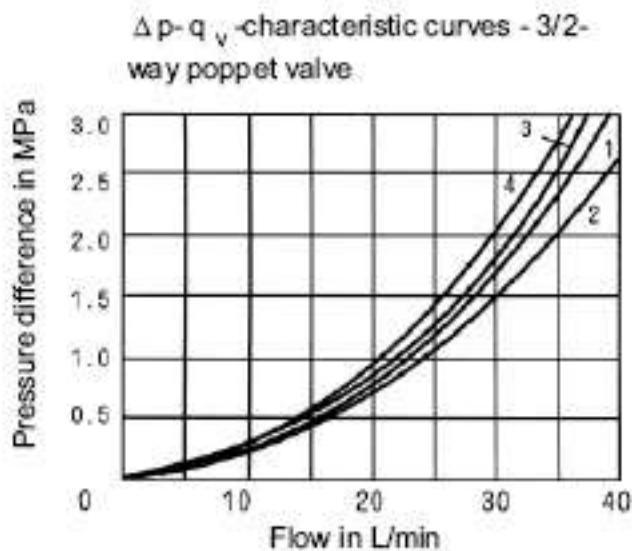


1 M-3SEW 10 C... P to A 3 M-3SEW 10 U... P to A
2 M-3SEW 10 C... A to T 4 M-3SEW 10 U... A to T

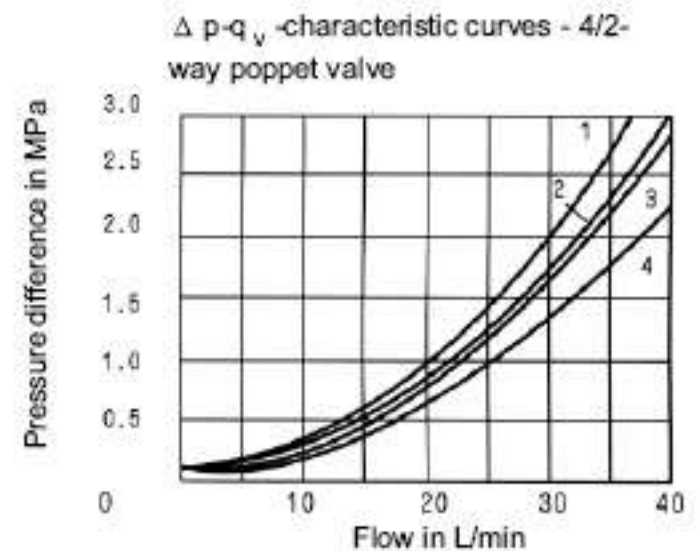

1 M-4SEW 10⁰... A to T 3 M-4SEW 10⁰... P to B
2 M-4SEW 10⁰... P to A 4 M-4SEW 10⁰... B to T

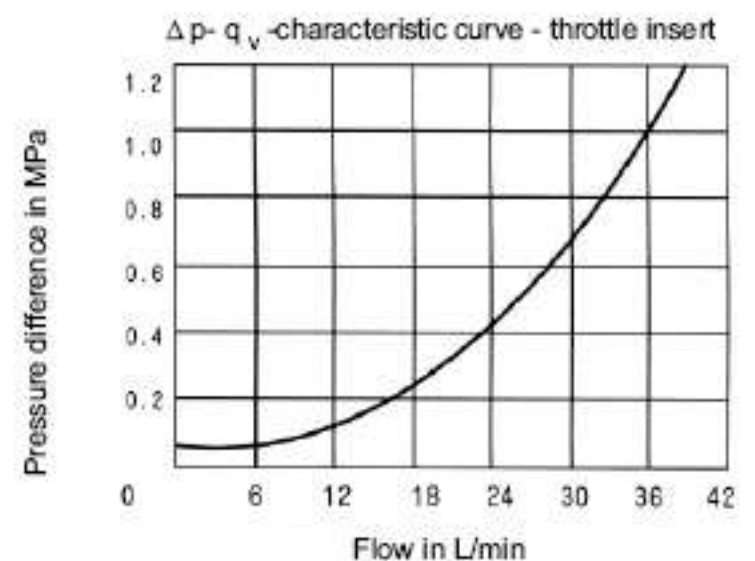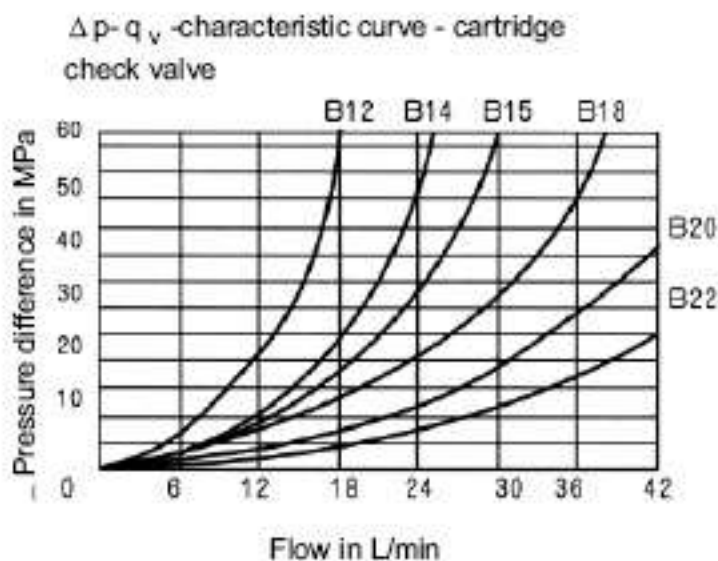

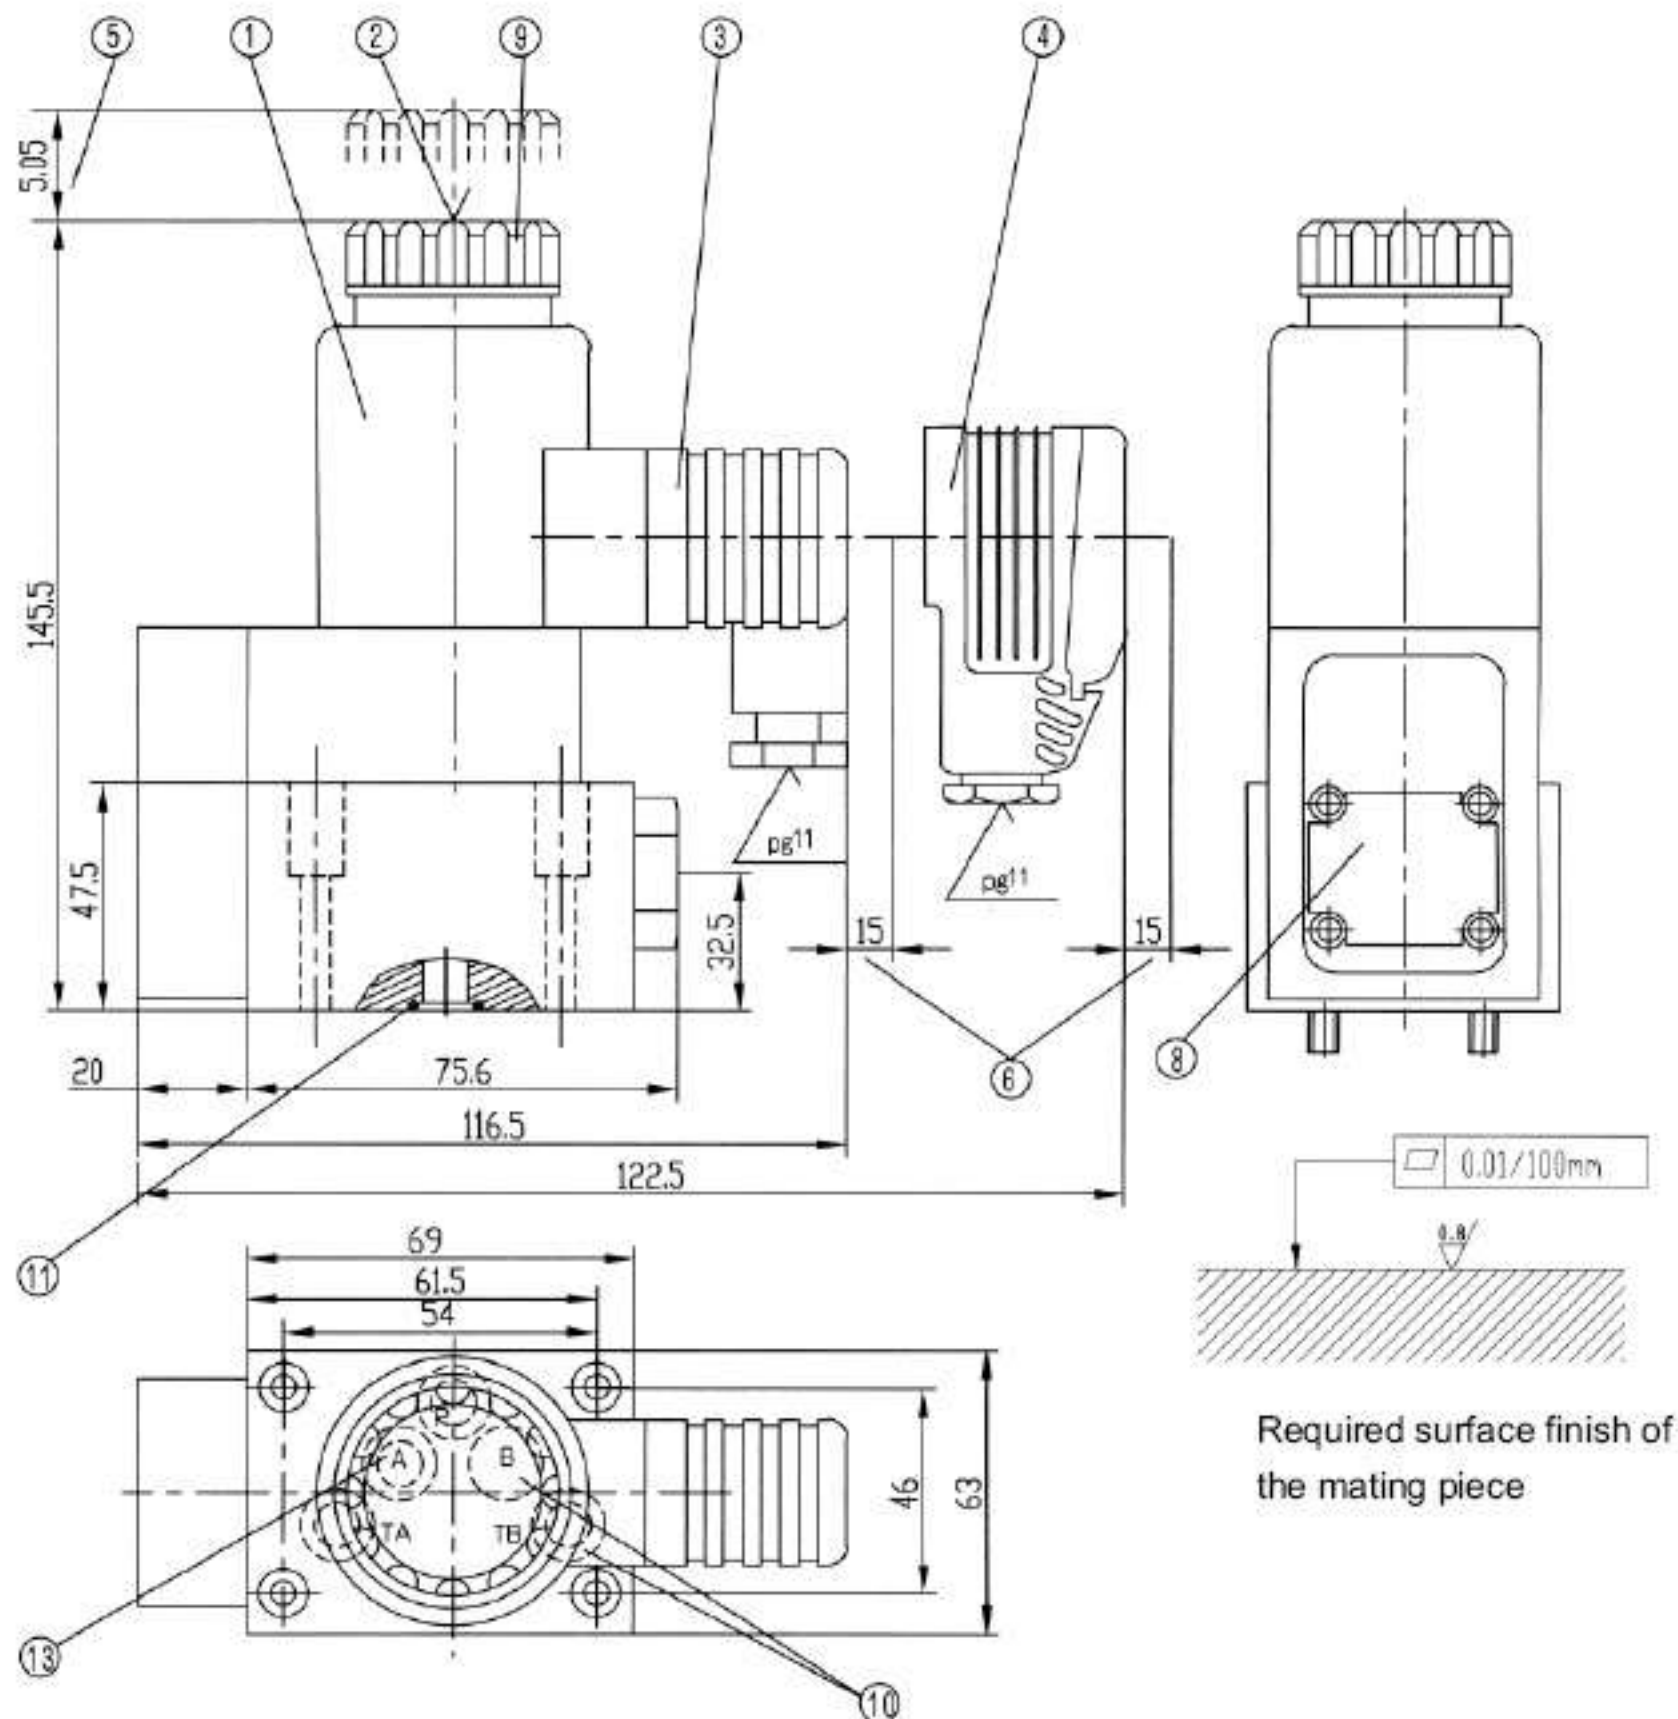


- 1 Solenoid "a" (plug-in connector colour grey)
- 2 Protected hand override "N9"
- 3 Plug-in connector to DIN 43 650 ¹⁾ (may be rotated by 90°)
- 4 Large plug-in connector to DIN 43650 ¹⁾ (may be rotated by 90°)
- 5 Space required to remove the coil
- 6 Space required to remove the plug-in connector
- 8 Nameplate

- 9 Fixing nut, tightening torque $M_A = 4 \text{ Nm}$
- 10 Attention!
On 3/2-way poppet valves ports B and TB for the 42MPa version are blind counter bores and are not present in the 63MPa version.
- 11 O-rings 12 x 2
for ports A, B, TA and TB
O-ring 14 x 1.78
for port P
- 12 Valve fixing screws


- 4 - M6 x 40 DIN 912-10.9 (GB/T70.1-2000), $M_A = 15.5 \text{ Nm}$
- 13 Porting pattern to DIN 24 340 form A, must be ordered separately. ISO 4401 and CETOP-RP 121 H

Subplates:(see page 206)
G66/01(G1/4")
G67/01(G3/8")
must be ordered separately.

1) must be ordered separately, see page 151.

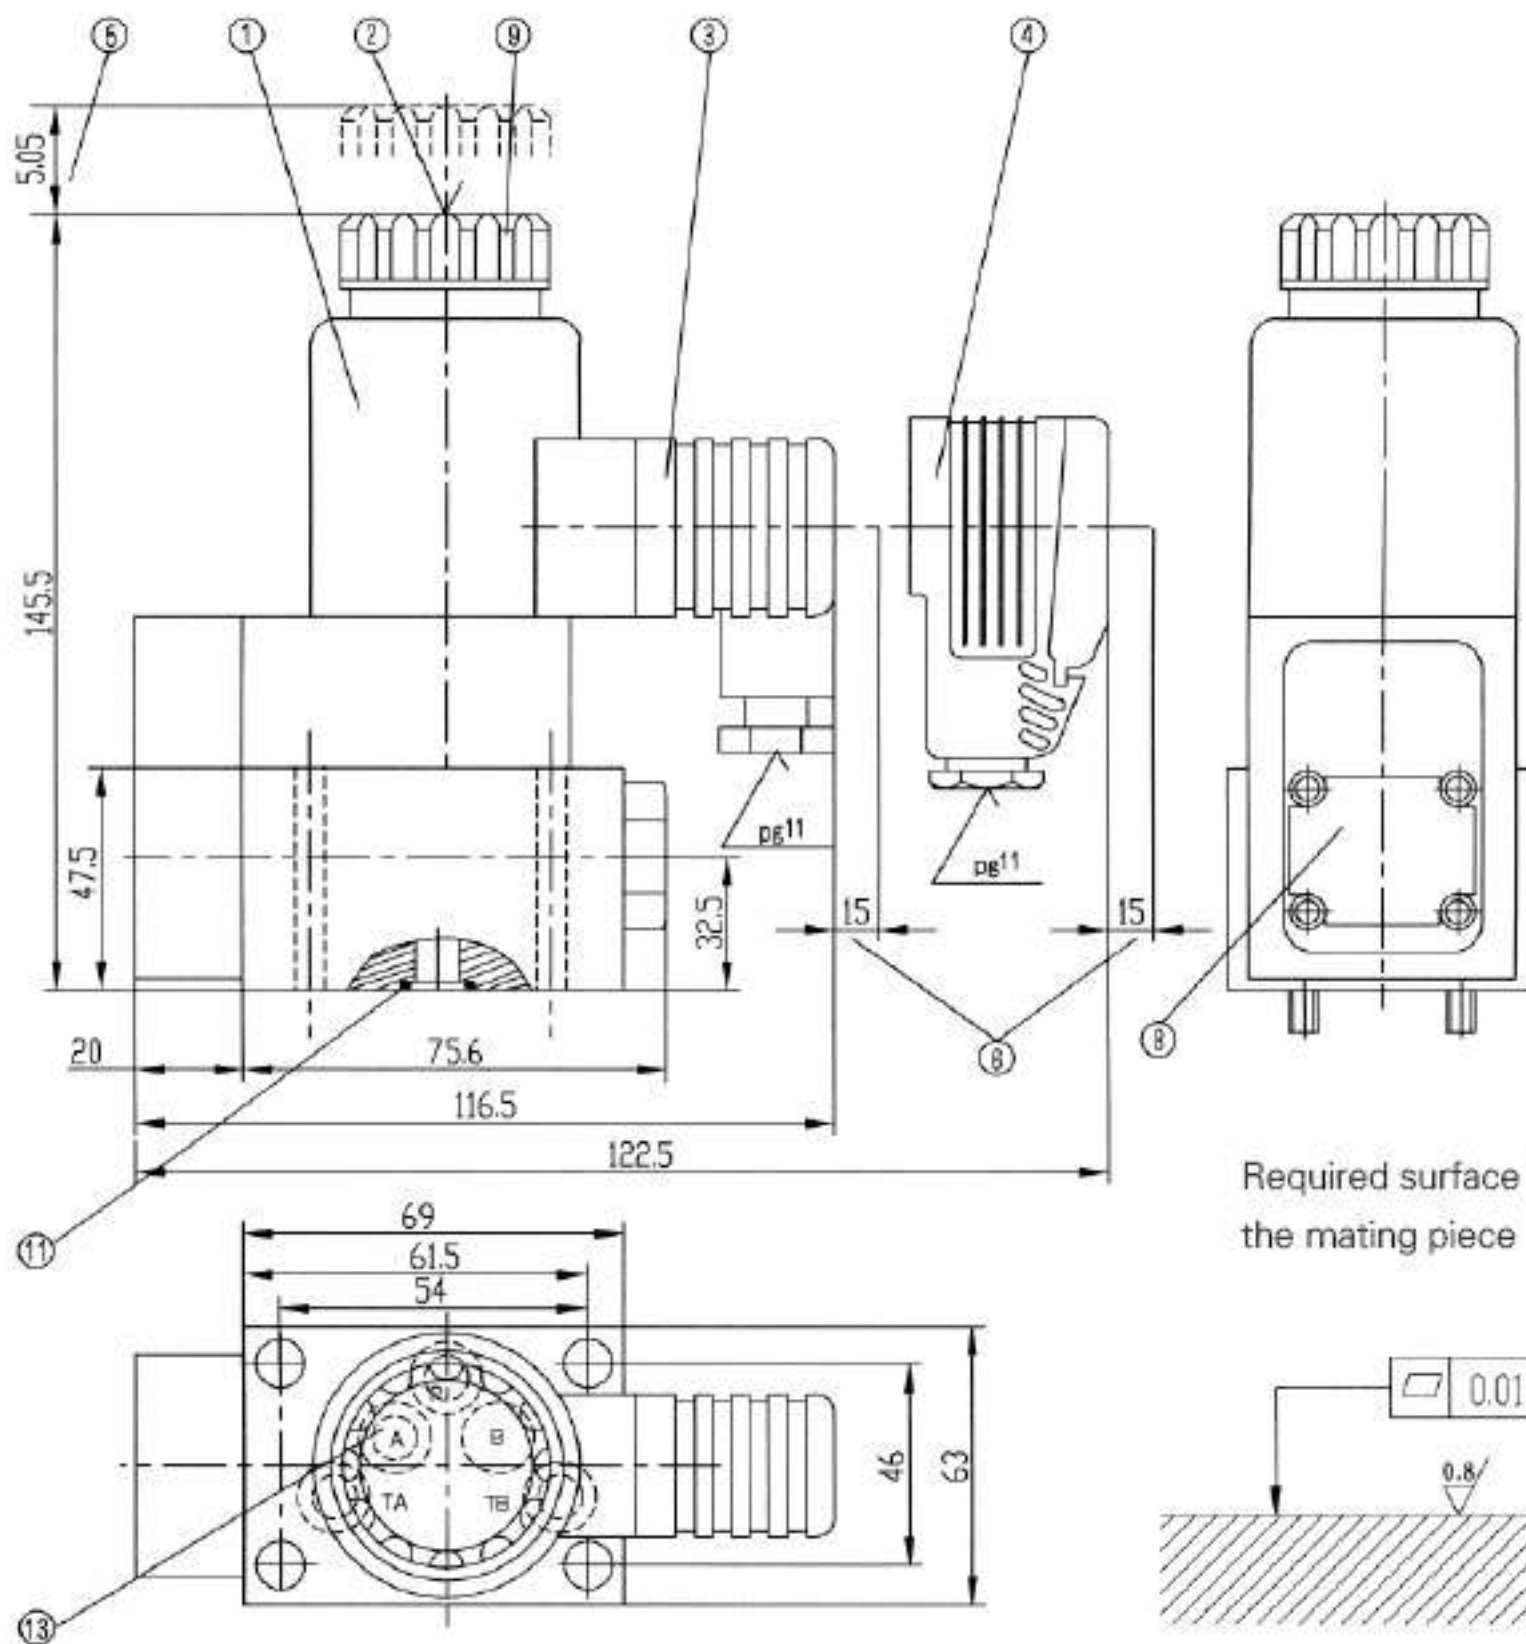

Required surface finish of the mating piece

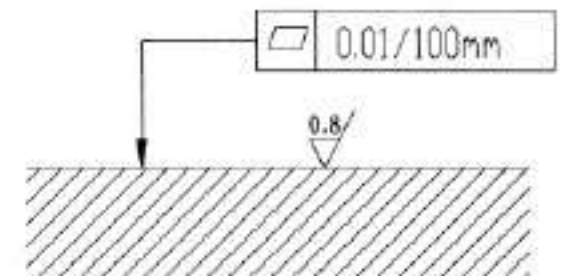

- 1 Solenoid "a" (plug-in connector colour grey)
- 2 Protected hand override "N9"
- 3 Plug-in connector to DIN 43 650 ¹⁾ (may be rotated by 90°)
- 4 Large plug-in connector to DIN 43650 ¹⁾ (may be rotated by 90°)
- 5 Space required to remove the coil
- 6 Space required to remove the plug-in connector


- 8 Nameplate
- 9 Fixing nut, tightening torque $M_A = 4 \text{ Nm}$
- 11 O-rings 12 x 2 for ports A and TA; O-ring 14 x 1.78 for port P
- 12 Valve fixing screws 4 - M8 x 60-10.9 (GB/T70.1-2000)

$M_A = 37 \text{ Nm}$
are included within the scope of supply.


13 Porting pattern to DIN 24 340 form A, ISO 4401 and CETOP-RP 121 H

Subplates
G377/01(G3/8")
G378/01(G1/2")
must be ordered separately.

1) must be ordered separately, see page 151.

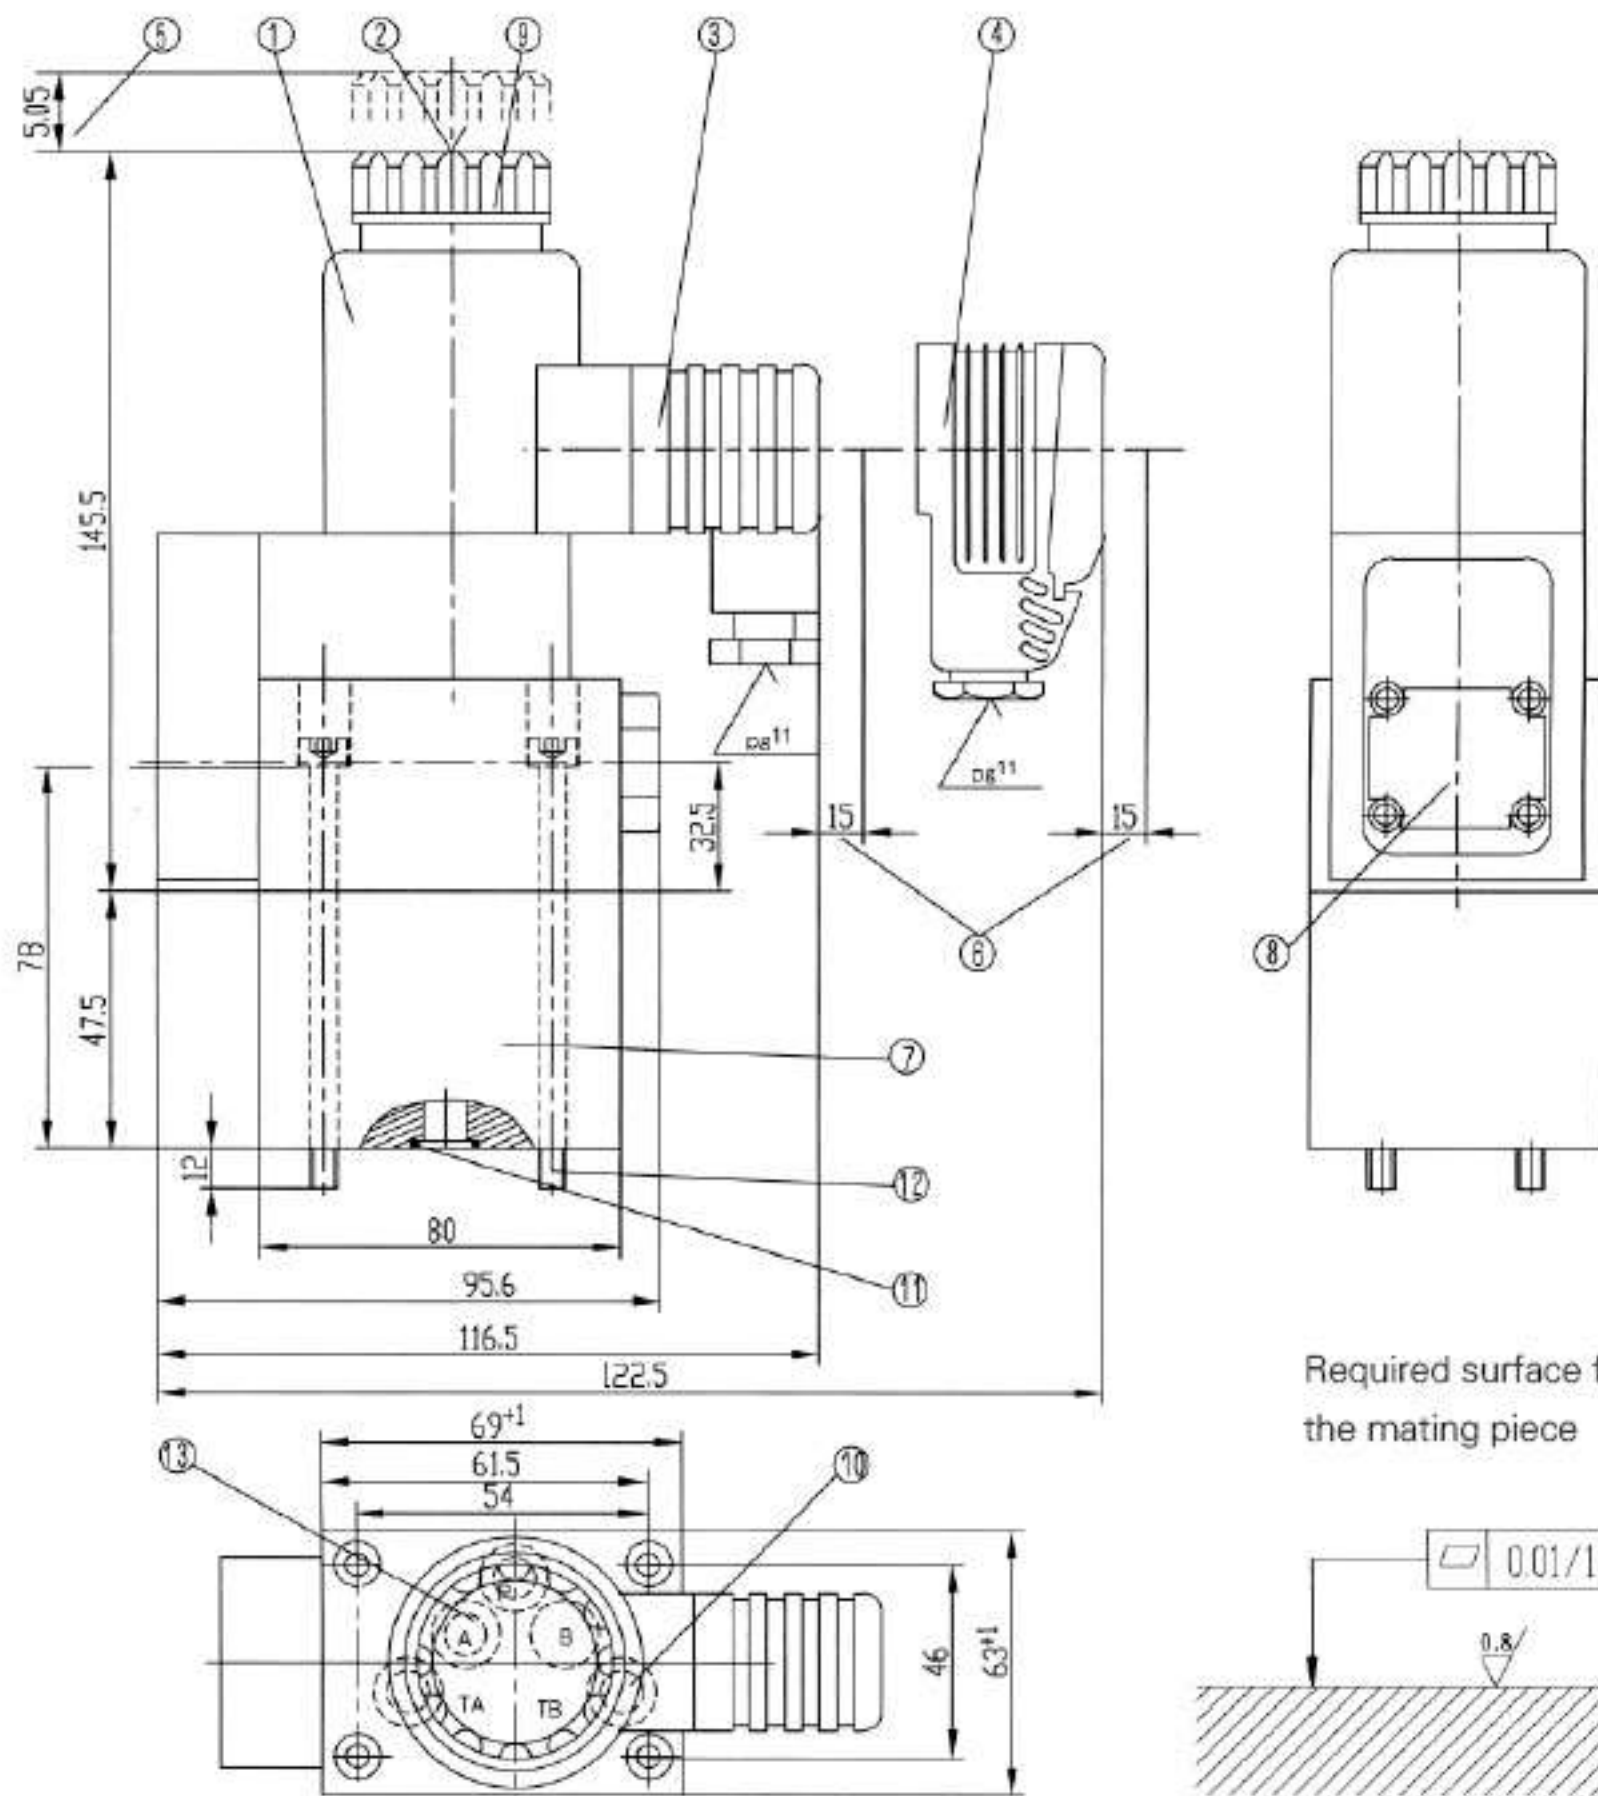

Required surface finish of the mating piece

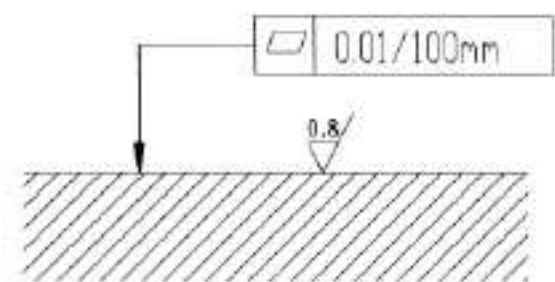


- | | | |
|---|--|--|
| 1 Solenoid "a" (plug-in connector colour grey) | 8 Nameplate | 4 - M6 x 90 - 10.9 (GB/T70.1-2000), $M_A = 15.5$ Nm are included within the scope of supply. |
| 2 Protected hand override "N9" | 9 Fixing nut, tightening torque $M_A = 4$ Nm | |
| 3 Plug-in connector to DIN 43 650 ¹⁾ (may be rotated by 90°) | 10 Attention! | |
| 4 Large plug-in connector to DIN 43650 ¹⁾ (may be rotated by 90°) | On the 4/2-way poppet valves port TB is a blind counterbore. | 13 Porting pattern to DIN 24 340 form A, ISO 4401 and CETOP-RP 121 H |
| 5 Space required to remove the coil | 11 O-rings 12 x 2 for ports A, B, TA and TB | |
| 6 Space required to remove the plug-in connector | O-ring 14 x 1.78 for port P | Subplates G377/01(G3/8") G378/01(G1/2") must be ordered separately. |
| 7 Plus-1-Platte | 12 Valve fixing screws | |


1) must be ordered separately, see page 151.

Unit dimensions: 4/2-way poppet valve (63 MPa version)

(Dimensions in mm)

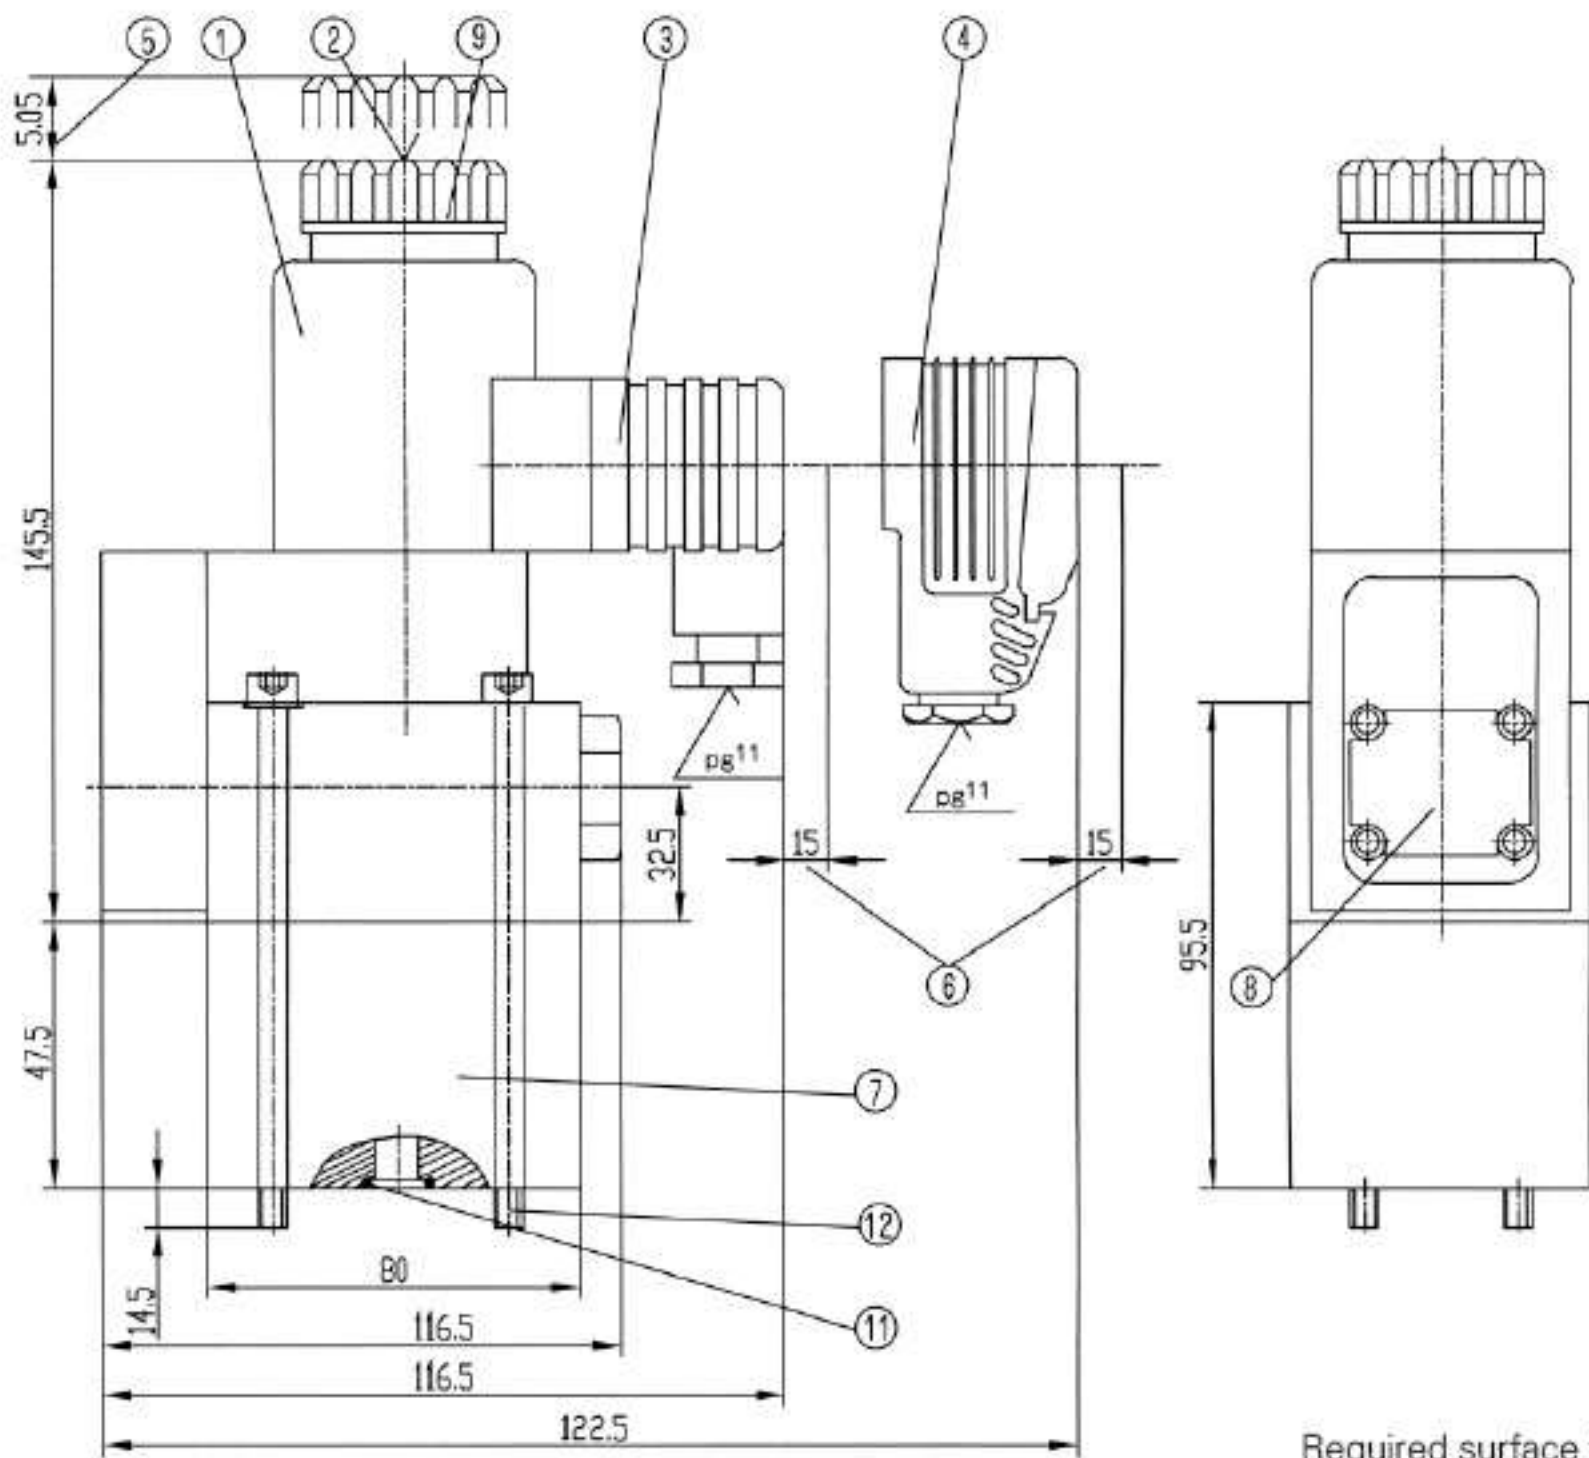

Required surface finish of the mating piece

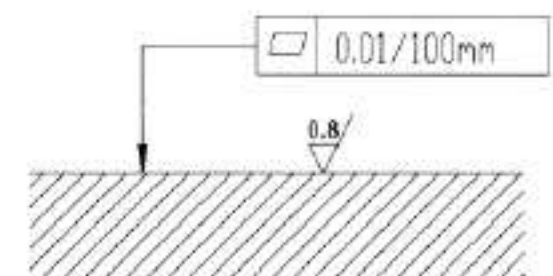

- 1 Solenoid "a" (plug-in connector colour grey)
- 2 Protected hand override "N9"
- 3 Plug-in connector to DIN 43 650 ¹⁾ (may be rotated by 90°)
- 4 Large plug-in connector to DIN 43650 ¹⁾ (may be rotated by 90°)
- 5 Space required to remove the coil
- 6 Space required to remove the plug-in connector

- 7 Plus-1 plate
- 8 Nameplate
- 9 Fixing nut, tightening torque $M_A = 4 \text{ Nm}$
- 11 O-rings 12 x 2 for ports A,B and TA
O-ring 14 x 1.78 for port P
- 12 Valve fixing screws 4 - M8 x 110-10.9 (GB/T70.1-2000),

- $M_A = 37 \text{ Nm}$ are included within the scope of supply.
- 13 Porting pattern to DIN 24 340 form A, ISO 4401 and CETOP-RP 121 H


Subplates
G 377/01 (G3/8")
G 378/01 (G1/2")
must be ordered separately.

1) must be ordered separately, see page 2.

Application examples

These examples serve only to explain the possibilities offered by the poppet valve. They do not include the complete function.

Symbol "C"

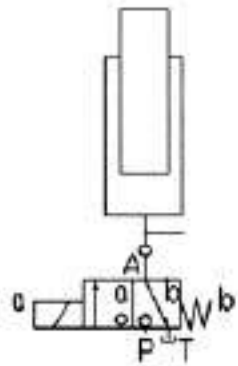


2/2-way circuit with a two poppet valve and check valve at port A

The check valve must be installed in the pipe work.
Initial position: Flow blocked, maximum pressure permissible. Pressure is held in the actuator, even when the pump is switched off, due to the check valve at port A.

Switched position: Free-flow, maximum pressure permissible. Leakage drained via port T. The only leakage occurring is that which flows to T during the switching process.

Symbol "C"

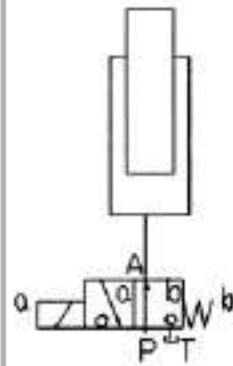


3/2-way circuit with a single poppet valve

Initial position: Lifting

Holding only due to limitation of travel and pressure in port P.

Switched position: Lowering

Symbol "U"

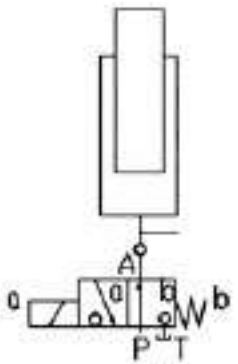


2/2-way circuit with a single poppet valve and check valve at port A

The check valve must be fitted in the pipe work.
Initial position: Free-flow, maximum pressure permissible. Pressure is held in the actuator, even when the pump is switched off, due to the check valve at port A.

Switched position: Flow blocked, maximum pressure permissible. Leakage drained via port T. The only leakage occurring is that which flows to T during the switching process.

Symbol "C"

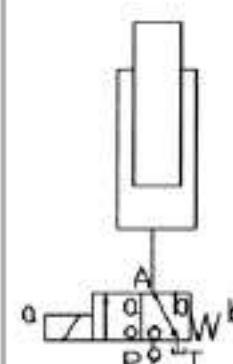

3/2-way circuit with a two poppet valve and cartridge check valve in port P


The check valve is fitted in the P port of the 3/2-way poppet valve.

Initial position: Lowering

Switched position: Lifting

The load can be held in any position while the pump is switched off and the solenoid energized.

Symbol "C"

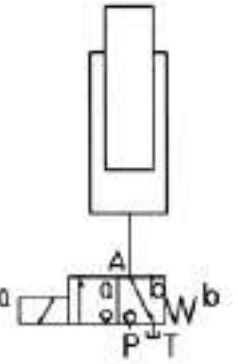


3/2-way circuit with a two poppet valve

Initial position: Lowering

Switched position: Lifting

Holding only due to limitation of travel and pressure in port P.

Symbol "U"

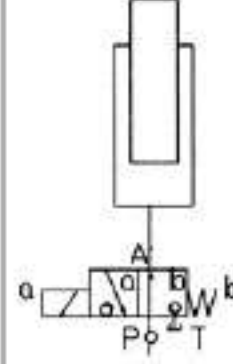

3/2-way circuit with a single poppet valve and cartridge check valve in port P


The check valve is fitted into the P port of the 3/2-way poppet valve.

Initial position: Lifting

The load can be held in any position while the pump is switched off.

Switched position: Lowering

Symbol "C"

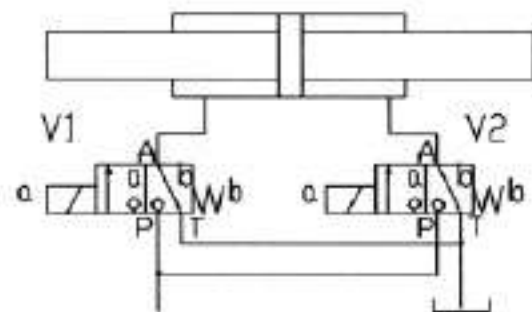

4/3- (4/4-) way circuit with a 2 two poppet valves

V1 and V2 in the initial position: Both cylinder sides are connected to the tank port.

V2 in the switched position: The piston moves to the left

V1 in the switched position: The piston moves to the right


V1 and V2 in the switched position: Both cylinders sides are connected to the pump port.

Rapid traverse is possible when a single rod cylinder with an area ratio of 2 : 1, is used.

Attention!

When using single rod cylinders, the performance limit (double flow) and the maximum permissible operating pressure (pressure intensification) of the valve must be taken into account.

Symbol "U"

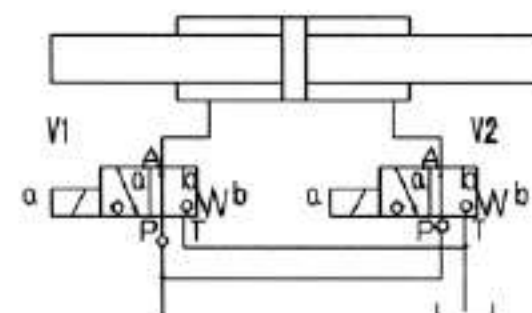

4/3- (4/4-) way circuit with a 2 two poppet valves and cartridge check valve in port P of the 3/2-way poppet valves

V1 and V2 in the initial position: The piston is locked externally to prevent movement.

V2 in the switched position: The piston moves to the right

V1 in the switched position: The piston moves to the left

V1 and V2 in the switched position: Both cylinder sides are connected to the tank port.


Attention!

When using single rod cylinders, the performance limit (double flow) and the maximum permissible operating pressure (pressure intensification) of the valve must be taken into account!


BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional valves electro-hydraulically operated			RE24750/12.2004
	Size10 to 32	up to 28/35 MPa	up to 1 100 L/min	Replaces: RE 24750/05.2001

Features:

- Valves used to control the start, stop and direction of a fluid flow
- Electro-hydraulic operation (WEH), hydraulic operation (WH)
- For subplate mounting
- Spring or pressure-centred, spring or hydraulic offset
- Wet-pin DC or AC solenoids, optional
- Manual override, optional
- Electrical connection as individual or central connection
- Shifting time adjustment, optional
- Pre-load valve in the P-channel of the main valve, optional
- Auxiliary equipment to data sheet
- Stroke adjustment at main spool, optional
- Stroke adjustment and/or end position indicator, optional
- Mechanical or inductive limit switch (proximity type) at the main spool, optional
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H

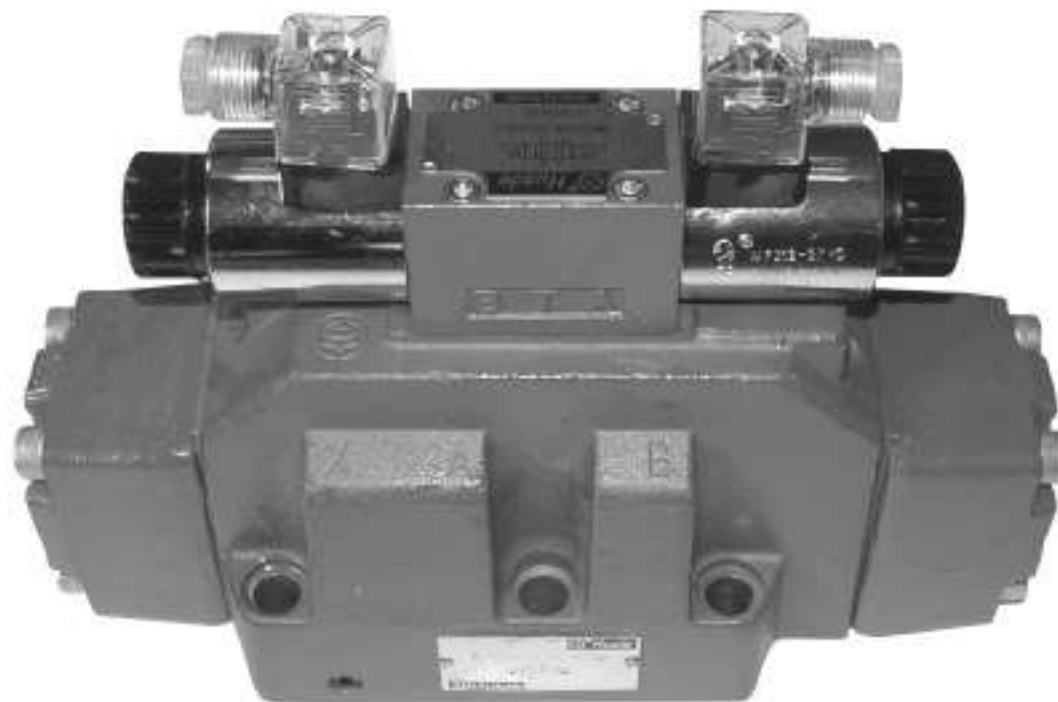

Functional description, section

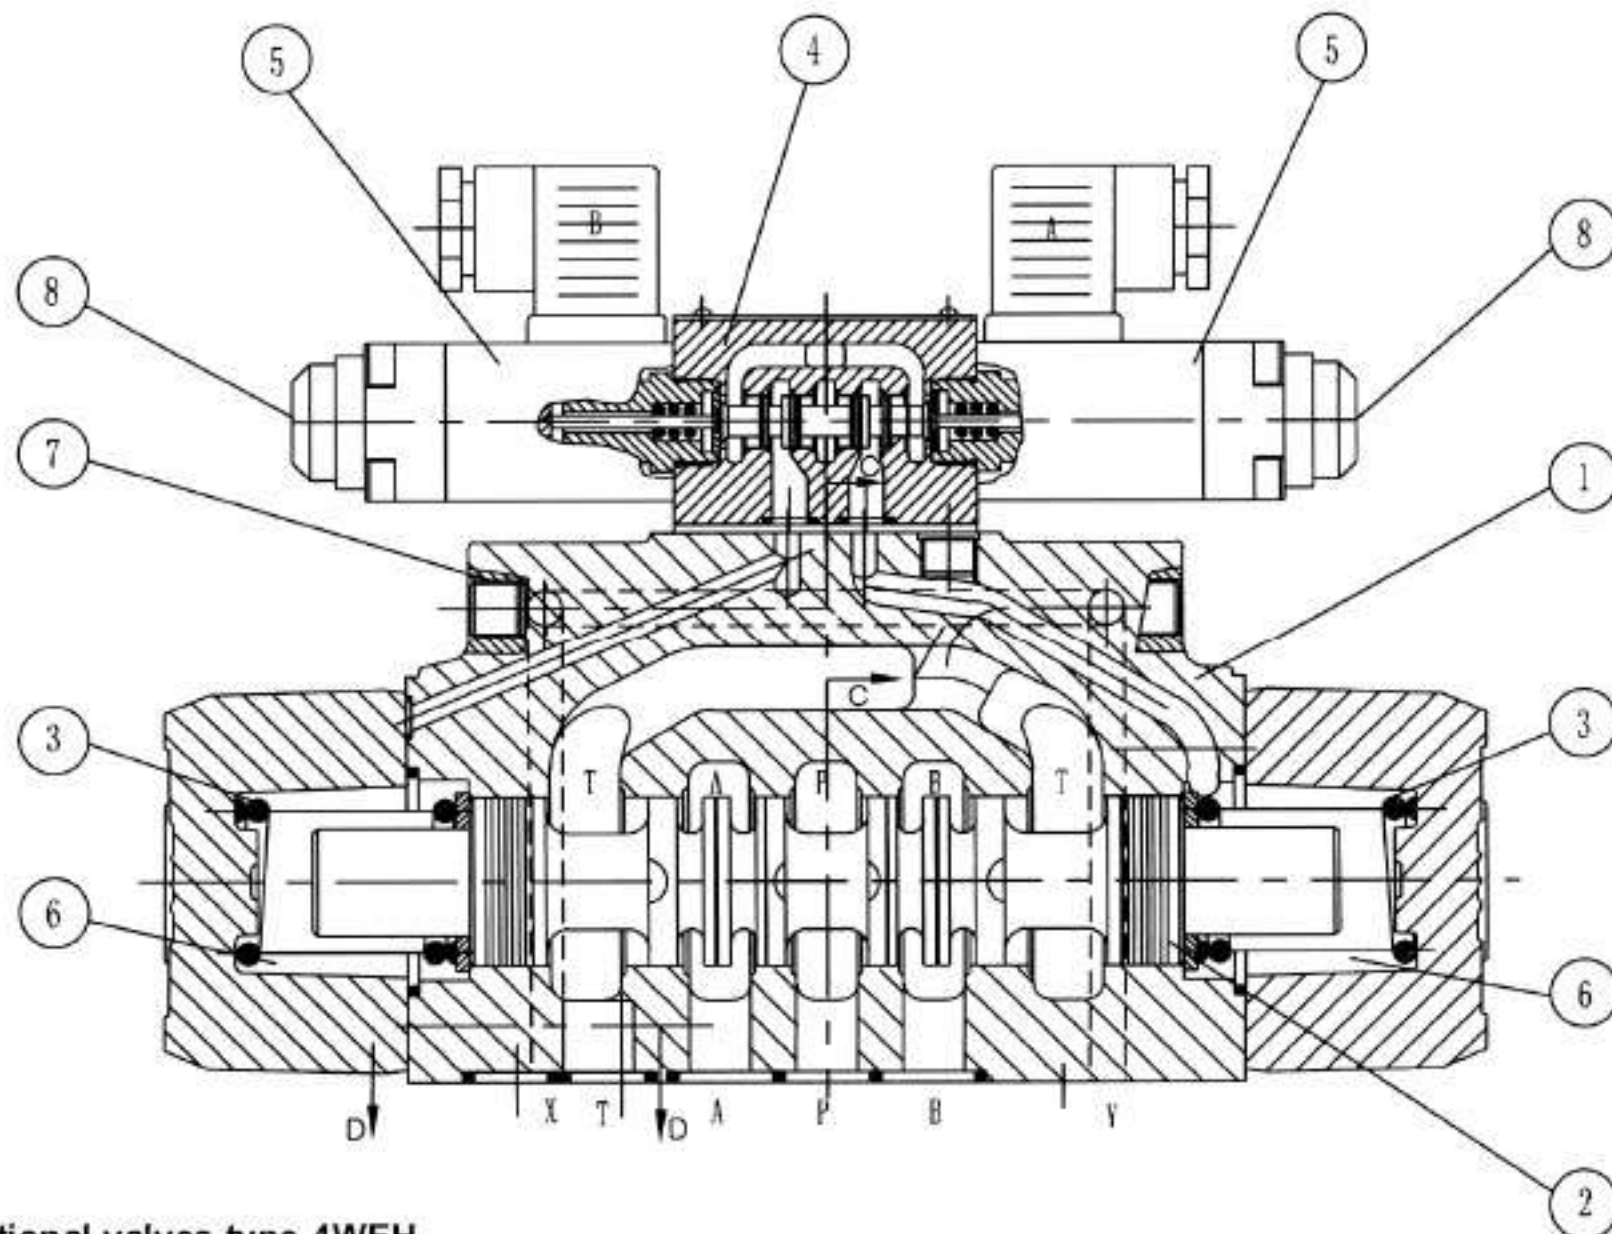

Directional valves type 4WEH...

Valves of type WEH are directional spool valves with electro-hydraulic operation.

The directional valves basically consist of the main valve with housing (1), main control spool (2), one or two return springs, and the pilot valve (4) with one or two solenoids.

The main control spool (2) in the main valve is held in the neutral or in the initial position either by the springs

or by means of pressure. The pilot oil supply can be either internal or external (external via port X). The pilot oil is expelled from the spring chamber via the pilot valve into the Y channel. The pilot oil supply and drain are internal or external (external via port Y).

4/3-way directional valve with spring centring of the control spool, type 4WEH...


In this model, the main control spool (2) is held in the neutral position by two return springs. The two spring chambers (6) are connected to ports X and Y via the connector plate. When one of the two ends of the main control spool (2) is pressurized with pilot pressure, the

spool is moved to the shifted position. The required ports in the valve are then opened to flow. When the pilot pressure is removed, the spring on the opposite side to the pressurised spool area causes the spool to return to its neutral or initial position.

4/3-way directional valve with pressure centring of the main control spool, type 4WEH...H

The main control spool (2) in the main valve is held in the neutral position by pressurization of the two front faces. A centring sleeve is supported in the housing and holds the spool in position.

By removing the pressure from one of the spool ends, the main control spool (2) is moved to the shifted position. The unloaded spool area displaces the returning pilot oil via the pilot valve into the Y channel (external).

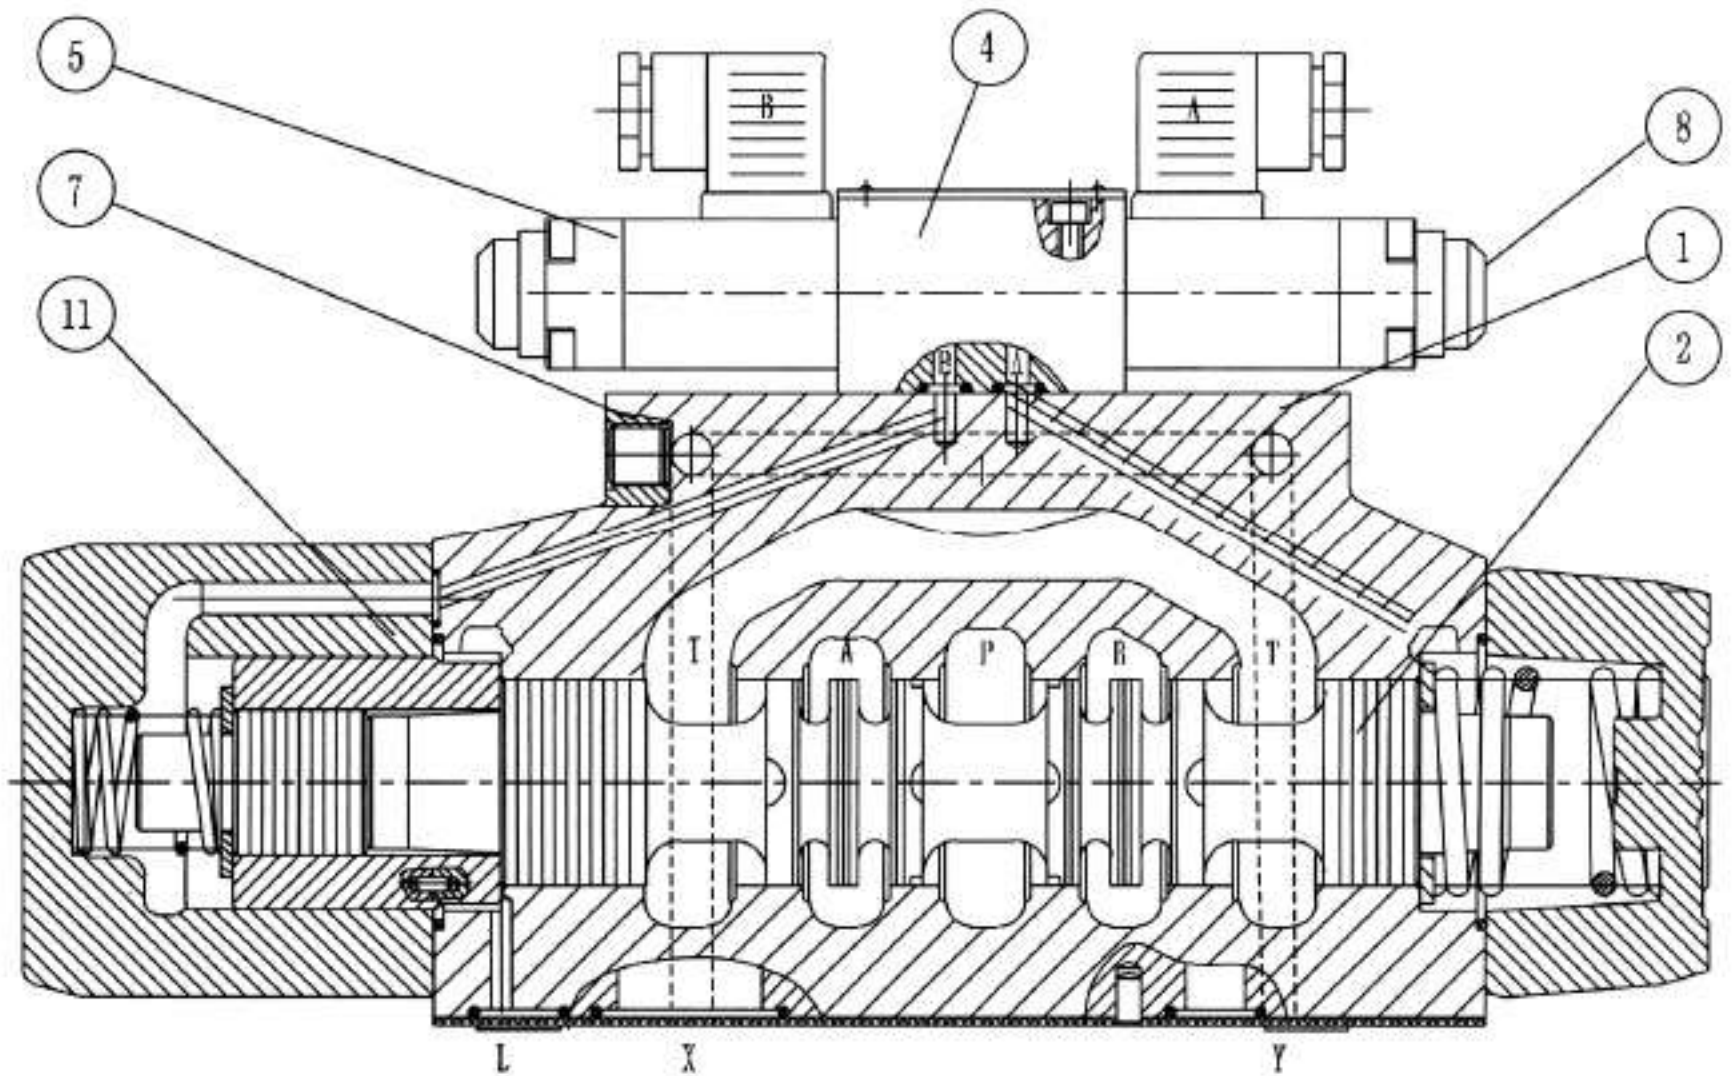

Type WEH...H.../...

Directional valves type 4WH...


Valves of type WH are directional spool valves with hydraulic operation.

They control the start, stop and direction of a fluid flow. The directional valves basically consist of the valve housing(1),the main control spool(2), one or two return springs(3) and in the case of valves with spring return

or spring centring, and the pilot connecting plate .

The control spool(2) is operated directly by means hydraulic pressure.

The control spool(2) is held in the neutral or in the initial position either by springs or by means of pressure. Pilot oil supply and pilot oil drain are external .

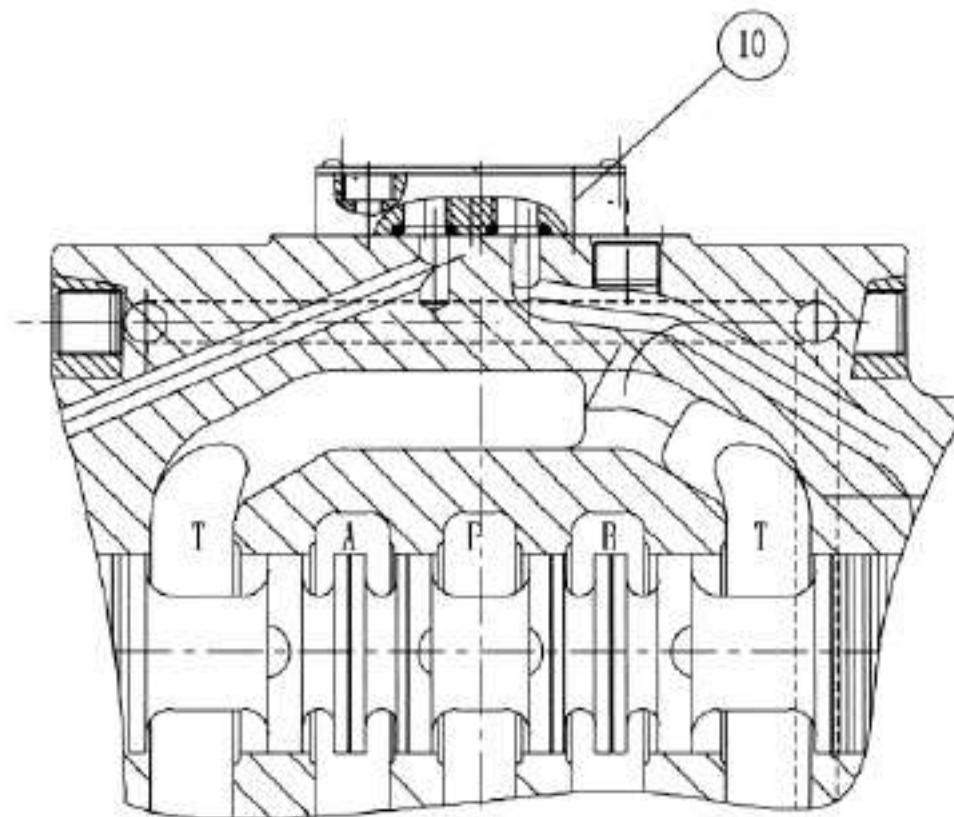

Type WH...

Pilot oil supply

4WEH- ...and 4WH...

The pilot oil supply is sourced externally via channel X from a separate circuit.

The pilot oil drain is led externally via channel Y to tank.

4WEH...E...

The pilot oil supply is sourced internally from channel P of the main valve.

The pilot oil drain is led externally via channel Y to tank. Port X in the subplate is plugged.

Change over from external to internal or from internal to external pilot oil supply (size 16): Remove the cover on the solenoid side "a", remove the plugs and turn end-for-end, insert plugs and re-place the cover.

4WEH...ET...

The pilot oil supply is sourced internally from channel P of the main valve.

The pilot oil drain is led internally via channel T to tank. Ports X and Y in the subplate are plugged.

4WEH...T...

The pilot oil supply is sourced externally via channel X from a separate circuit. The pilot oil drain is led internally via channel T to tank. Port Y in the subplate is plugged.

1 Plug screw M6-8.8 pilot oil drain

2 Plug screws M6-8.8 pilot oil supply

3 Plug screws M8-8.8 for external sealing

Tightening torques M_A for cover fixing screws:

Size 16: 35 Nm

Size 25: 68 Nm

Tightening torque M_A for pilot valve fixing screws:

Sizes 10 to 32: 9 Nm

Size 10 main valve

Pilot oil supply

external: 2 plugged

internal: 2 open

Pilot oil drain

external: 1 plugged

internal: 1 open

Size 16

Pilot oil supply


external: 2 plugged

internal: 2 open

Pilot oil drain

external: 1 plugged

1 open

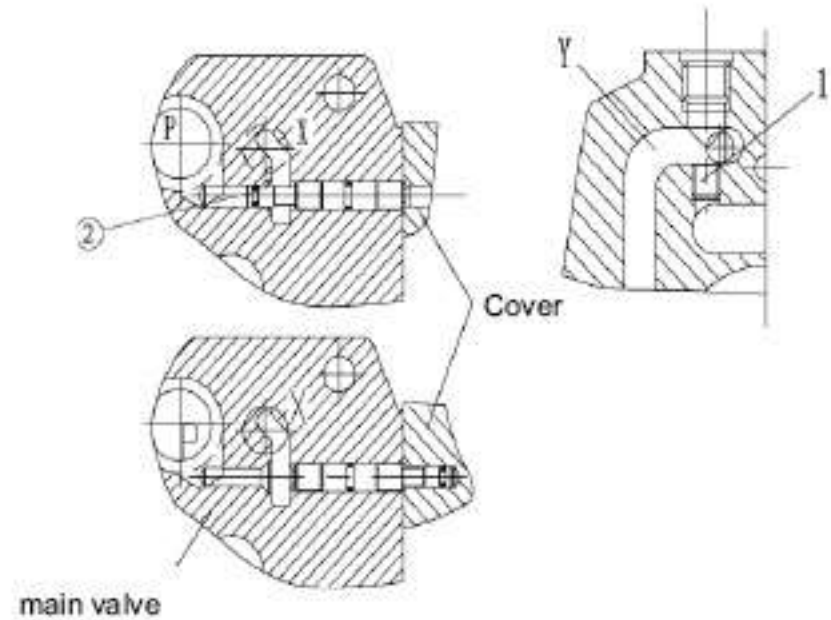

Size 25

Pilot oil supply

external: 2 plugged

internal: 2 open


Pilot oil drain

external: 1 plugged

internal: 1 open

Size 32

Pilot valve

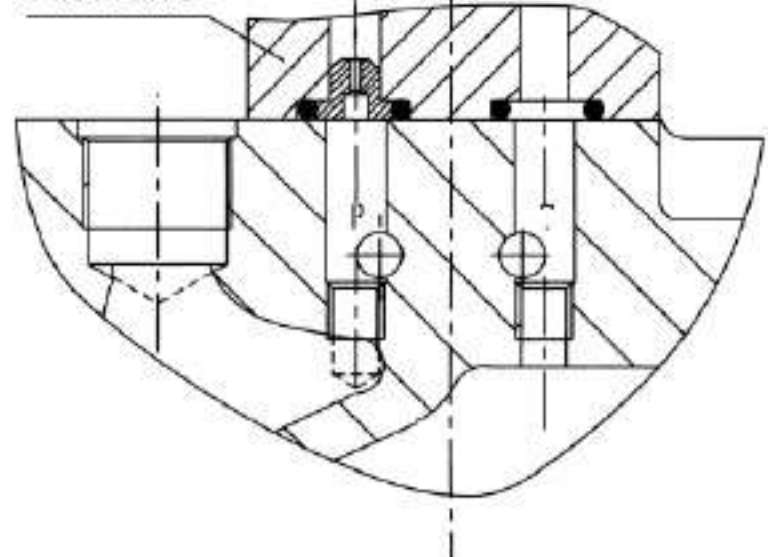


Pilot oil supply
external: 2 plugged
internal: 2 open



Pilot oil drain
external: 1 plugged
internal: 1 open

Throttle insert

The use of a throttle insert is required if the pilot oil supply in the P channel of the pilot valve is to be limited. This throttle is inserted in the P channel of the pilot valve.

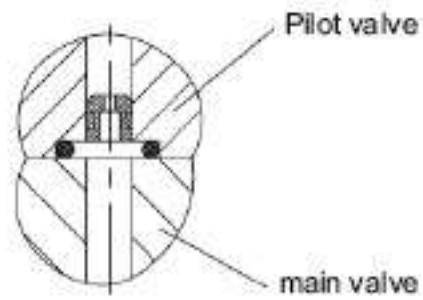


Throttle insert

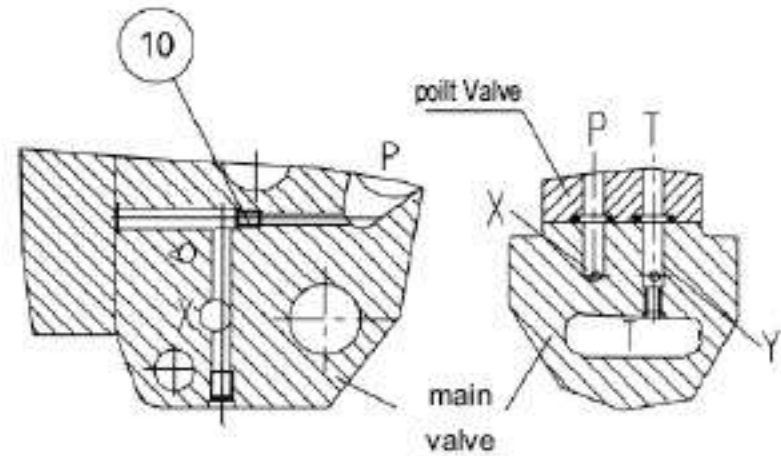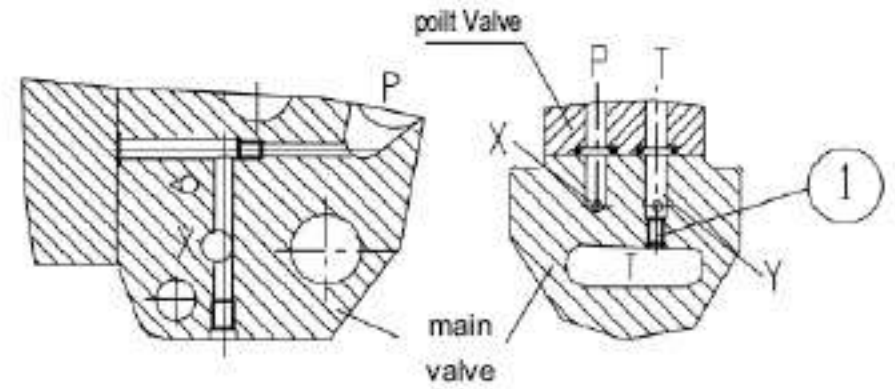

Shifting time adjustment

In order to influence the shifting time of the main valve a double throttle check valve (type Z2 FS 6) is installed.

Change over from meter-in (13) to meter-out control (12): Remove the pilot valve (4) (leave the O-ring support plate (21) in place), rotate the throttle check valve (11) about its longitudinal axis and refit it, replace the pilot valve (4).

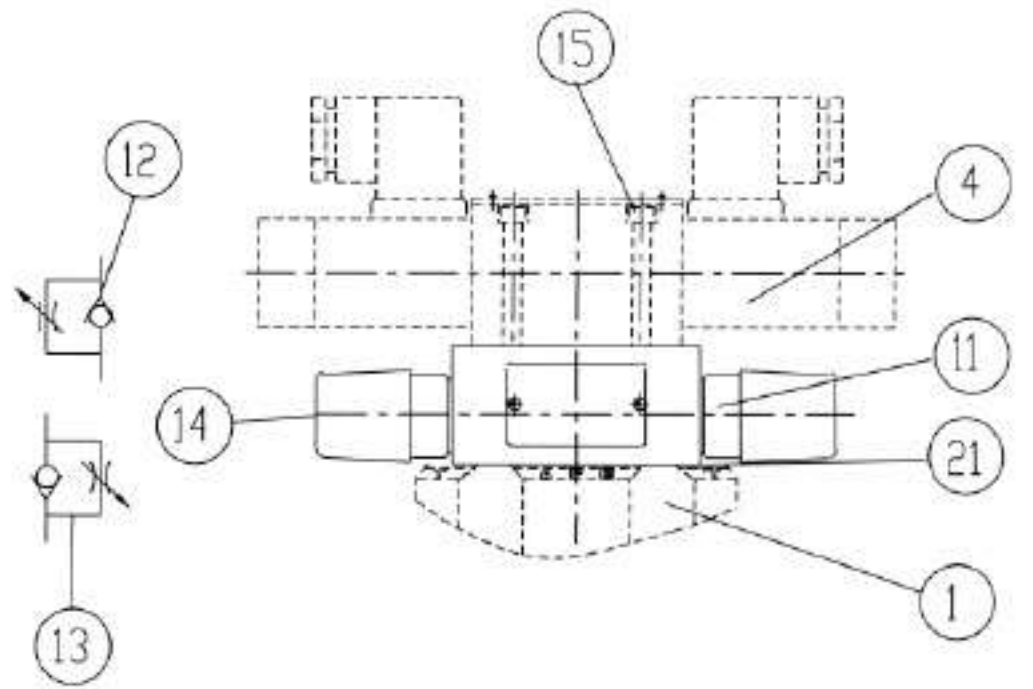

Type WEH.../...S


Pressure reducing valve "D3"

The pressure reducing valve (17) must be used if the pilot pressure is higher than 25 MPa.

Thus, the secondary pressure is held constant at 4.5 MPa.

Attention!


When using a pressure reducing valve "D3" (17), a throttle insert "B10" must be installed in the P channel of the pilot valve.

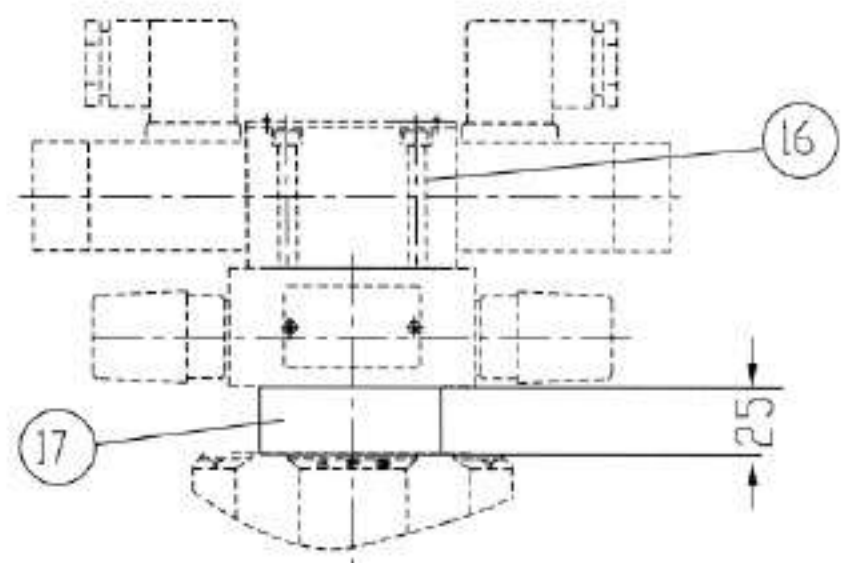




Type WEH.../...S..D3

Pre-load valve (not for size 10)






In valves with pressureless by-pass and internal pilot oil supply, a pre-load valve (18) must be installed in the P channel of the main valve to build up the minimum pilot pressure. The pressure difference of the pre-load valve must be added to the pressure difference of the main valve (see characteristic curve) in order to determine the actual value. The cracking pressure of this valve is approx. 0.45 MPa.

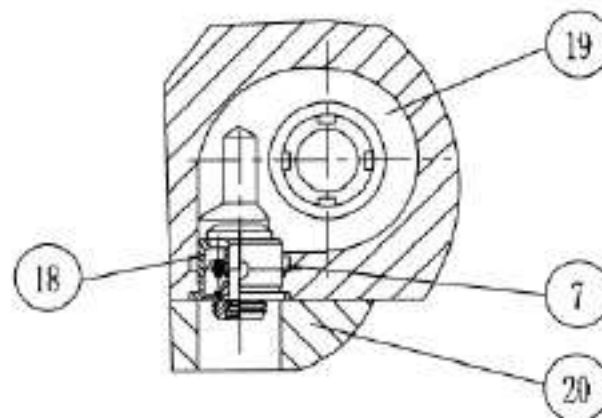

Dp/q_v characteristic curve

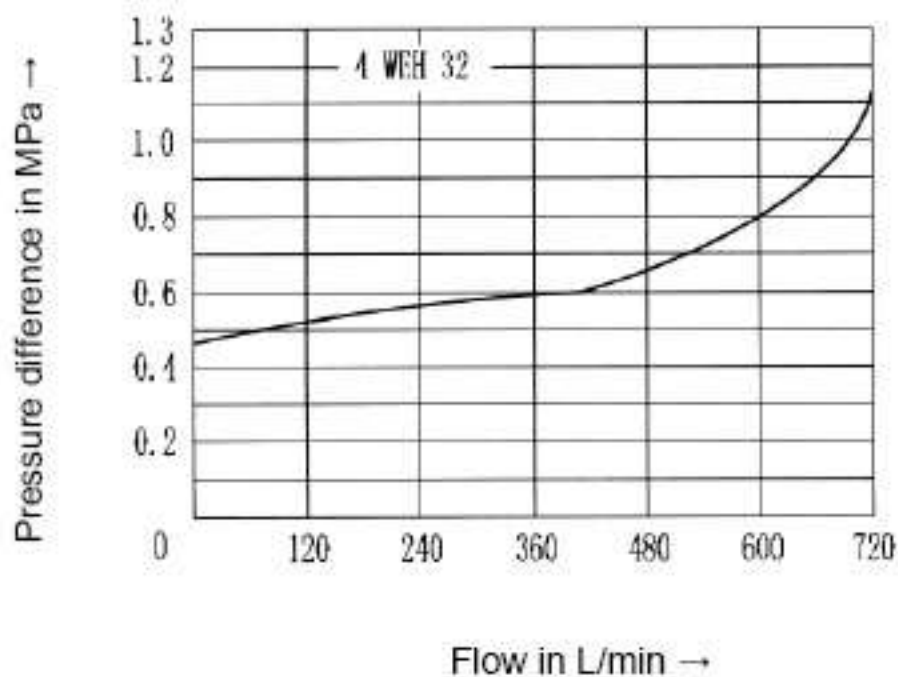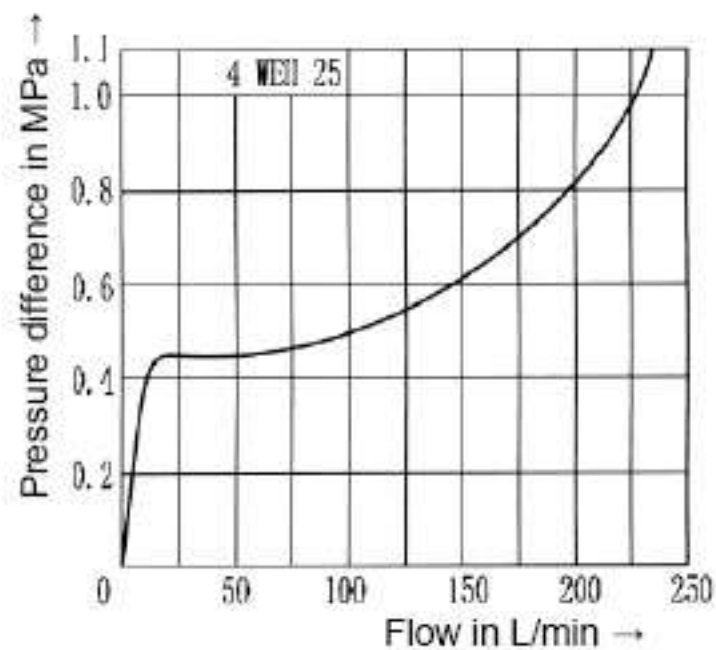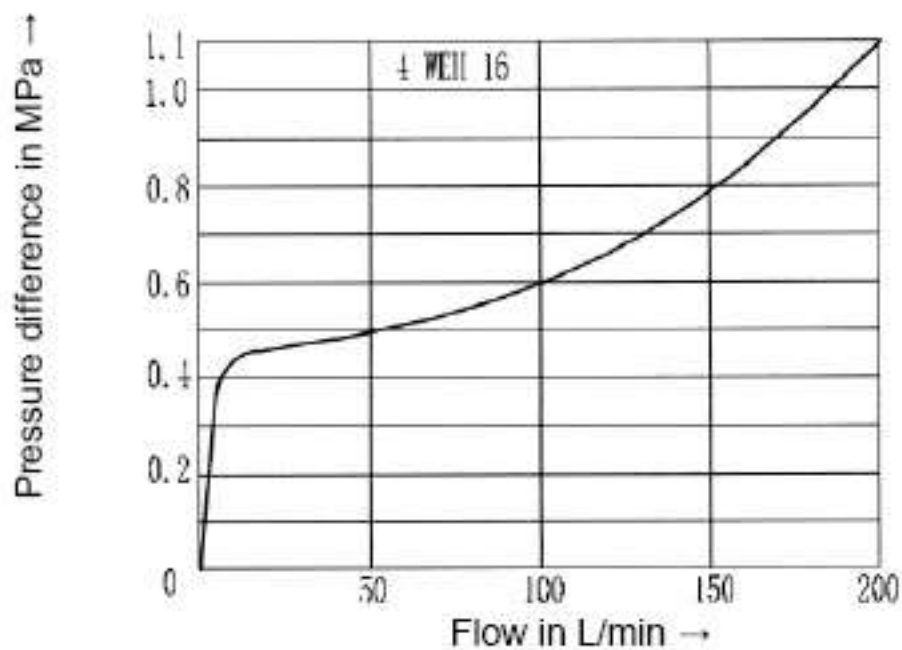

Symbols

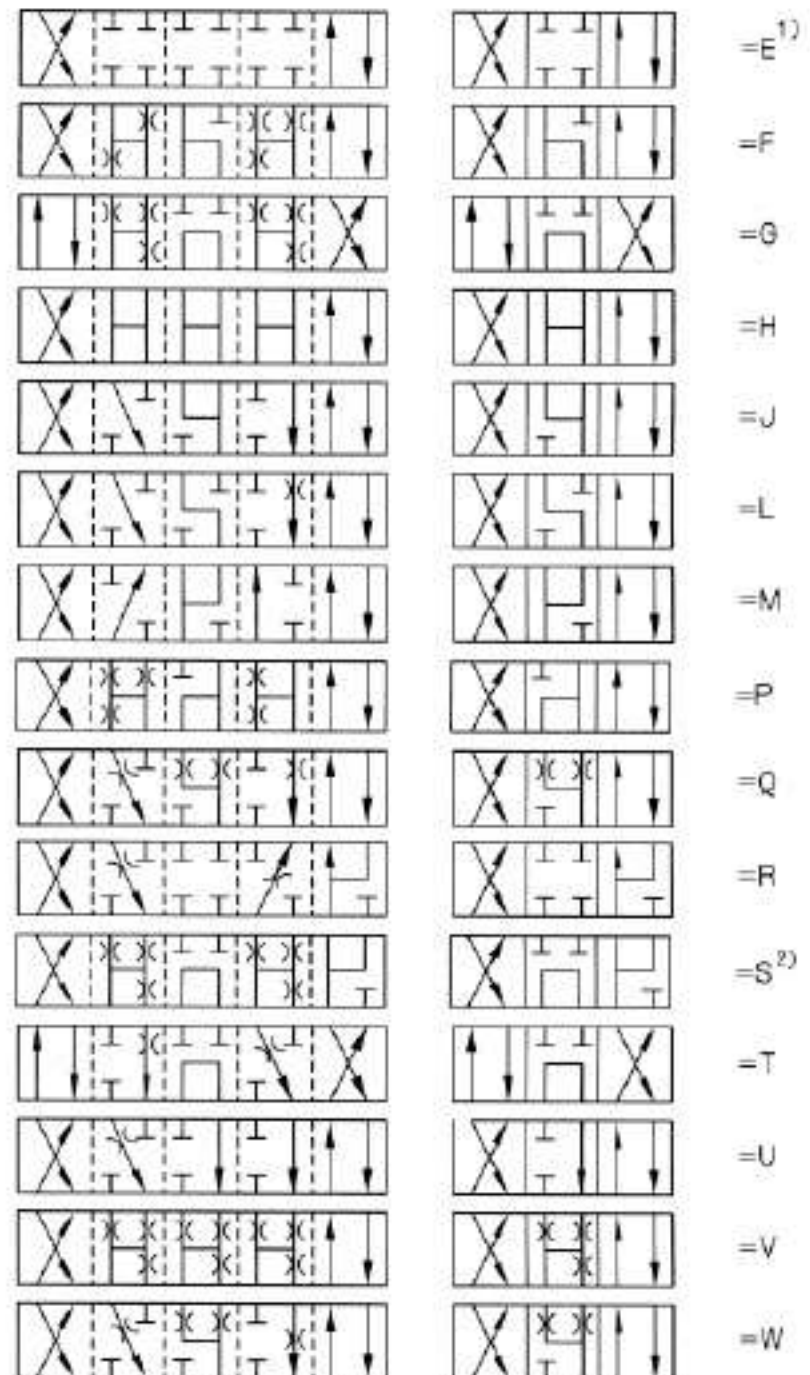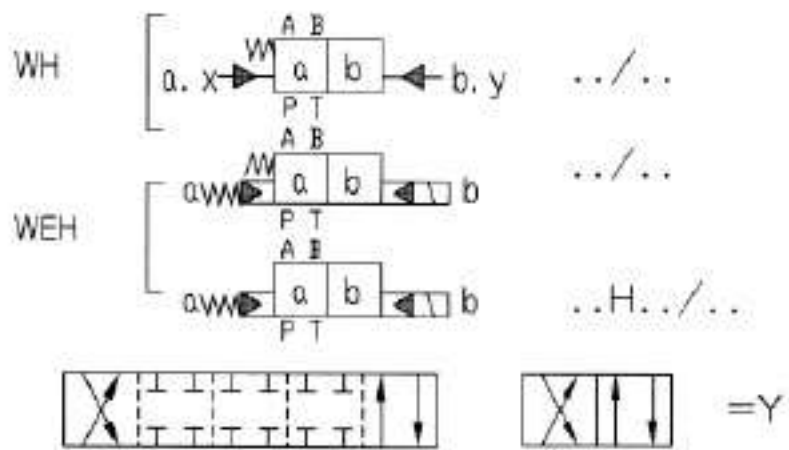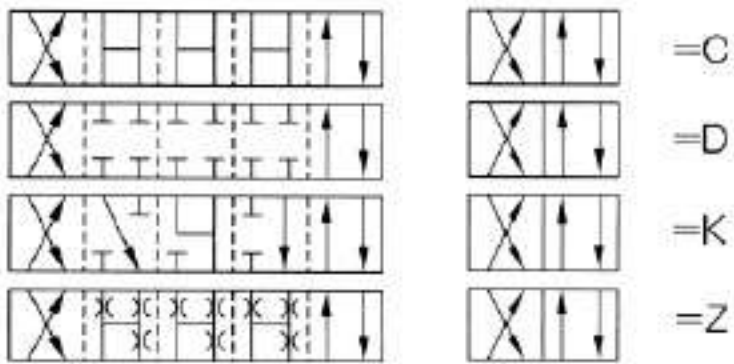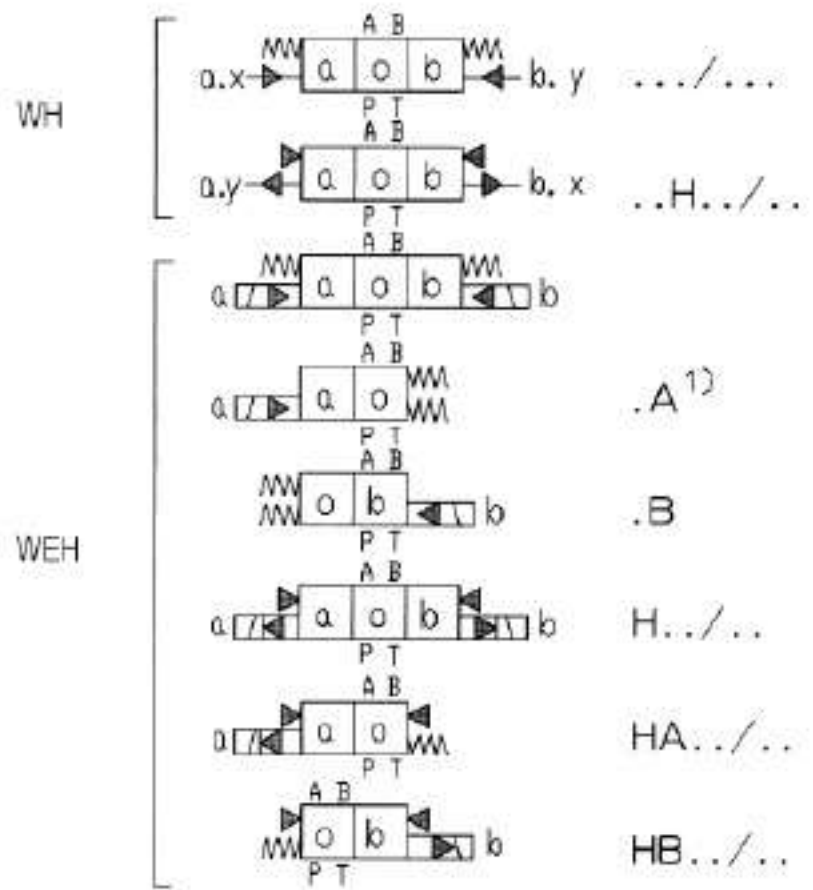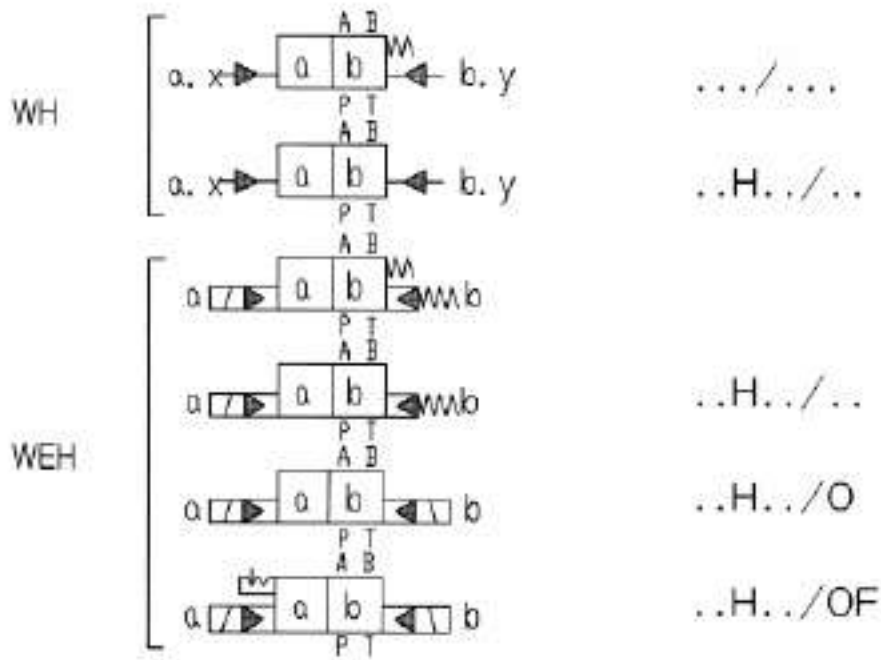

1) Example: Spool E, solenoid on side "a" Order example:

H-4WEH 16 HEA6X/6AG24N9ETSK4..B10..V..

2) Spool S only used for size 16

Valve opening in neutral position for spools Q, V and W

Size Spool		Valve opening in neutral position (Size in mm ²)			
		10	16	25 (type 4W.H 25.50B/)	32
Q	P-A	-	-	-	-
	P-B	-	-	-	-
	A-T	13	32	83	78
	B-T	13	32	83	78
V	P-A	13	32	83	73
	P-B	13	32	83	73
	A-T	13	32	83	84
	B-T	13	32	83	84
W	P-A	-	-	-	-
	P-B	-	-	-	-
	A-T	2.4	6	14	20
	B-T	2.4	6	14	20

Detailed and simplified symbols for 3-position valves

	Valve with spring-centred neutral position	Valve with spring-centred neutral position {only sizes 16, 25 (type 4W.H 25 .50B/... and 32)}
X = external; Y = external	<p>Type 4WEH.../..</p>	<p>Type 4WEH..H.../..</p>
X = internal; Y = external	<p>Type 4WEH.../..E..</p>	<p>Type 4WEH..H.../..E..</p>
X = internal; Y = internal	<p>Type 4WEH.../ET</p>	<p>3-position valves, pressure-centred, preferably with external pilot oil supply and/or drain (No code, E)</p> <p>For the preconditions for internal pilot oil supply and/or drain (ET, T) see page 6 or 10.</p>
X = external; Y = internal	<p>Type 4WEH.../..T..</p>	

Detailed and simplified symbols for 2-position valves

		Valves with spring offset		Valves with hydraulic offset		
X = external; Y = external	Type 4WEH.../... 	Type 4WEH...H.../... 	Type 4WEH...H/O... 	Type 4WEH...H/OF... 		
	X = internal; Y = external	Type 4WEH.../...E... 	Type 4WEH...H.../...E... 	Type 4WEH...H/O...E... 	Type 4WEH...H/OF...E... 	
		X = internal; Y = internal	Type 4WEH.../...ET... 	Type 4WEH...H.../...ET... 	Type 4WEH...H/O...ET... 	Type 4WEH...H/OF...ET...
			X = external; Y = internal	Type 4WEH.../...T... 	Type 4WEH...H.../...T... 	Type 4WEH...H/O...T...


Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

Type WEH10:

Spool	Neutral position		
	A → T	B → T	P → T
F	3	-	6
G	-	-	7
H	1	3	5
P	-	7	5


Spool	Neutral position		
	A → T	B → T	P → T
T	-	-	7
L	3	-	-
U	-	4	-

Spool	Shifted position			
	P → A	P → B	A → T	B → T
E	1	2	4	5
F	1	4	1	4
G	4	2	2	6
H	4	4	1	4
J	1	2	1	3
L	2	3	1	4
M	4	4	3	4
P	4	1	3	4
Q	2	2	3	5
R	2	3	3	5
U	3	3	3	4
V	2	2	3	5
W	2	2	3	5
T	4	2	2	6

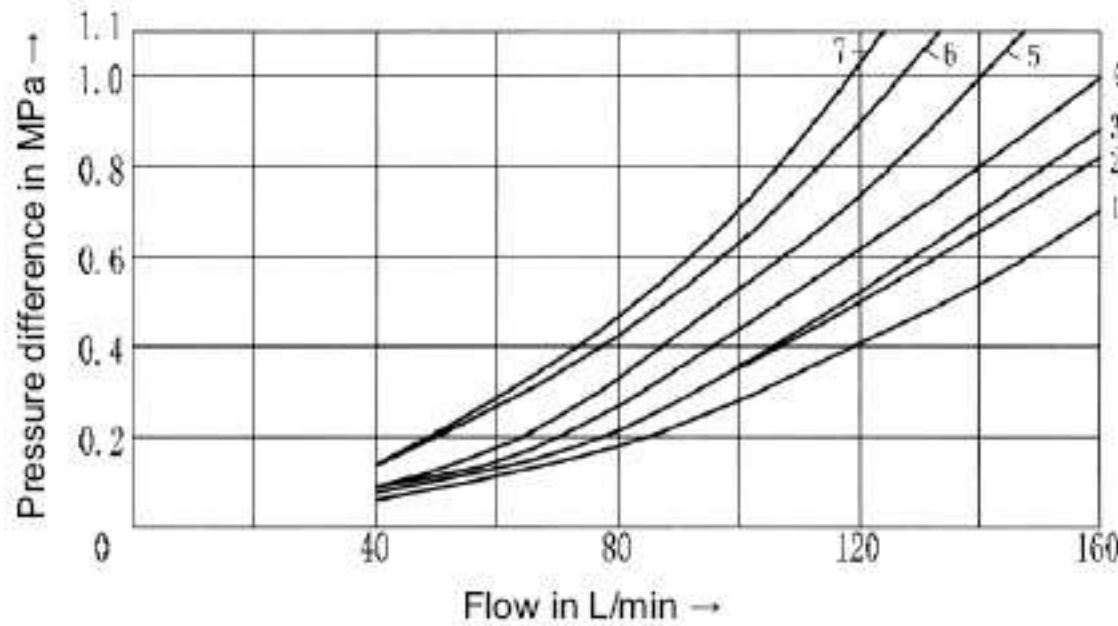


Type WEH16:


Spool E

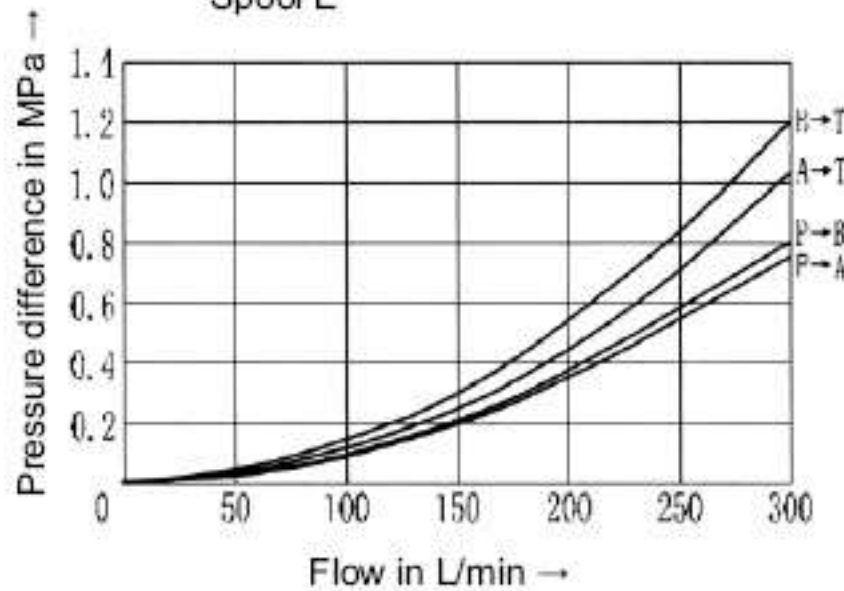


Spool G and T

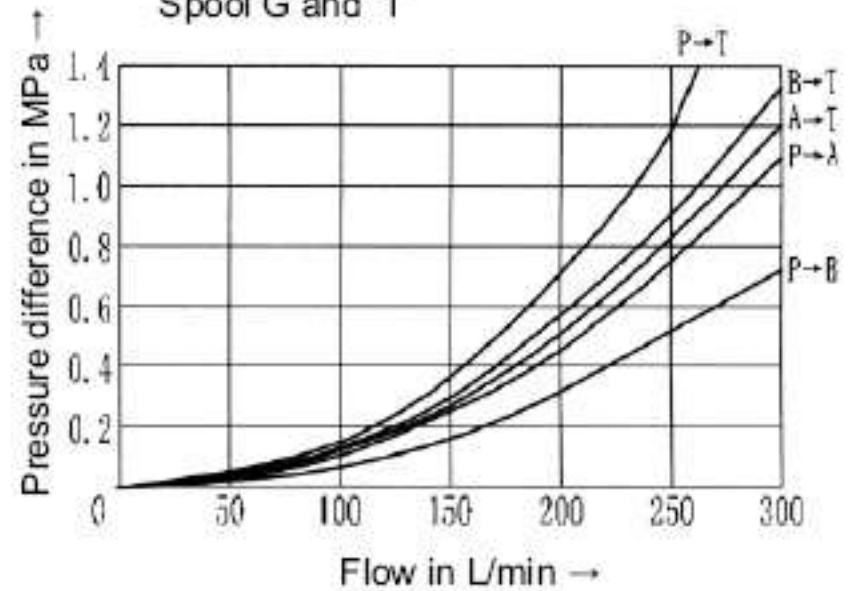

Spool S

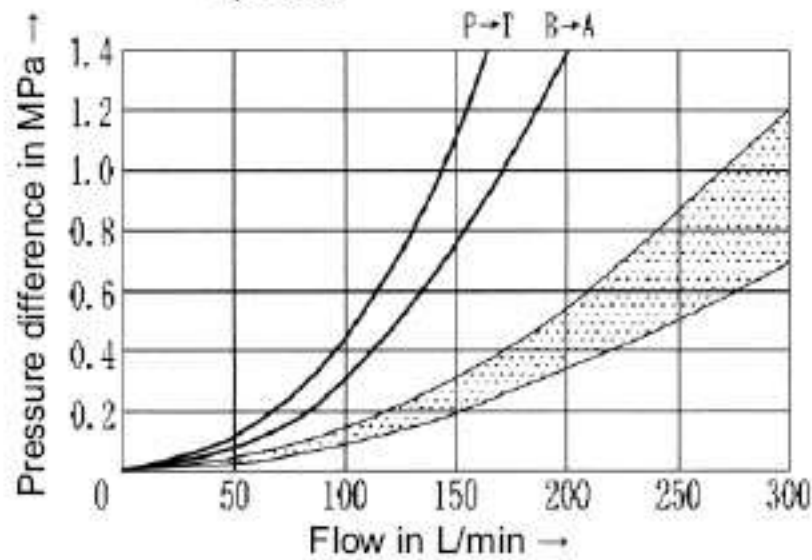

Spool R

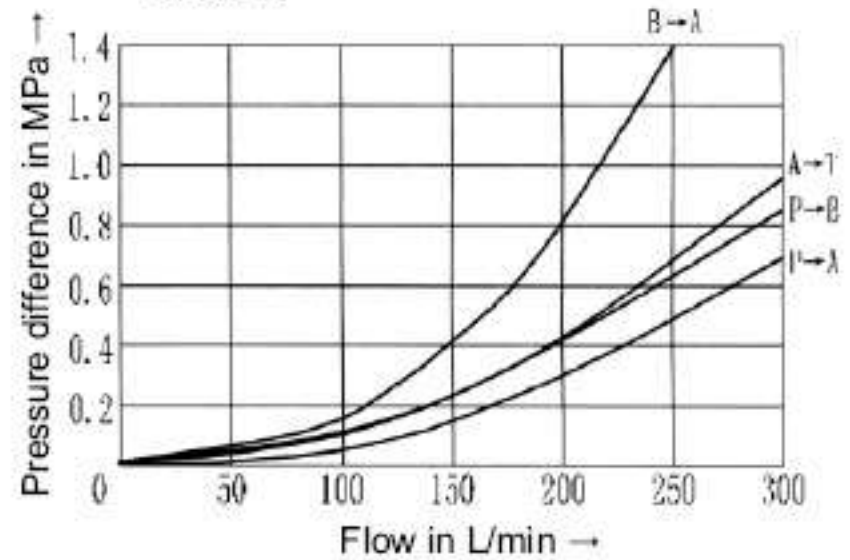


Type WEH25:

7 spool G central position P - T


8 spool T central position P - T

Spool	Shifted position			
	P → A	P → B	A → T	B → T
E	1	1	1	3
F	1	4	3	3
G	3	1	2	4
H	4	4	3	4
J	2	2	3	5
L	2	2	3	3
M	4	4	1	4
P	4	1	1	5
Q	2	2	3	5
R	2	1	1	-
U	2	1	1	6
V	4	4	3	6
W	1	1	1	3
T	3	1	2	4

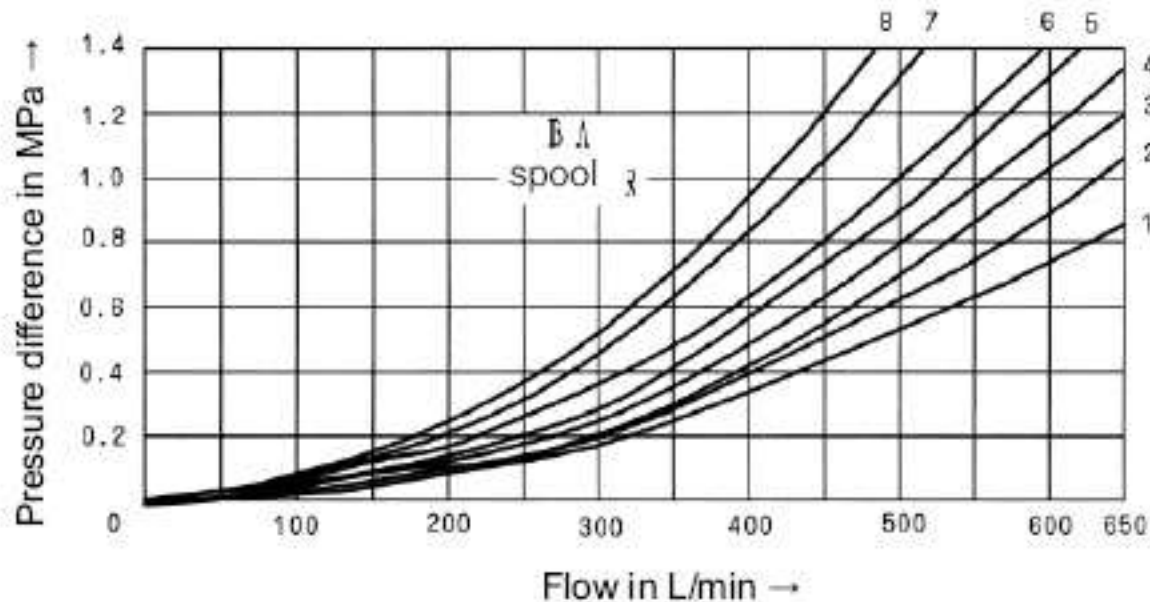


Type WEH32:


Dp/q_v characteristic curves - spool E, R and W

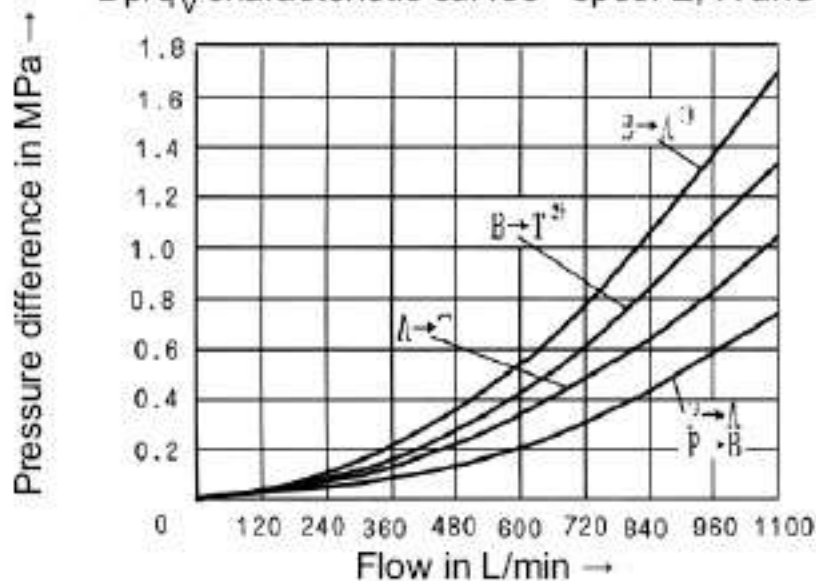

Dp/q_v characteristic curves - spool G and T

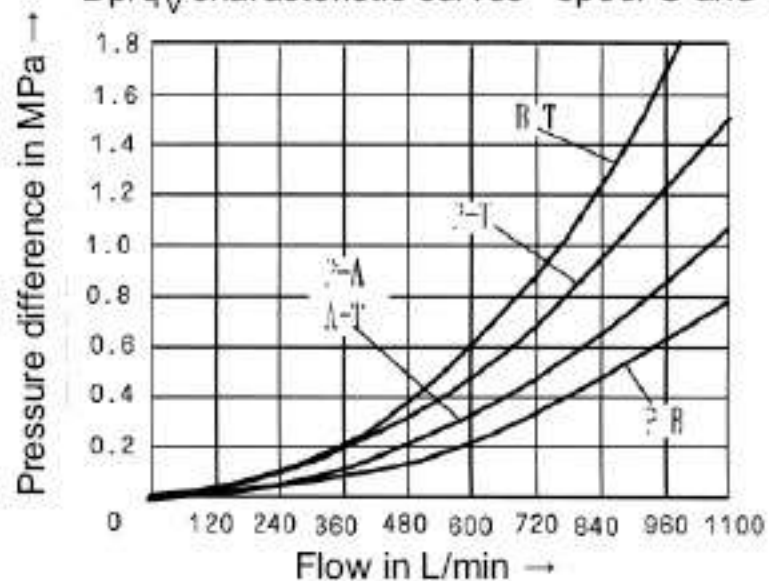

Dp/q_v characteristic curves - all the other spools

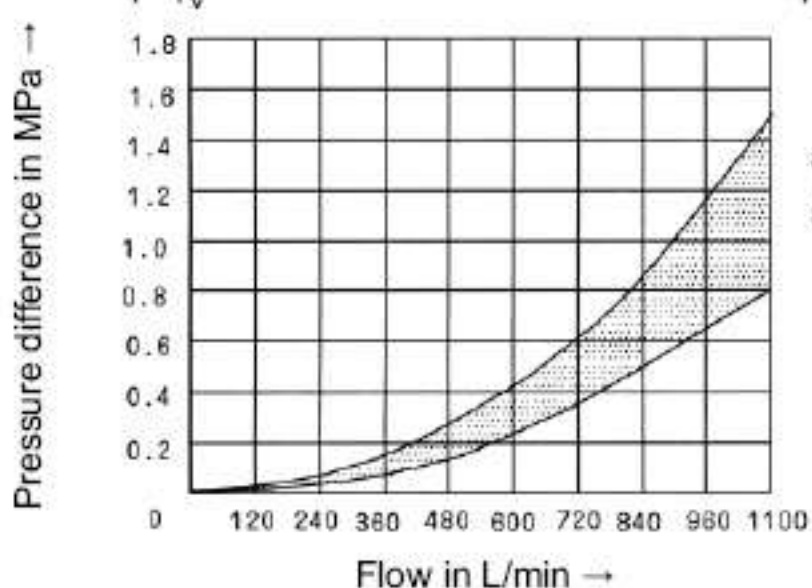

- 1) only with spool R
- 2) not with spool R

Technical data (For applications outside these parameters, please consult us!)										
Hydraulic data 1. Type 4WEH10										
Operating pressure, max.		(MPa)	H- 4WEH10			4WEH10				
- Port P, A, B			to 35			to 28				
- Port T	Pilot oil drain internal	(MPa)	to 16 (DC)			to 10 (AC)				
- Port Y	Pilot oil drain external	(MPa)	to 16 (DC)			to 10 (AC)				
Pilot pressure, min.	Pilot oil drain external	(MPa)	1.0 2-position valve, 3-position valve, with spring offset							
	Pilot oil supply internal	(MPa)	0.7 2-position valve with hydraulic offset (not with spools: C, Z, F, G, H, P, T, V)							
	Pilot oil supply internal (with spools: C, Z, F, G, H, P, T, V)	(MPa)	0.65 (if the flow from P to T in the neutral position (in a 3-position valve) or when the valve is moving through the neutral position (in a 2-position valve) is large enough to ensure a minimum pressure difference of 0.65 MPa from P to T.							
Operating pressure, max.		(MPa)	to 25							
Hydraulic fluid			Mineral oils or phosphate ester							
Viscosity range		(mm ² /s)	2.8 -- 500							
Fluid temperature range		(°C)	-30 -- +80							
Pilot oil volume for shifting operation										
- 3-position valve, spring-centred		(cm ³)	2.04							
- 2-position valve		(cm ³)	4.08							
from "O" position to shifted position (AC and DC solenoid):										
at pilot pressure		(MPa)	~7=		~14=		~21=		~28=	
- 3-position valve, spring-centred		(ms)	30	65	25	60	20	55	15	50
- 2-position valve		(ms)	30	80	30	75	25	70	20	65
from shifted position to "O" position (AC and DC solenoid):										
- 3-position valve, spring-centred			30							
- 2-position valve		(ms)	35	40	30	35	25	30	20	25
Pilot oil flow for shortest shifting time		(L/min)	approx.35							
Installation position			optional; valve with hydraulic spool return "H"(spools C, D, K, Z, Y) horizontal							
Weight (Kg)	Valve with one solenoid		6.4							
	Valve with two solenoids		6.8							
	Shifting time adjustment		0.8							
	Pressure reducing valve		0.5							

2, Type 4WEH16											
Operating pressure, max.		(MPa)	H - 4WEH16			4WEH16					
- Port P, A, B			to 35			to 28					
- Port T	Pilot oil drain external	(MPa)	to 25			to 25					
	Pilot oil drain internal	(MPa)	solenoid (DC) --			solenoid (AC) --					
			to 16			to 10					
			It's impossible for pressure centred 3-position valve to pilot oil drain internal								
- Port Y	Pilot oil drain external	(MPa)	= 16			-- 10					
Pilot pressure, min.	Pilot oil drain external	(MPa)	3-position valve, 1.2								
	Pilot oil supply internal	(MPa)	2-position valve, with spring offset 1.2								
	Pilot oil supply internal	(MPa)	2-position valve with hydraulic offset 1.2								
			For spools C, F, G, H, P, T, V, Z, S (by means of a pre-load valve or a sufficiently large flow) 0.45								
Operating pressure, max.		(MPa)	to 25								
Hydraulic fluid			Mineral oils or phosphate ester								
Fluid temperature range		(°C)	- 30 -- + 80								
Viscosity range		(mm ² /s)	10 ~ 800								
Pilot oil volume for shifting operation											
- 3-position valve, spring-centred		(cm ³)	5.72								
- 2-position valve		(cm ³)	11.45								
- 3-position valve, pressure-centred			WH			WEH					
from "O" position to shifted position "a"		(cm ³)	2.83			2.83					
from shifted position "a" to "O" position		(cm ³)	2.9			5.73					
from "O" position to shifted position "b"		(cm ³)	5.72			5.73					
from shifted position "b" to "O" position		(cm ³)	2.83			8.55					
from "O" position to shifted position (AC and DC solenoid):											
at pilot pressure		(MPa)	-- 5 =		-- 15 =		-- 25 =				
- 3-position valve, spring-centred		(ms)	35	65	30	60	30	58			
- 2-position valve		(ms)	45	65	35	55	30	50			
- 3-position valve, pressure-centred		(ms)	a	b	a	b	a	b	a	b	
			30	65	25	55	63	20	25	55	60
from shifted position to "O" position:											
- 3-position valve, spring-centred			30...45 for --, 30 for =								
- 2-position valve		(ms)	45...60	45	35...50	35	30...45	30			
- 3-position valve, pressure-centred		(ms)	a	b	a	b	a	b	a	b	
			20...30	20	20...35	20	20...35	20			
Installation position			optional; valve with hydraulic spool return (spools C, D, K, Z, Y) horizontal								
Pilot oil flow for shortest shifting time		(L/min)	approx.35								
Weight			approx.8.6 WH approx.7.3								
*Shifting time = Contacting at the pilot valve up to start of opening of the control land in the main valve											

3, Type 4WEH 25 :									
Operating pressure, max.- Port P, A, B (MPa)		to 35 (H-4WHE25), to 28 (4WEH25)							
- Port T	Pilot oil drain external (MPa)	to 25							
	Pilot oil drain internal (MPa)	solenoid (DC) --				solenoid (AC) --			
		to 16				to 10			
It's impossible for pressure centred 3-position valve to pilot oil drain internal									
- Port Y	Pilot oil drain external solenoid (DC) -- (MPa)	16							
	solenoid (AC) -- (MPa)	10							
	for Type 4WH (MPa)	25							
Pilot pressure, min.	Pilot oil supply external (MPa)	3-position valve, spring-centred 1.3							
	Pilot oil supply internal (MPa)	3-position valve, pressure-centred 1.8							
	Pilot oil supply internal (MPa)	2-position valve, with spring offset 1.3							
		2-position valve, with hydraulic offset 0.8							
For spools F, G, H, P, T, V, C and Z (by means of a pre-load valve or a sufficiently large flow) 0.45									
Operating pressure, max. (MPa)		to 25							
Hydraulic fluid		Mineral oils or phosphate ester							
Viscosity range (°C)		- 30 -- + 80							
Fluid temperature range (mm ² /s)		10 ~ 800							
Pilot oil volume for shifting operation									
- 3-position valve, spring-centred (cm ³)		14.2							
- 2-position valve, with spring offset (cm ³)		28.4							
- 3-position valve, pressure-centred		WH				WEH			
from "O" position to shifted position "a" (cm ³)		7.15				7.15			
from shifted position "a" to "O" position (cm ³)		14.18				7.0			
from "O" position to shifted position "b" (cm ³)		14.18				14.15			
from shifted position "b" to "O" position (cm ³)		19.88				5.73			
from "O" position to shifted position (AC and DC solenoid):									
at pilot pressure (MPa)		-- 7 =		-- 14 =		-- 21 =		-- 25 =	
- 3-position valve, spring-centred (ms)		50	85	40	75	35	70	30	65
- 2-position valve, with spring offset (ms)		120	160	100	130	85	120	70	105
- 3-position valve, pressure-centred (ms)		a	b	a	b	a	b	a	b
		30	35	55	65	30	35	55	65
		25	30	50	60	25	30	50	60
from shifted position to "O" position:									
- 3-position valve, spring-centred		40...55 for --, 40 for =							
- 2-position valve, with spring offset (ms)		120	125	95	100	85	90	75	80
- 3-position valve, pressure-centred (ms)		a	b	a	b	a	b	a	b
		30...35	30	35	30...35	30	35	30...35	30
		30	35	30...35	30	35	30...35	30	35
Installation position		optional; valve with hydraulic spool return (spools C, D, K, Z, Y) horizontal							
Pilot oil flow for shortest shifting time (L/min)		approx. 35							
Weight (Kg)		the whole valve approx. 18 WH approx. 17.6							
* Shifting time = Contacting at the pilot valve up to start of opening of the control land in the main valve									

4. Type 4WEH32:														
Operating pressure, max.		(MPa)	H-4WHE25				4WEH25							
- Port P, A, B			to 35				to 28							
- Port T	Pilot oil drain external	(MPa)	to 25											
	Pilot oil drain internal	(MPa)	solenoid (DC) –				solenoid (AC) –							
			to 16				to 10							
- Port Y		Pilot oil drain external (MPa)	It's impossible for pressure centred 3-position valve to pilot oil drain internal											
- Port Y		Pilot oil drain external (MPa)	solenoid (DC) – : 16; solenoid (AC) = : 10											
Pilot pressure, min.	Pilot oil supply external (MPa)		3-position valve, 0.8											
	Pilot oil supply internal (MPa)		2-position valve, with spring offset 1											
	pilot oil supply internal (MPa)		2-position valve with hydraulic offset 0.5											
Operating pressure, max.		(MPa)	For spools F, G, H, P, T, V, C and Z (by means of a pre-load valve or a sufficiently large flow) 0.45											
Operating pressure, max.		(MPa)	to 25											
Hydraulic fluid			mineral oils or phosphate ester											
Fluid temperature range		(°C)	- 30 ~ + 80											
Viscosity range		(mm ² /s)	2.8 ~ 500											
Pilot oil volume for shifting operation														
- 3-position valve, spring-centred		(cm ³)	29.4											
- 2-position valve, spring-centred		(cm ³)	58.8											
- 3-position valve, pressure-centred														
from "O" position to shifted position "a"		(cm ³)	14.4											
from shifted position "a" to "O" position		(cm ³)	15.1											
from "O" position to shifted position "b"		(cm ³)	29.4											
from shifted position "b" to "O" position		(cm ³)	14.4											
from "O" position to shifted position (AC and DC solenoid):														
at pilot pressure		(MPa)	~ 5 =				~ 15 =				~ 25 =			
- 3-position valve, spring-centred		(ms)	75	105	55	90	45	80						
- 2-position valve, spring-centred		(ms)	120	155	100	135	90	125						
- 3-position valve, pressure-centred		(ms)	a	b	a	b	a	b	a	b	a	b	a	b
			50	60	100	105	40	45	85	95	35	40	85	95
*from shifted position to "O" position:														
- 3-position valve, spring-centred			60...75 for ~, 50 for =											
- 2-position valve, spring-centred		(ms)	115...130	90	85...100	70	65...80	65						
- 3-position valve, pressure-centred		(ms)	a	b	a	b	a	b	a	b	a	b	a	b
			35...65	30	40	60...90	30	105...185	50					
Installation position			optional; valve with hydraulic spool return (spools C, D, K, Z, Y) horizontal											
Pilot oil flow for shortest shifting time		(L/min)	approx. 50											
Weight (kg)	Valve with one solenoid		approx. 40.5											
	Valve with two solenoids		approx. 41 WH approx. 39.5											
* Shifting time = Contacting at the pilot valve up to start of opening of the control land in the main valve														

Electrical data

kinds of volt		DC	AC
Volt	(V)	12, 24, 42, 60, 96, 110, 180, 195, 220	42, 110, 127, 220/50Hz 110, 120, 220/60Hz
Consume power	(W)	26	-
Absorb power	(VA)	-	46
Starup power	(VA)	-	130
Duty		Continuous	
Circumstance temperature	(°C)	+50	
Coil temperature	(°C)	+50	
Protective setting		IP65	

Performance limits: (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

The shifting performance limits down are valid for applications with two directions of flow (e.g. from P to A and simultaneous return flow from B to T). As a result of the flow forces occurring within the valve with only one direction of flow (e.g. from P to A with port B blocked) the permissible performance limits may be considerably lower! (In the case of applications of this kind, please consult us.)

The performance limits were determined with the solenoid at operating temperature, 10% undervoltage and with no tank pre-loading.

Type WEH 10

Way	Kinds of spring keeping	spool	Operating pressure in MPa		
			20	25	32
4/2-way	main valve	HC-HD-HK-HZ-HY	160		
		HC../O-HD../O HK../O../HZ.O	160		
	without spring	HC../OF-HD../OF.. HK../OF../HZ.O.F	160		
		spring offset	C.D.K.Z.Y	160	
4/3-way	spring-centred	E.J.L.M.Q.U.W.R.V	160		
		H	160	150	120
		G.T	160		140
		F.P	160	160	160

Type WEH 16


Way	Kinds of spring keeping	spool	Operating pressure in Mpa					description
			7	14	21	28	35	
4/2-way	spring offset	C	300	300	300	300	300	Spool H .F .P .G .S, Pre-load valve, required for X = internal at pilot pressure of 1.2 MPa
		D.Y	300	270	260	250	230	
		K	300	250	240	230	210	
		Z	300	260	190	180	160	
	spring offset	for all spools	300	300	300	300	300	
	hydraulic offset	C.D.K.Z.Y	300	300	300	300	300	
4/3-way	spring-centred	D.H.J.L.M. Q.U.W.R	300	300	300	300	300	
		F.P	300	250	180	170	150	
		G.T	300	300	240	210	190	
		S	300	300	300	250	220	
		V	300	250	210	200	180	
	pressure-centred	for all spools	300	300	300	300	300	at pilot pressure of 1.6 MPa

Type WEH 25

Way	Kinds of spring keeping	spool	Operating pressure in Mpa					description
			7	14	21	28	35	
4/2-way	spring offset	C	650	650	650	650	650	Spools C, Z in general, Pre-load valve, required for X=inter, flow up to approx. 180 L/min
		D.Y	650	650	400	350	300	
		K	650	650	420	370	320	
		Z	650	650	650	480	400	
	spring offset	for all spools	650	650	650	650	650	min. at pilot pressure of 1.3 MPa
	without spring	C.D.K.Y	650	650	650	650	650	Spools C, Z in general, Pre-load valve, required for X=inter, flow up to approx. 180 L/min
detent	C.D.K.Y	650	650	650	650	650		
4/3-way	spring-centred	E.L.M.Q.U.W	650	650	650	650	650	Spools C, T, F, P, H in general, Pre-load valve, required for X=inter flow up to approx. 180 L/min
		H.	650	650	550	400	360	
		F.	650	550	430	330	300	
		G.T	400	400	400	400	400	
		P	650	550	430	330	300	
		J	650	650	650	600	520	
		R	650	650	650	650	580	
		V	650	500	400	350	310	
	pressure-centred	E.F.H.J.L.M P.Q.R.U.V.W	650	650	650	650	650	at pilot pressure of 1.8 MPa
		G.T	400	400	400	400	400	
G.T		650	650	650	650	650	at pilot pressure of 3 MPa	


Type WEH 32

Way	Kinds of spring keeping	spool	Operating pressure in MPa					description
			7	14	21	28	35	
4/2-way	spring offset	D.Y	1100	1040	540	480	420	
		C	1100	1040	860	800	700	
		Z	1100	1040	860	700	650	
		K	1100	1040	860	500	450	
	hydraulic offset	for all spools	1100	1040	860	750	680	at pilot pressure of 1 MPa
4/3-way	spring-centred	E.J.L.M.Q.R.U.W	1100	1040	860	750	680	Spools C, T, F, P, H in general, Pre-load valve, required for X=inter flow up to approx. 180 L/min
		H.G.F.T.P.	900	900	800	650	450	
		V	1000	1000	680	500	450	
	pressure-centred	for all spools (at pilot pressure of 0.85 MPa)	1100	1040	860	750	680	

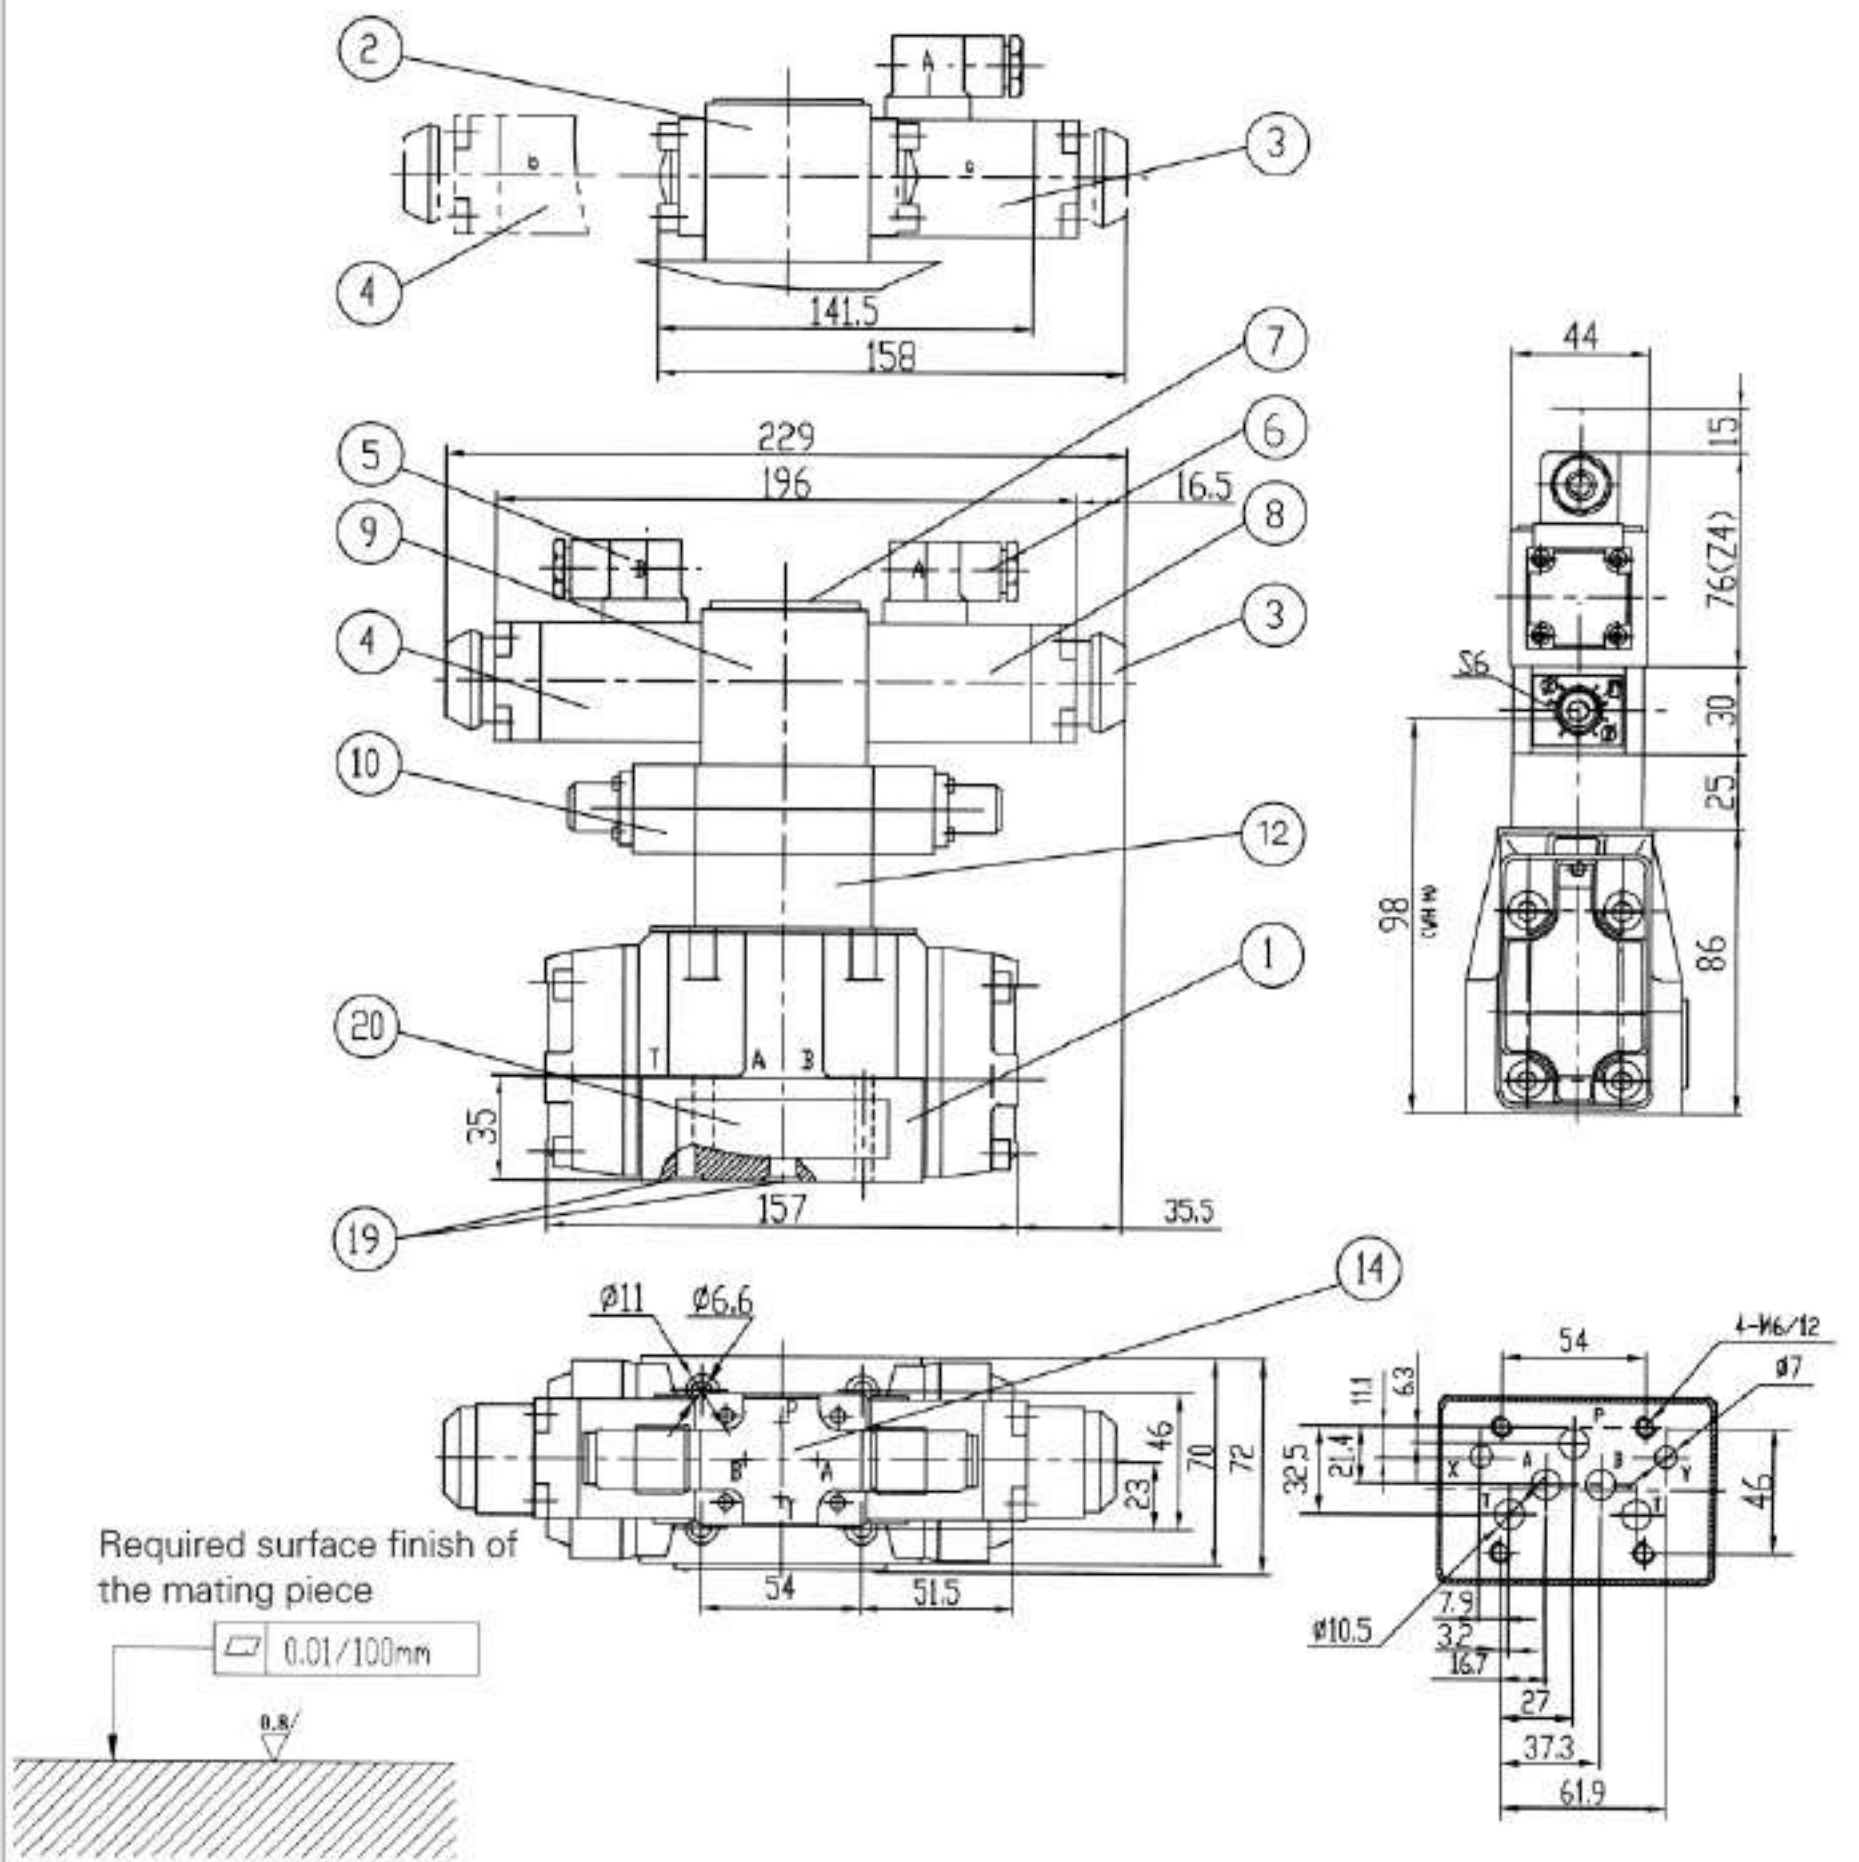


Subplates G535/01 (G3/4") ; G536/01 (G1") ; G534/01 (G3/4") ;
 G535/02 (M27x2) ; G536/02 (M33x2) ; G534/02 (M27x2) see Page 206, 207

- | | |
|---|--|
| 1 Main valve | 10 Double throttle/check valve |
| 2 2-position valve with one solenoid and plug-in Z4 | 11 Reducing valve |
| 3 Solenoid "a" | 14 The position for port A, B, P and T of pilot valve |
| 4 Solenoid "b" | 19 O-Ring 12 x 2 for port A, B, P and T ; O-Ring 10.82 x 1.78 for port X and Y |
| 5 Plug-in connector colour grey | 20 Nameplate |
| 6 Plug-in connector colour black | valves fixing screws |
| 7 Nameplate | 4 - M6 x 45 - 10.9 |
| 8 Manual override "N", optional | (GB/T70.1-2000) |
| 9 2 positions (2 solenoids) and plug-in Z4 | |
| 3 positions (2 solenoids) and plug-in Z4 | |

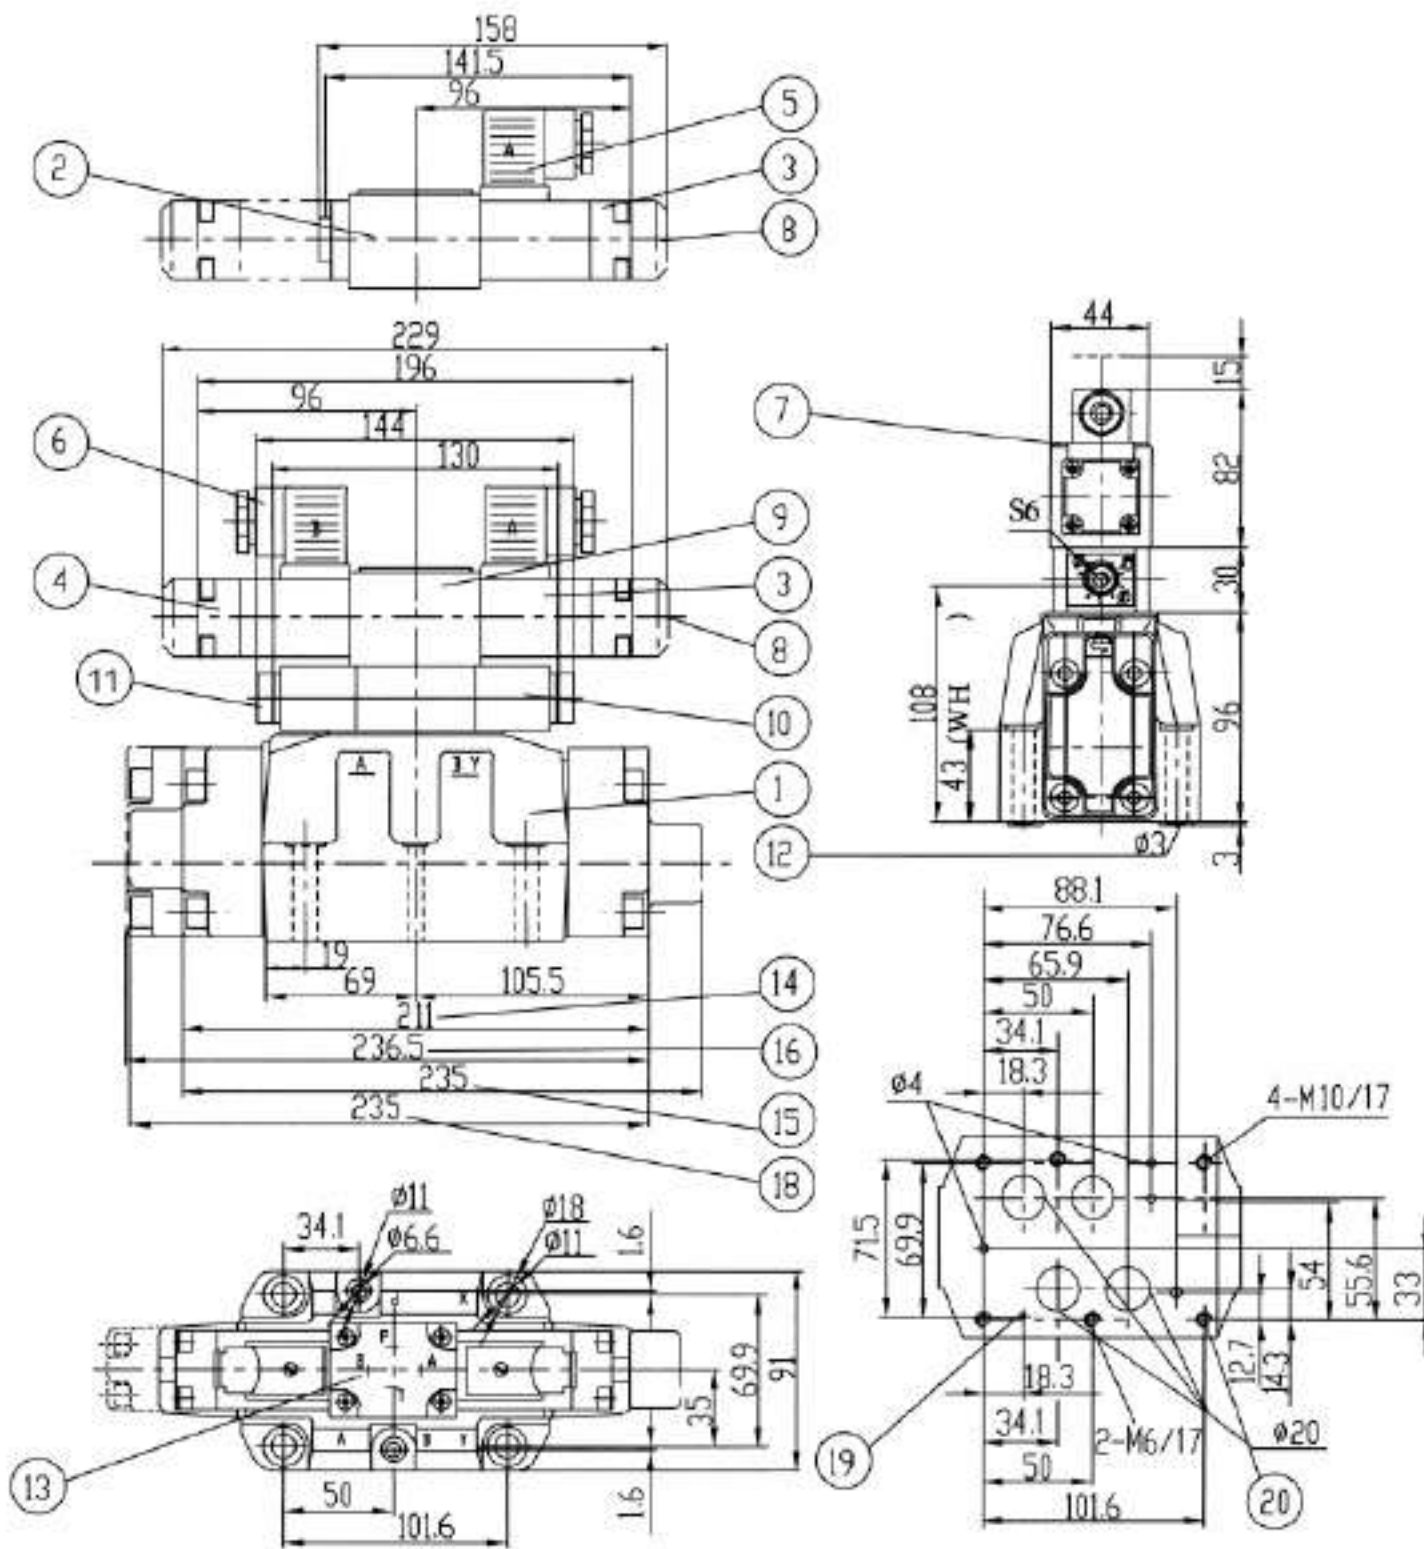


Required surface finish of the mating piece

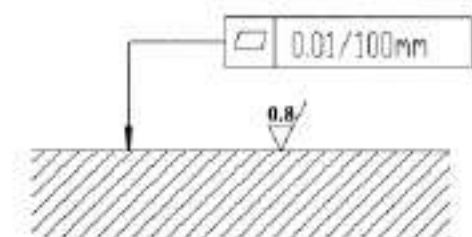


Subplates G172 / 01 (G3/4"); G172 / 02 (M27x2); G174 / 01 (G1");
G174 / 02 (M33x2); G174 / 08 see Page 206, 207

- | | |
|--|---|
| 1 Main valve | 12 Two fixing pins |
| 2 2-position valve with one solenoid | 13 The position for port A, B, P and T of pilot valve |
| 3 Solenoid "a" | 14 3-position valve, spring-centred
2-position valve, pressure-centred |
| 4 Solenoid "b" | 15 2-position valve, with spring offset (C .D .K .Z) |
| 5 Plug-in connector colour grey | 16 3-position valve, pressure-centred |
| 6 Plug-in connector colour black | 18 2-position valve, with spring offset(Y) |
| 7 Nameplate for the pilot valve | 19 Fixing pin hole (Φ 4H12 depth 8) |
| 8 Manual override "N", optional | 20 Tightening screws for valves
4 - M10 x 60 -10.9 (GB/T70.1-2000)
2 - M 6 x 60 -10.9 (GB/T70.1-2000) |
| 9 2-position valve with two solenoids and plug Z4
3-position valve with two solenoids and plug Z4 | |
| 10 Double throttle/check valve | |

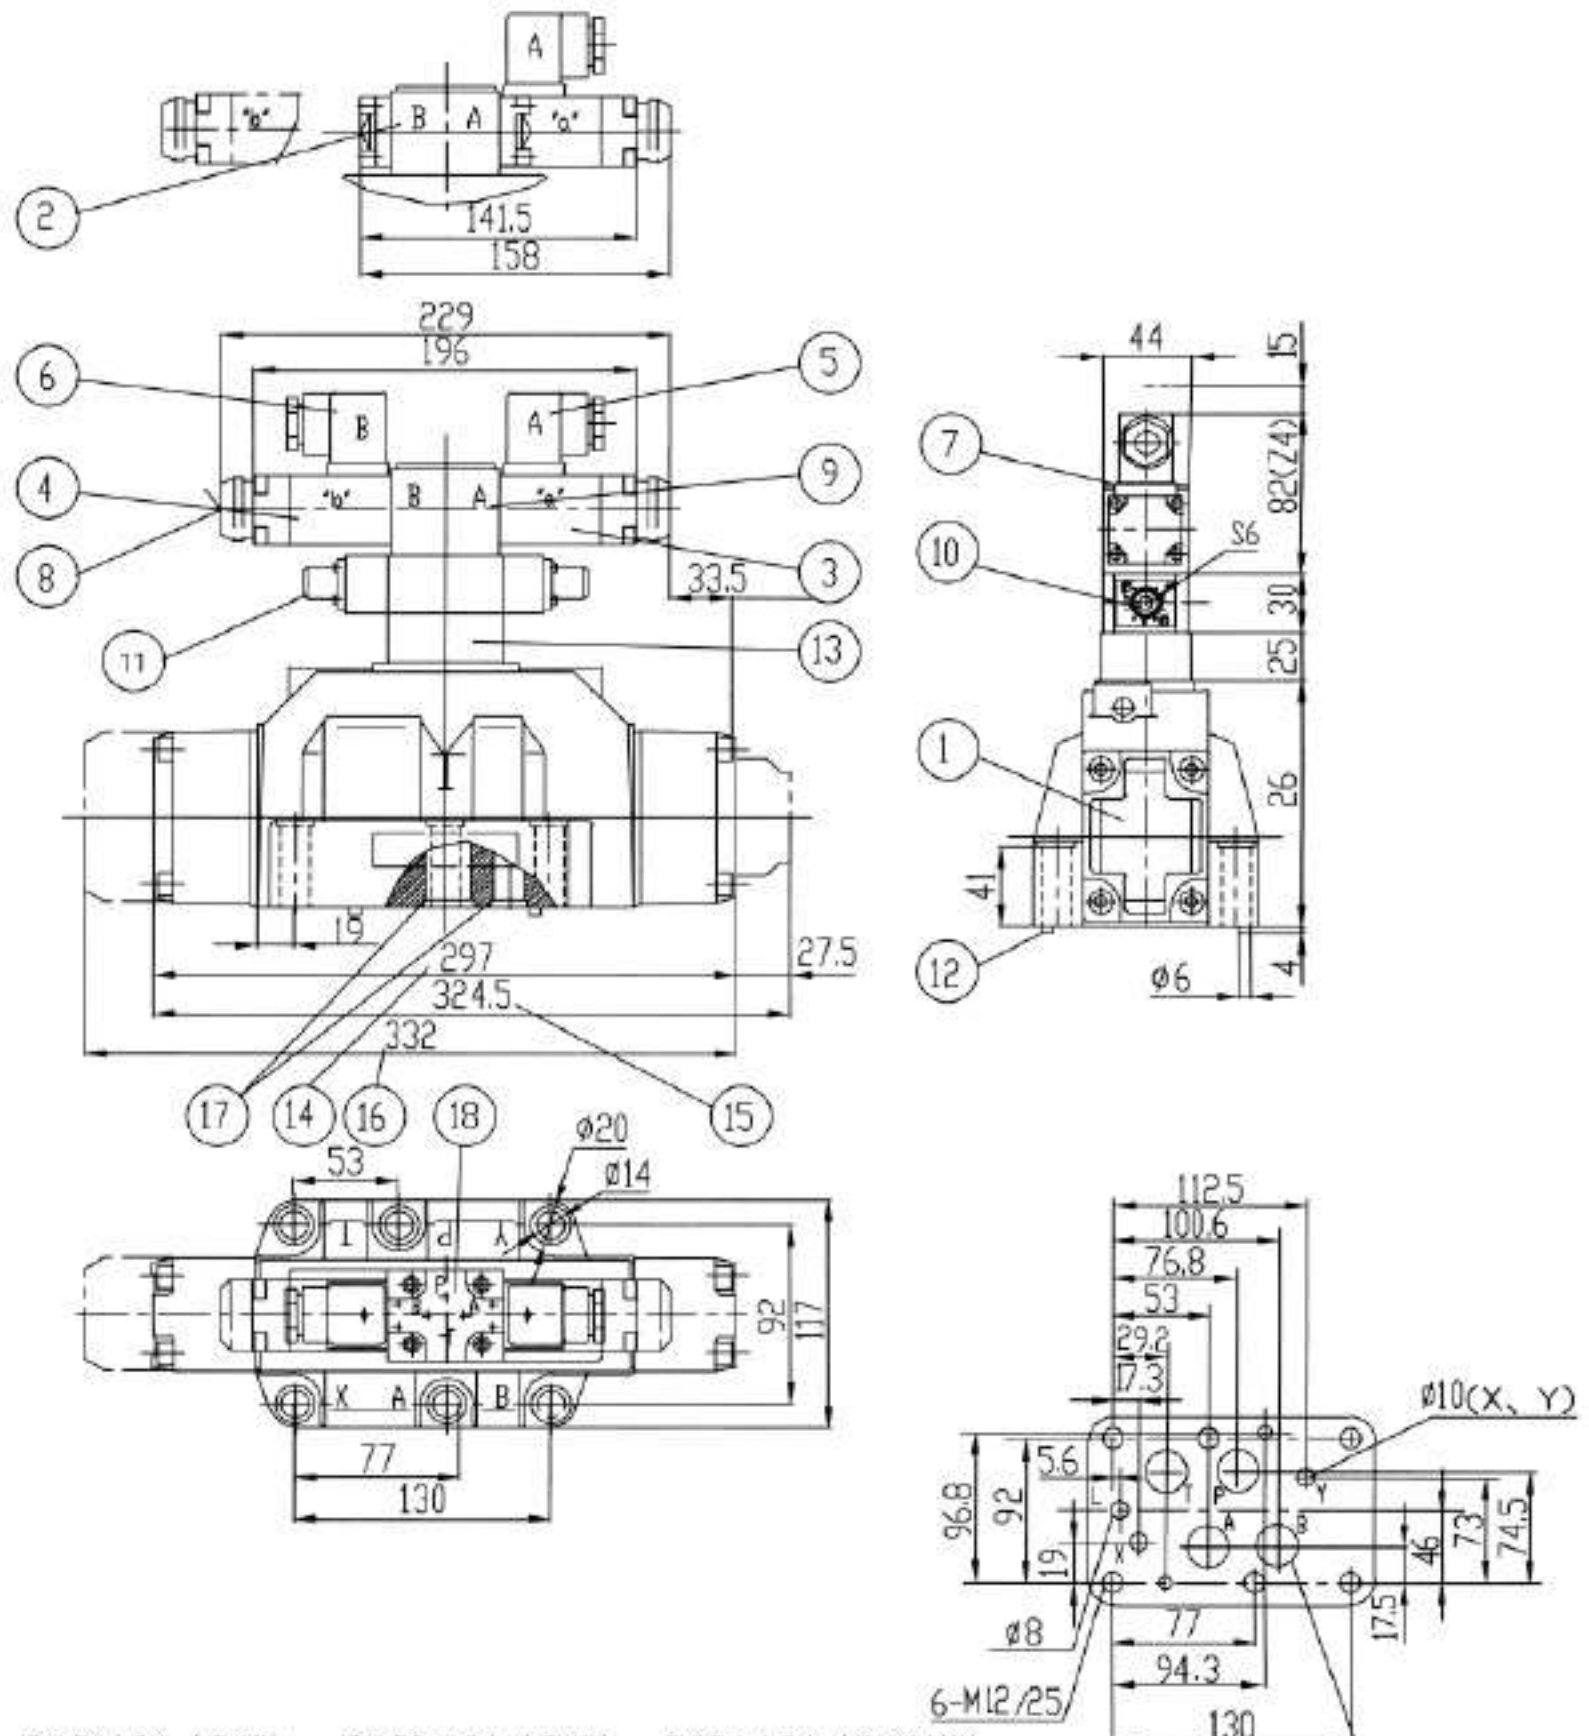

Subplates G151/01 (G1") ; G153/01 (G1"); G154/01 (G1 1/4");
 G151/02 (M33x2); G153/02 (M33x2); G154/02 (M42x2); $\phi 24.5(A, B, T)$
 G156/01 (G1 1/2"); G156/02 (M48x2); see Page 209

- | | |
|--|---|
| 1 Main valve | 13 Reducing valve |
| 2 2-position valve with one solenoid and plug Z4 | 14 3-position valve, spring-centred
2-position valve, hydraulic offset |
| 3 Solenoid "a" | 15 2-position valve, spring-centred
spring offset (C, D, K, Z) |
| 4 Solenoid "b" | 16 3-position valve, pressure-centred |
| 5 Plug-in connector colour grey | 17 O-Ring 27 x 3 for port A, B, P and T; O-Ring
19 x 3 for port X and Y |
| 6 Plug-in connector colour black | 18 The position for port A, B, P of pilot valve
fixing screws
6 - M 12 x 60 -10.9 (GB/T70.1-2000) |
| 7 Nameplate for the pilot valve | |
| 8 Manual override "N", optional | |
| 9 2 positions (2 solenoids)
3 positions (2 solenoids) | |
| 10 Double throttle/check valve | |
| 12 Two fixing pins | |

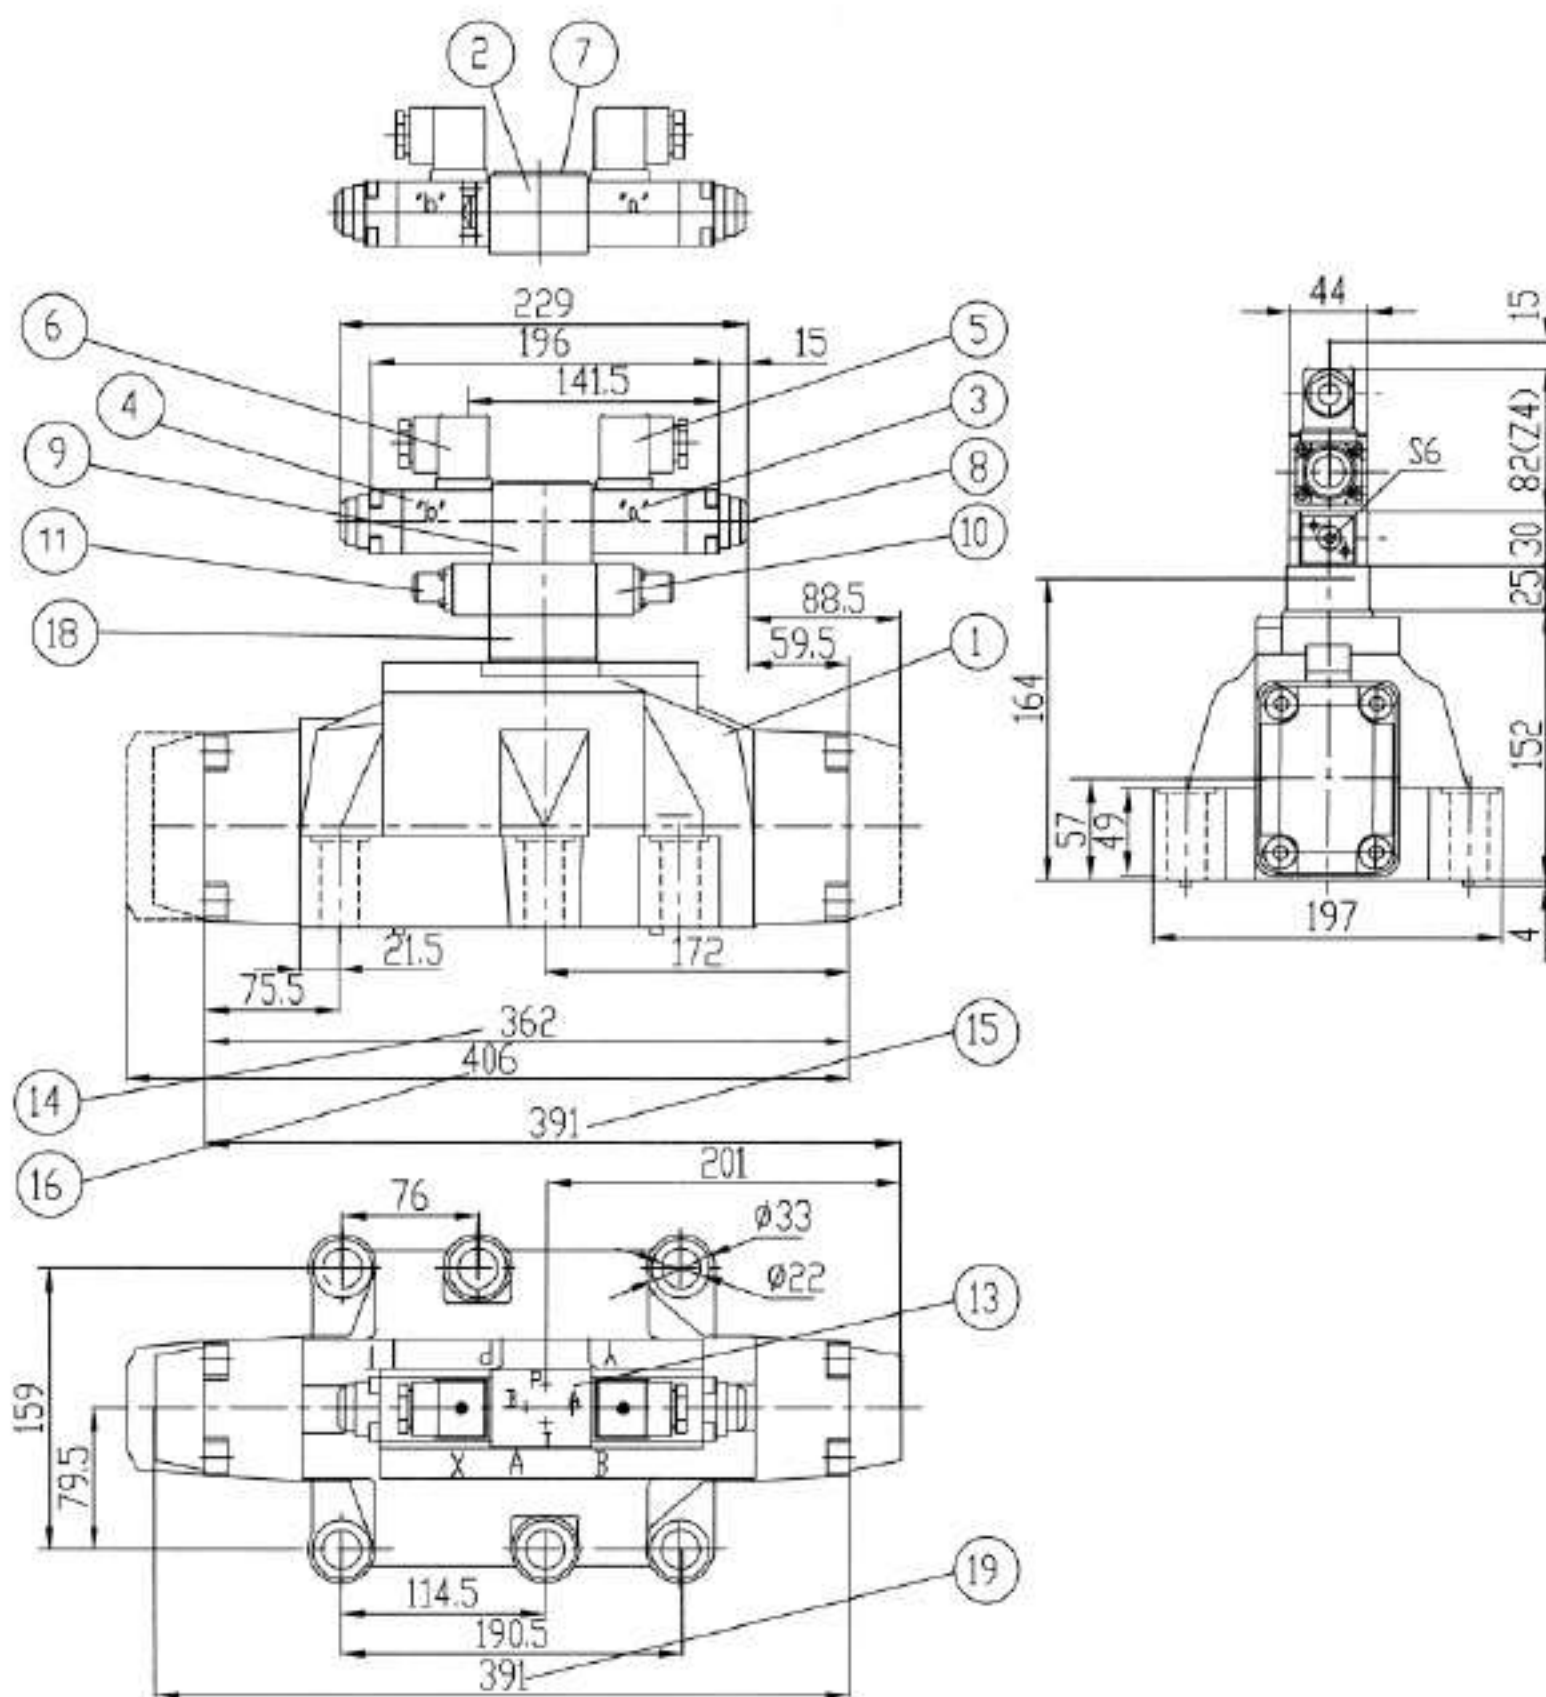

Subplates G157/01 (G1/2") ; G157/02 (M48x2); G158/10); see Page 210, 211

- | | |
|--|---|
| 1 Main valve | 13 The position for port A, B, P and T of pilot valve |
| 2 2-position valve with one solenoid and plug Z4 | 14 3-position valve, spring-centred
2-position valve, hydraulic offset |
| 3 Solenoid "a" | 15 2-position valve, spring offset (C, D, K, Z) |
| 4 Solenoid "b" | 16 3-position valve, pressure-centred |
| 5 Plug-in connector colour grey | 18 Reducing valve |
| 6 Plug-in connector colour black | 19 2-position valve, with spring offset |
| 7 Nameplate for the pilot valve | O-Ring 42 x 3 for port A, B, P and T; O-Ring
19 x 3 for port X and Y |
| 8 Manual override "N", optional | fixing screws |
| 9 2 positions (2 solenoids)
3 positions (2 solenoids) | 6 - M 20 x 80 -10.9 (GB/T70.1-2000) |
| 10 Double throttle/check valve | |
| 12 Two fixing pins | |

Pilot valve:

WEH used 4WE6 as pilot valve, the control spool is held in the neutral or initial position by means of return spring, is held in the working position by solenoids or detent.


All spool of pilot valve see below table.

Main valve	Pilot valve	
3-position valve, spring-centred	spool J ,3-position valve	
3-position valve, pressure-centred	spool M ,3-position valve	
2-position valve Y . . . / . . . and HY . . . / . . .	spool Y ,2-position valve (with spring offset)	
2-position valve	spool D ,2-position valve	
C, D, K, Z and HC, HD, HK, HZ	Type of pilot valve:	with spring offset without spring offset without spring offset, but with detent


Dimensions of electrical connection

(Dimensions in mm)


Z5
large plug-in
connector

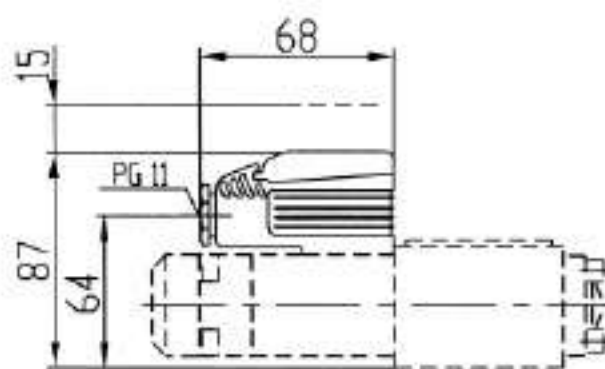

Z4
plug-in
connector

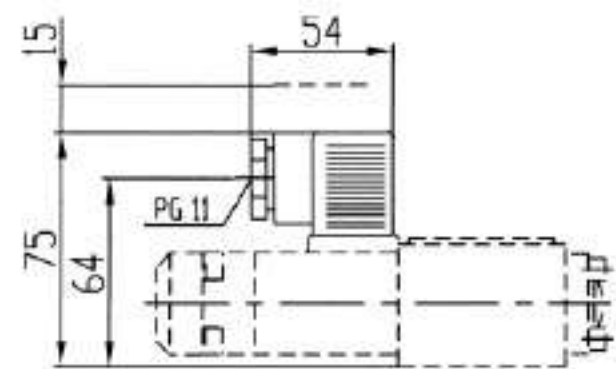


Z5 L
plug-in connector
with indicator
lamp

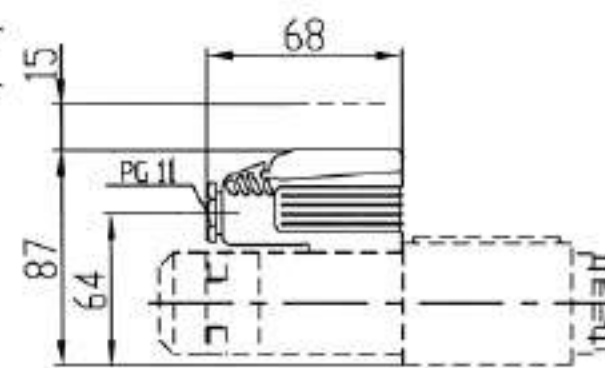

Additional equipment : The stroke limiter


The stroke limiter limits the stroke of the control spool installed in the cover of main valve, change the moment time of form or spool by adjusting yard of valve orifice, must be without pressure.

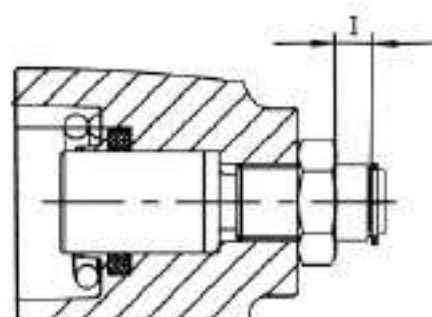


Adjustment range

(Dimensions in mm)


Size	Adjustment range	
WEH16	10	1 turn = 1.5 mm adjustment travel
WEH25	12	
WEH32	13	

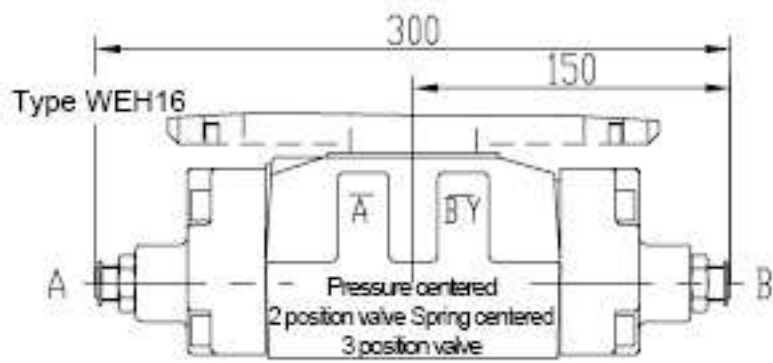


Stroke limiter on sides A and B end of main valve Stroke limiter on valve side A and B

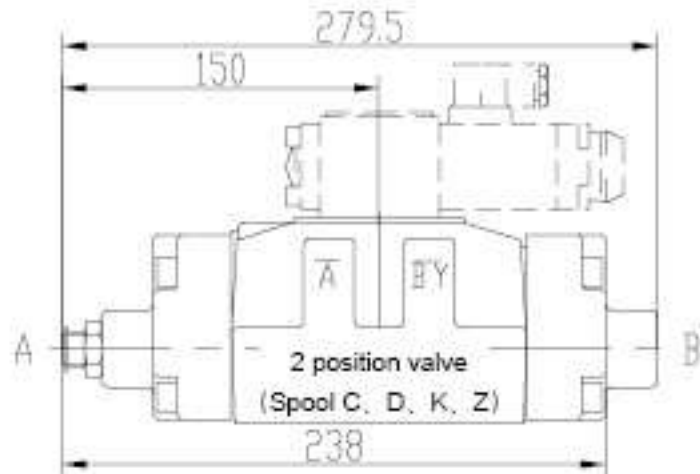


Stroke limiter on side A of valve

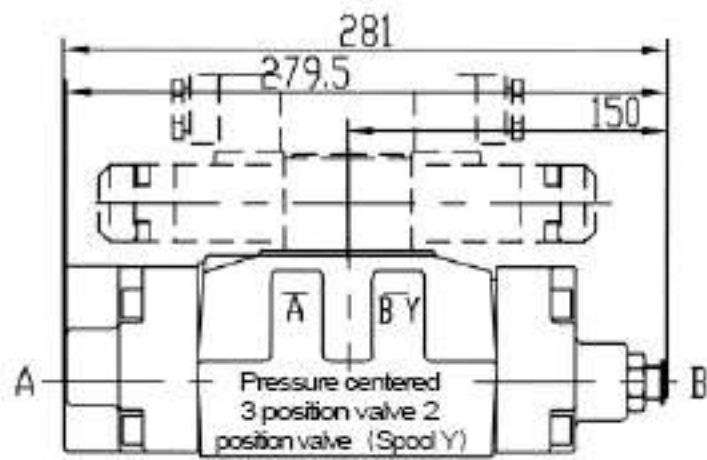


Stroke limiter on side B of valve

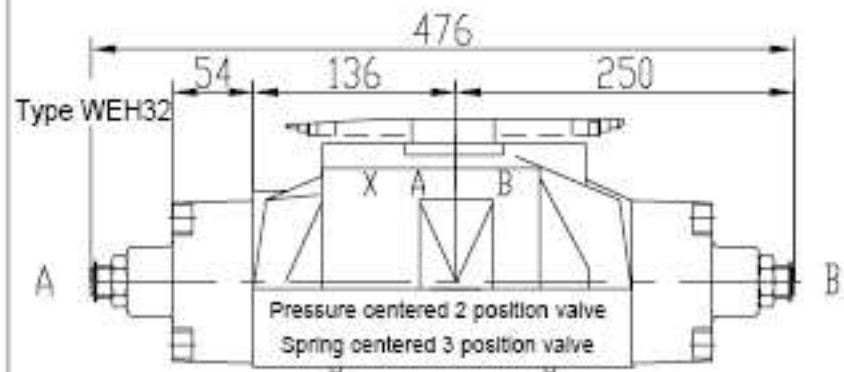


Stroke limiter on sides A and B end of main valve Stroke limiter on valve side A and B

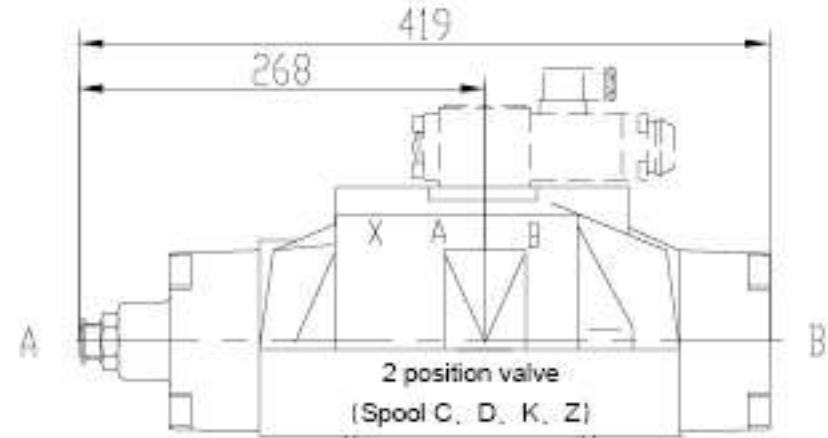


Stroke limiter on side A of valve

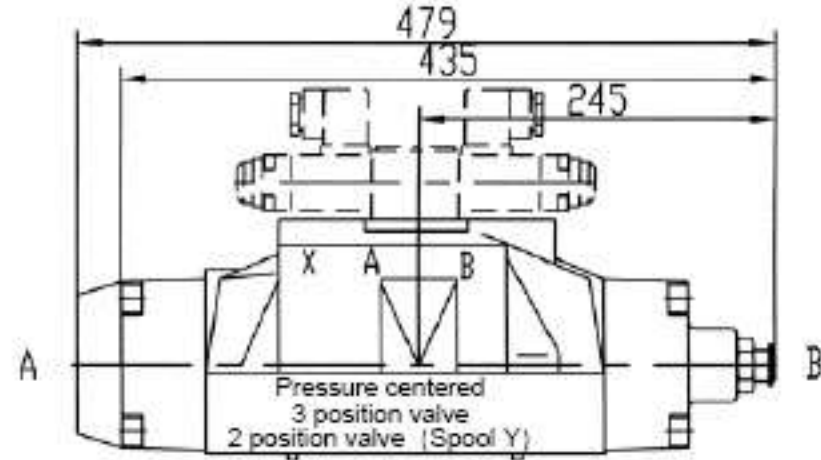


Stroke limiter on side B of valve

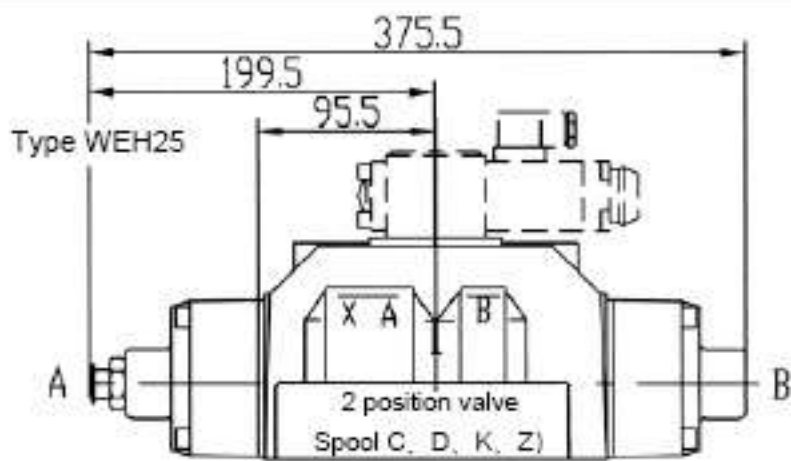

Stroke limiter on valve side A

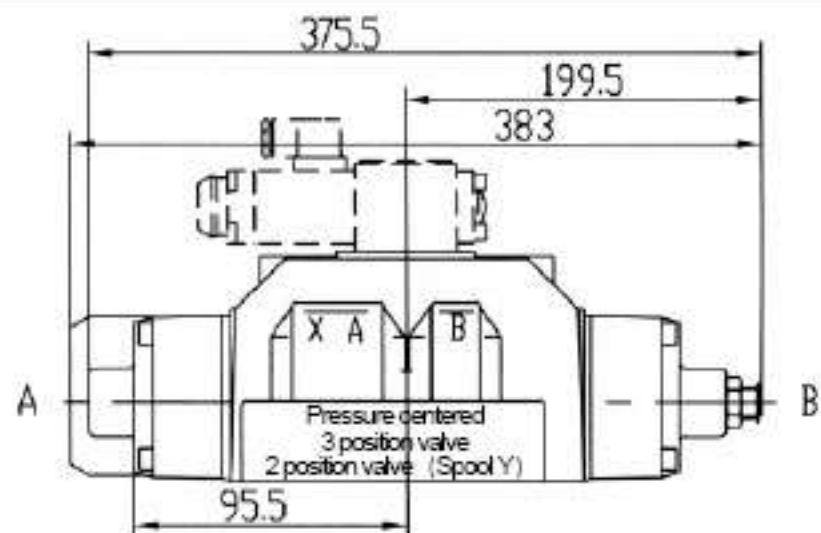

Stroke limiter on valve side B

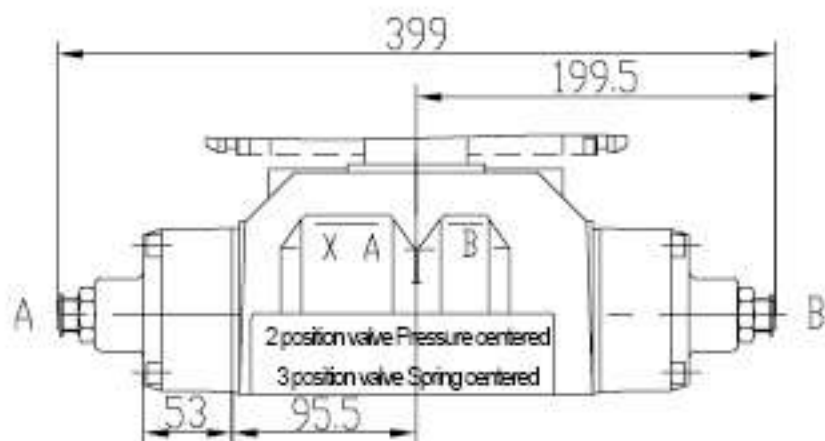

Stroke limiter on sides A and B end of main valve Stroke limiter on valve side A and B

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	Directional valves electro-hydraulically operated (new series)			RE 24751/12.2004
	Size 10 to 32	up to 35 MPa	up to 1100 L/min	

Features:

- Valves used to control the start, stop and direction of a fluid flow
- Electro-hydraulic operation (WEH), hydraulic operation (WH)
- For subplate mounting
- Spring or pressure-centred, spring or hydraulic offset
- Wet-pin DC or AC solenoids, optional
- Manual override, optional
- Electrical connection as individual or central connection
- Shifting time adjustment, optional
- Pre-load valve in the P-channel of the main valve, optional
- Auxiliary equipment:
 - Stroke adjustment at main spool, optional
 - Stroke adjustment and/or end position indicator, optional
 - Mechanical or inductive limit switch (proximity type) at the main spool, optional
- Porting pattern to Din 24 340 form A, ISO 4401 and CETOP-RP 121H



Pilot oil supply

4WEH . . . and 4WH . . .

The pilot oil supply is sourced externally via channel X from a separate circuit.

The pilot oil drain is led externally via channel Y to tank.

4WEH . . . E . . .

The pilot oil supply is sourced internally from channel P of the main valve.

The pilot oil drain is led externally via channel Y to tank. Port X in the subplate is plugged.

Change over from external to internal or from internal to external pilot oil supply (size 16): Remove the cover on the solenoid side "a", remove the plugs and turn end-for-end, insert plugs and re-place the cover.

4WEH . . . ET . . .

The pilot oil supply is sourced internally from channel P of the main valve.

The pilot oil drain is led internally via channel T to tank. Ports X and Y in the subplate are plugged.

4WEH . . . T . . .

The pilot oil supply is sourced externally via channel X from a separate circuit. The pilot oil drain is led internally via channel T to tank. Port Y in the subplate is plugged.

1 Plug screw M6-8.8 - pilot oil drain

2 Plug screws M6-8.8 - pilot oil supply

3 Plug screws M8-8.8 - for external sealing

Tightening torques M_A for cover fixing screws:

Size 16: 35 Nm

Size 25: 68 Nm


Tightening torque M_A for pilot valve fixing screws:

Sizes 10 to 32: 9 Nm


Throttle insert

The use of a throttle insert is required if the pilot oil supply in the P channel of the pilot valve is to be limited (see page 188).

This throttle is inserted in the P channel of the pilot valve.

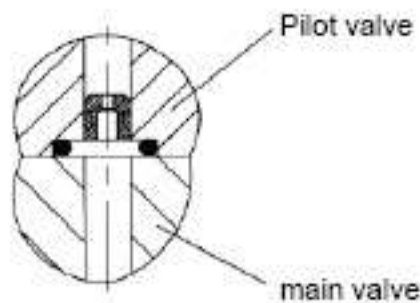


Size 10

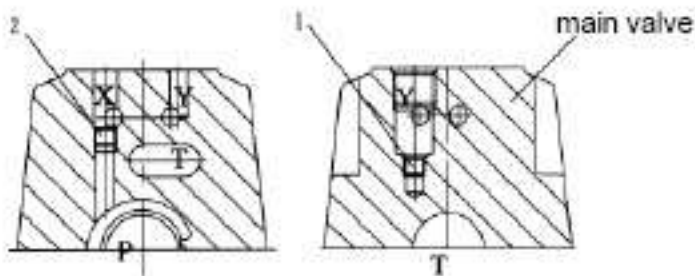

Pilot oil supply
external: 2 plugged
internal: 2 open

Pilot oil drain
external: 1 plugged
internal: 1 open

Size 16

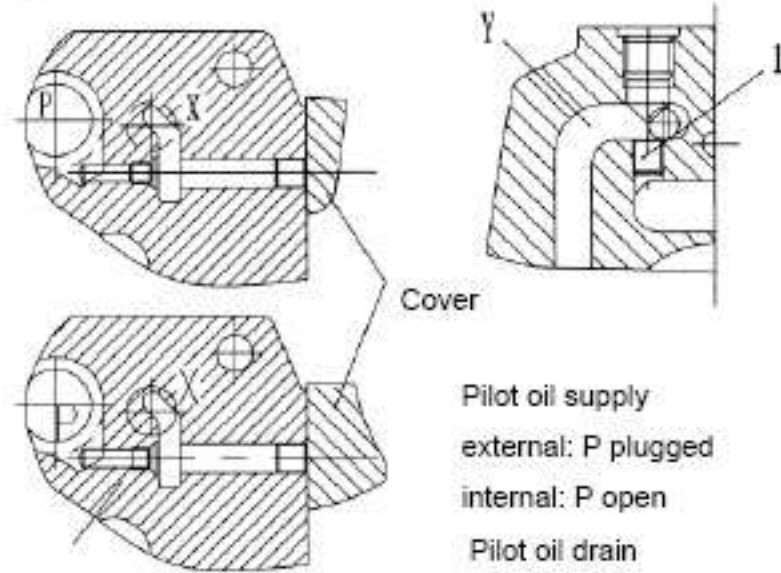


main valve

Cover

Pilot oil supply
external: P plugged
internal: P open
Pilot oil drain
external: 1 plugged
internal: 1 open

Size 25

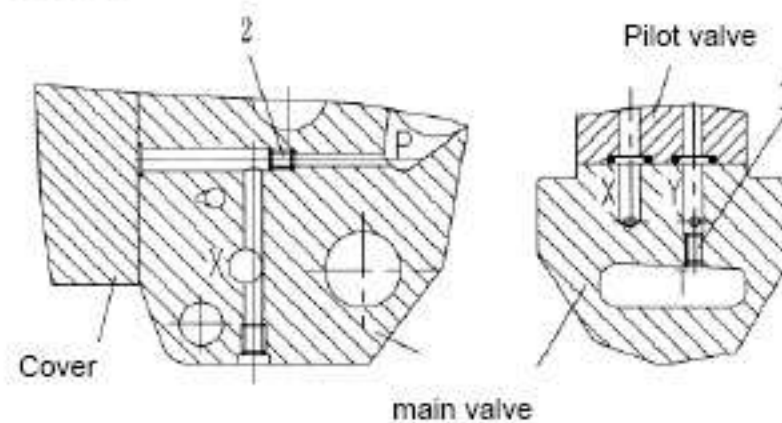

Cover


main valve

Pilot oil supply
external: 2 plugged
internal: 2 open

Pilot oil drain
external: 1 plugged
internal: 1 open

Size 32


Pilot valve

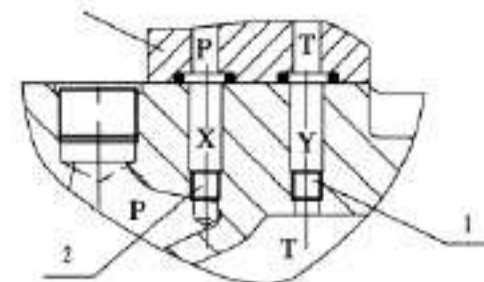

Pilot oil supply
external: 2 plugged
internal: 2 open

Pilot oil drain
external: 1 plugged
internal: 1 open

Functional, section

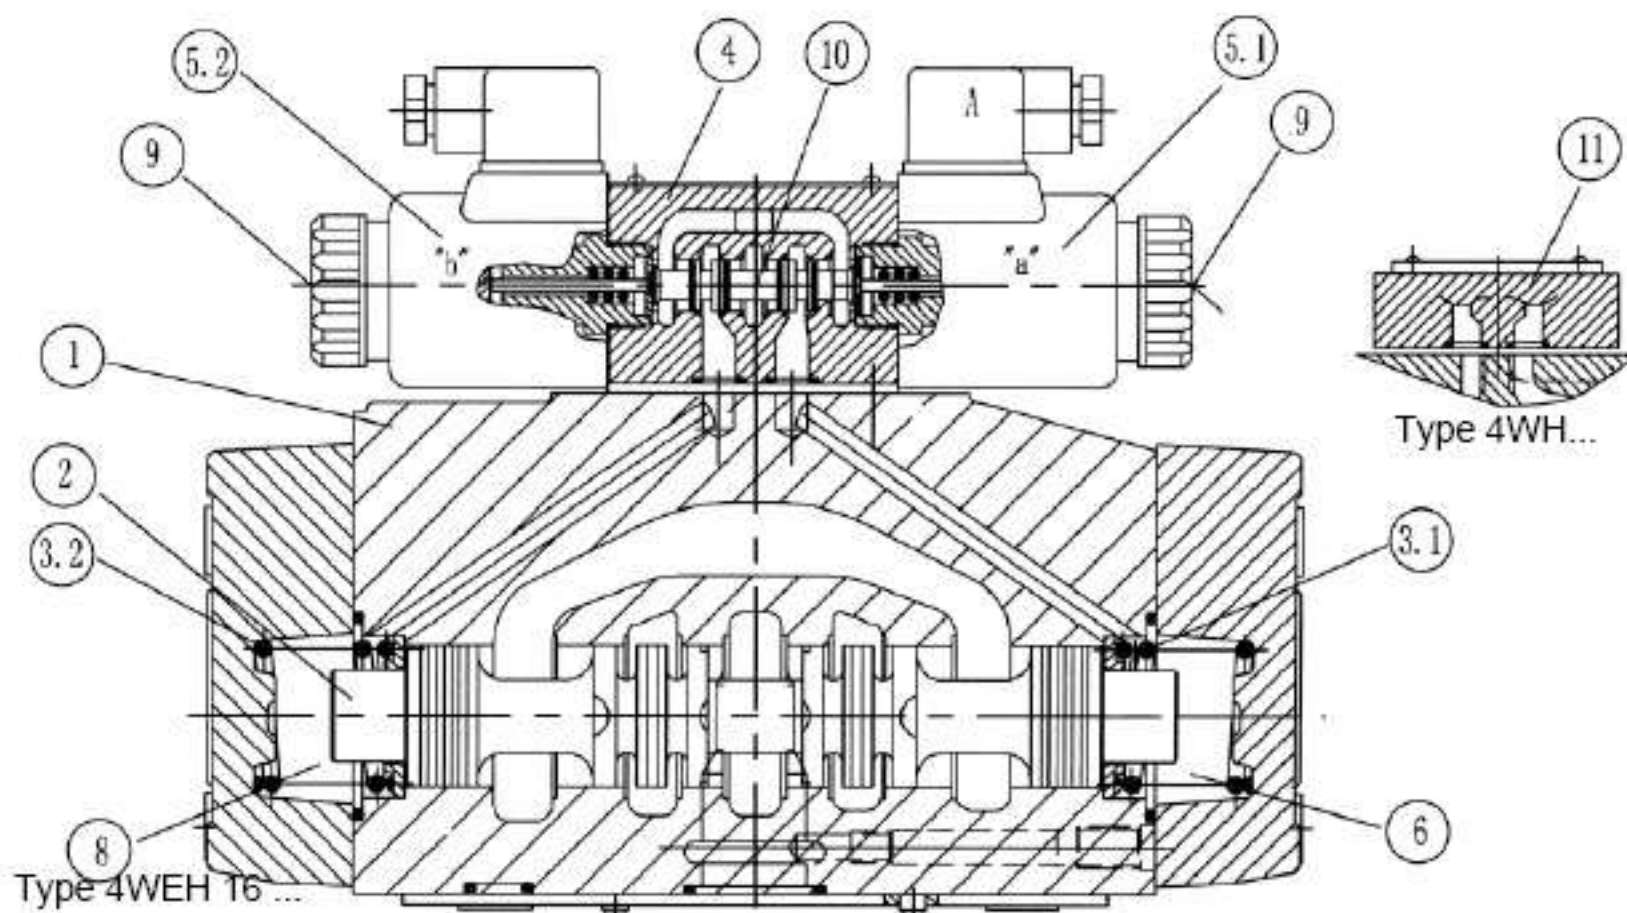

Directional valves type 4WEH...

Valves of type WEH are directional spool valves with electro-hydraulic operation.

They control the start, stop and direction of a fluid flow.

The directional valves basically consist of the main valve with housing (1), main control spool (2), one or two return springs (3.1) and (3.2), and the pilot valve (4) with one or two solenoids "a" (5.1) and/or "b" (5.2).

The main control spool (2) in the main valve is held in the neutral or in the initial position either by the springs or by means of pressure.

In the initial position, the two spring chambers (6) and (8) are connected to the tank without pressure via the pilot valve (4). The pilot valve is supplied with pilot fluid via the pilot line. The pilot oil supply can be either internal or external (external via port X).

When the pilot valve is operated, e.g. solenoid "a", the pilot spool (10) is shifted to the left and thus spring chamber (8) is pressurized with pilot pressure. Spring chamber (6) remains un-pressurized.

The pilot pressure acts on the left side of the main control spool (2) and pushes it against the spring (3.1). As a consequence, the ports P to B and A to T are connected in the main valve.

When the solenoid is de-energized, the pilot spool returns to its initial position (exception: detented spool). The spring chamber (8) is unloaded to tank.

The pilot oil is expelled from the spring chamber via the pilot valve into the Y channel.

The pilot oil supply and drain are internal or external (external via port Y).

An optional manual override (9) permits pilot spool (10) to be operated without energizing the solenoid.

Directional valves type 4WH...

Valves of type WH are directional spool valves with hydraulic operation.

They control the start, stop and direction of a fluid flow.

The directional valves basically consist of the valve housing (1), the main control spool (2), one or two return springs (3.1) and (3.2) in the case of valves with spring return or spring centring, and the pilot connecting plate (11).

The control spool (2) is operated directly by means hydraulic pressure.

The control spool (2) is held in the neutral or in the initial position either by springs or by means of pressure. Pilot oil supply and pilot oil drain are external (see page 2).

4/3-way directional valve with spring centring of the control spool

In this model, the main control spool (2) is held in the neutral position by two return springs (3.1) and (3.2). The two spring chambers (6) and (8) are connected to ports X and Y via the connector plate (11).

When one of the two ends of the main control spool (2) is pressurized with pilot pressure, the spool is moved to the shifted position. The required ports in the valve are then opened to flow.

When the pilot pressure is removed, the spring on the opposite side to the pressurized spool area causes the spool to return to its neutral or initial position.

Shifting time adjustment, pressure reducing valve, pre-load valve



Shifting time adjustment

In order to influence the shifting time of the main valve (1) a double throttle check valve (12) is installed.

Change over from meter-in (13) to meter-out control (14): Remove the pilot valve 4 (leave the O-ring support plate (15) in place), rotate the throttle check valve (12) about its longitudinal axis and refit it, replace the pilot valve (4).

Tightening torque for screws (16)

$M_A = 9 \text{ Nm}$.

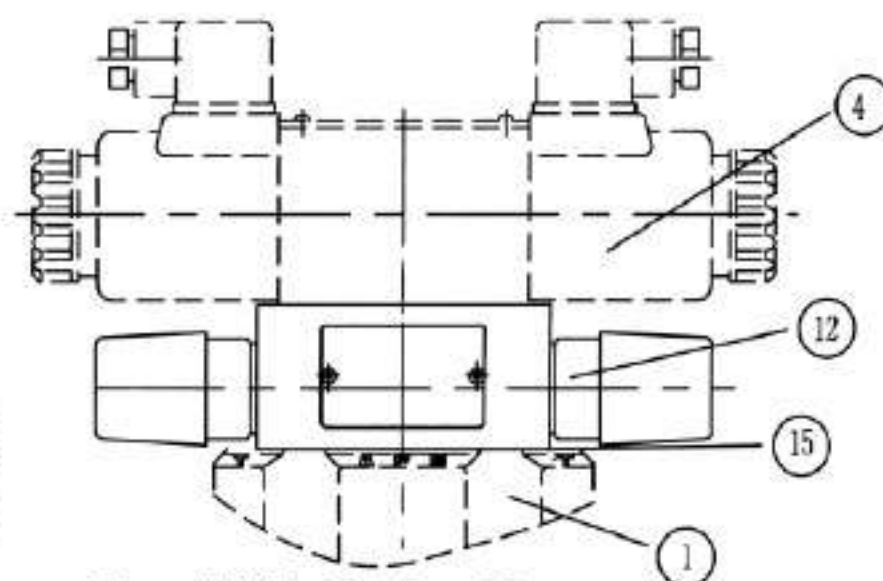


Type 4WEH..60/...S or S2

Pressure reducing valve "D3"

The pressure reducing valve (17) must be used if the pilot pressure is higher than 25 MPa. Thus, the secondary pressure is held constant at 4.5 MPa. When using a pressure reducing valve "D3" (17), a throttle insert "B10" must be installed in the P channel of the pilot valve.

Tightening torque for screws (16) $M_A = 9 \text{ Nm}$.

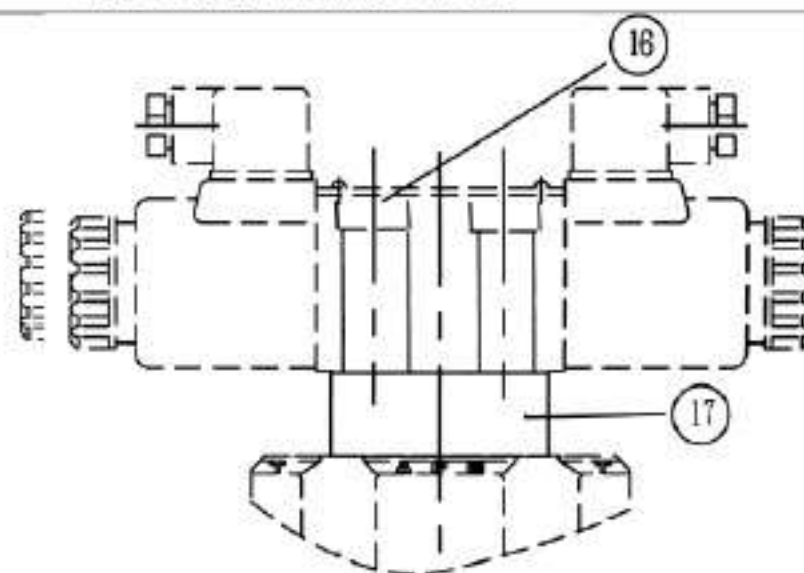


Type 4WEH..60/.../..D3

Pre-load valve (not for size 10)


In valves with pressureless by-pass and internal pilot oil supply, a pre-load valve (18) must be installed in the P channel of the main valve to build up the minimum pilot pressure.

The pressure difference of the pre-load valve must be added to the pressure difference of the main valve (see characteristic curve) in order to determine the actual value.

The cracking pressure of this valve is approx. 0.45 MPa.

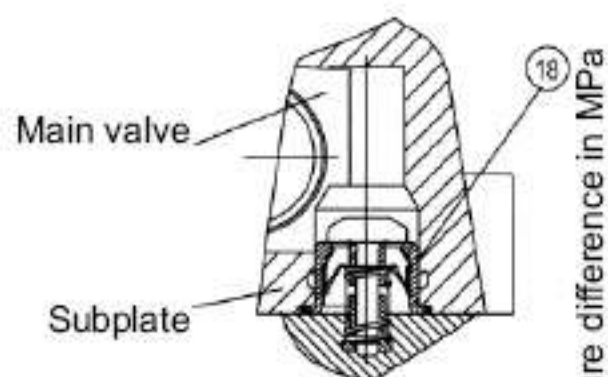

$\Delta p/q_v$ characteristic curve (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

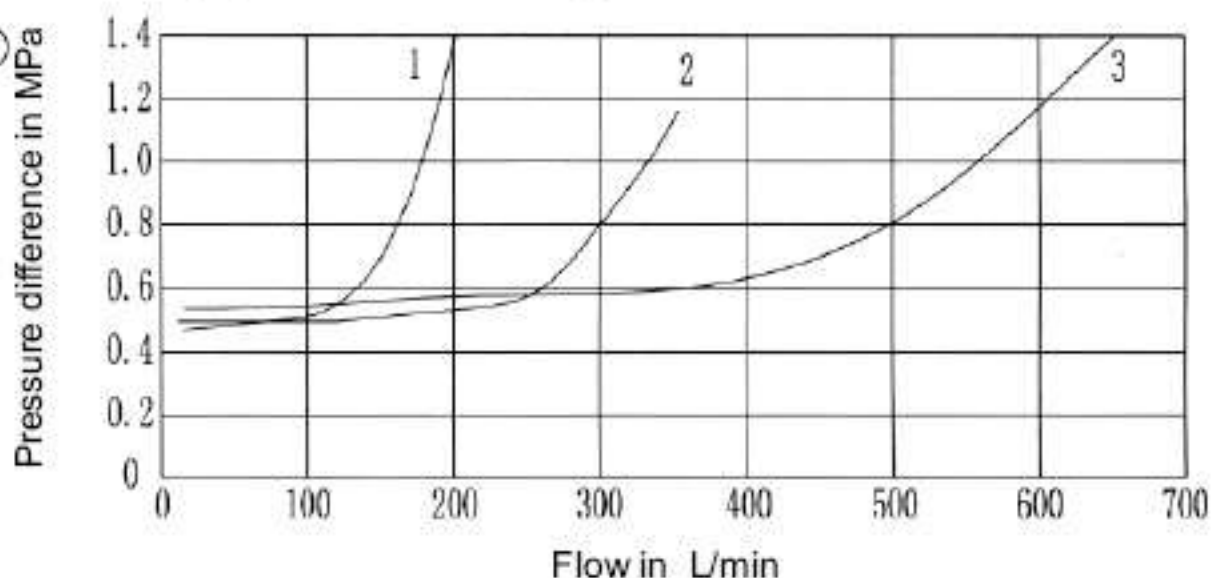

- 1 Size 16
- 2 Size 25
- 3 Size 32.

Ordering code

4 B / / *

pressure of operation
Up to 28 MPa = No code
Up to 35 MPa = H -

4-way design = 4

Types of operation
Electro-hydraulic = WEH
Hydraulic = WH

Size
Size 10 = 10
Size 16 = 16
Size 25 = 25
Size 32 = 32

Spool return
By means of springs = No code
Hydraulic = H

For symbols, see page 189

Series 40 to 49 (size 10) ¹⁾ = 40
Series 60 to 69 (sizes 16, 25, 32) ¹⁾ = 60

Technology of Beijing Huade Hydraulic =B

Spool return in the pilot valve for 2-position valve and 2 solenoids only possible with spools C, D, K, Z and hydraulic spool return in the main valve:
Without spring return = O
Without spring return with detent = OF

Pilot valve with wet-pin solenoids
Standard valve = A
High-performance valve = E

12 V DC =G12
220 V AC 50 Hz =W220-50
24 V DC =G24
DC solenoid commuting automatically =W220R

Further details in clear text

No code = mineral oils
V = phosphate ester

No code = Without pressure reducing valve
D3 ²⁾ = With pressure reducing valve

Pre-load valve (not for size 10)
No code = Without pre-load valve
P 4.5 = With pre-load valve

No code = Without throttle insert
B08 = Throttle Φ 0.8 mm
B10 = Throttle Φ 1.0 mm
B12 = Throttle Φ 1.2 mm
B15 = Throttle Φ 1.5 mm

Additional equipment NO. (see Additional equipment)

Type of electrical connection
(see dimensions of electrical connection on page 181)

No code = Without shifting time adjustment
S = Shifting time adjustment as meter-in control
S2 = Shifting time adjustment as meter-out control

No code = Pilot oil supply external, drain external
E = Pilot oil supply internal, drain external
ET ³⁾ = Pilot oil supply internal, drain internal
T = Pilot oil supply external, drain internal
Type 4WH...only available as No code!
Versions ET and T as 3-position valve with pressure centring only possible if $p_{pilot} \geq 2 \times p_{tank} + p_{pilot min}$!






No code = Without manual override
N = With manual override
N9 = With protected manual override

- 1) Unchanged installation and connection dimensions
- 2) Only in conjunction with throttle insert "B10"
- 3) With internal pilot oil supply:
Minimum pilot pressure: Please note page 192!

In order to avoid excessive pressure peaks, a throttle insert (B10) should be provided in the P port of the pilot valve .

- 4) Plug-in connectors have to be ordered separately

Symbols

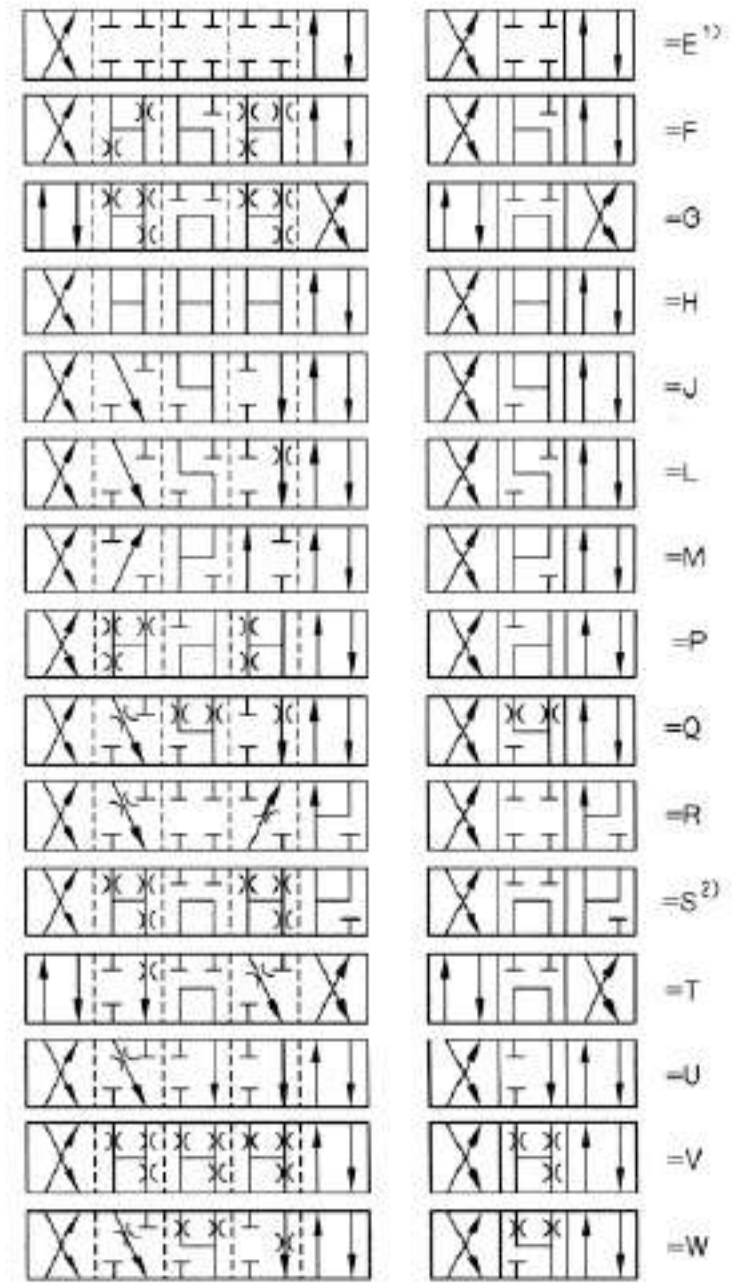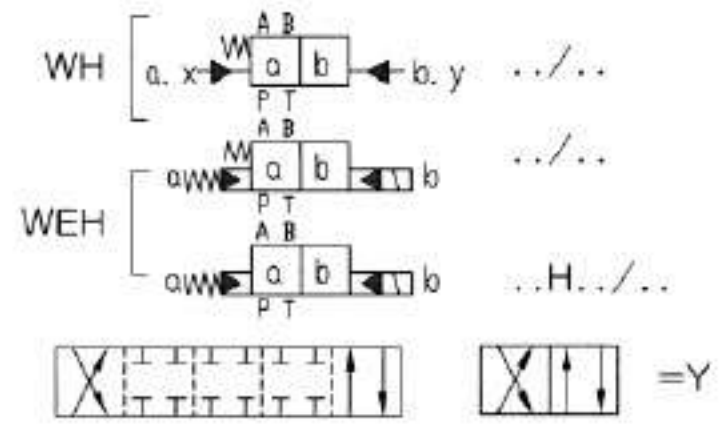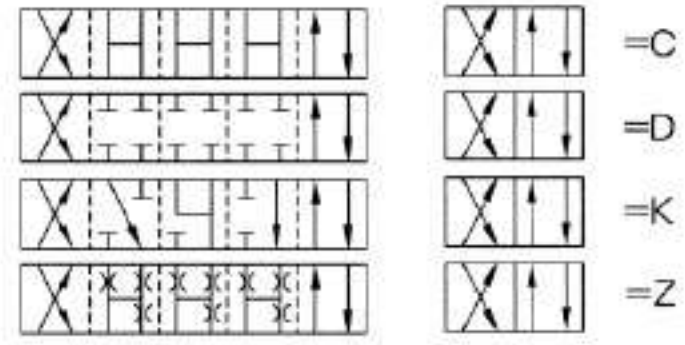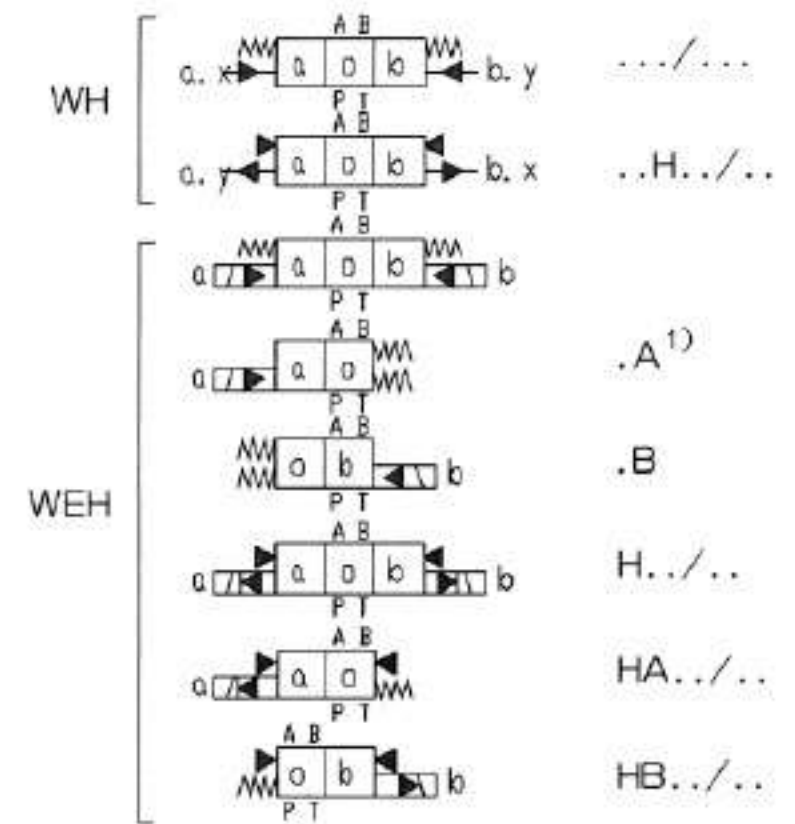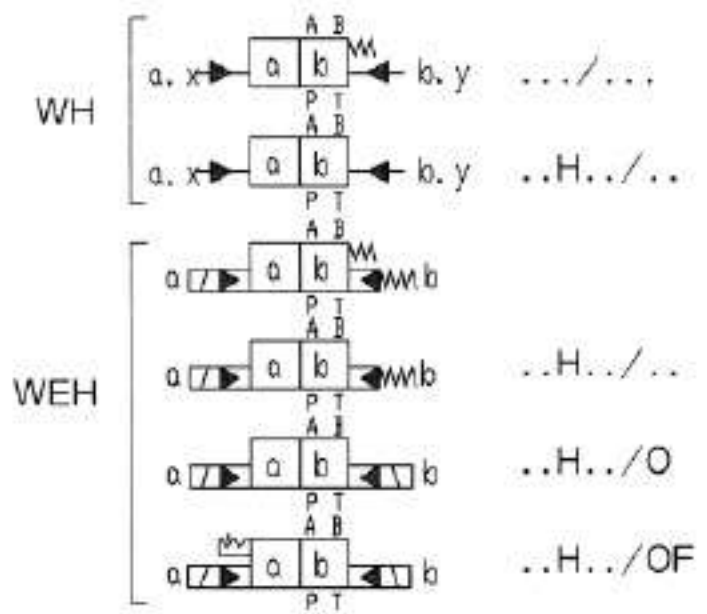

1) Example: Spool E, solenoid on side "a"
 Order example:
 H-4WEH 16 HEA60/6AG24N9ETSK4..B10..V..

2) Spool S only for size 16

Valve opening in neutral position for spools Q, V and W

Spool	Size	Valve opening in neutral position (in mm ²)			
		10	16	25 (type 4W.H 25.60B/...)	32
Q	P-A	-	-	-	-
	P-B	-	-	-	-
	A-T	13	32	83	78
	B-T	13	32	83	78
	P-A	13	32	83	73
V	P-B	13	32	83	73
	A-T	13	32	83	84
	B-T	13	32	83	84
	P-A	-	-	-	-
W	P-B	-	-	-	-
	A-T	2.4	6	14	20
	B-T	2.4	6	14	20
	P-A	-	-	-	-

Detailed and simplified symbols for 3-position valves

	Valve with spring-centred neutral position	Valve with pressure-centred neutral position only sizes 16, 25 (type 4W.H 25 .60/... and 32)
X = external; Y = external	<p>Type 4WEH.../..</p>	<p>Type 4WEH..H.../..</p>
X = internal; Y = external	<p>Type 4WEH.../..E..</p>	<p>Type 4WEH..H.../..E..</p>
X = internal; Y = internal	<p>Type 4WEH.../..ET..</p>	<p>3-position valves, pressure-centred, preferably with external pilot oil supply and/or drain (No code, E) For the preconditions for internal pilot oil supply and/or drain (ET, T) see page 188 or 192.</p>
X = external; Y = internal	<p>Type 4WEH.../..T..</p>	

Detailed and simplified symbols for 2-position valves

	Valves with spring offset		Valves with hydraulic offset	
X = external; Y = external	<p>Type 4WEH.../...</p>	<p>Type 4WEH..H.../...</p>	<p>Type 4WEH..H/O...</p>	<p>Type 4WEH..H/OF...</p>
X = internal; Y = external	<p>Type 4WEH.../...E...</p>	<p>Type 4WEH..H.../...E...</p>	<p>Type 4WEH..H/O...E...</p>	<p>Type 4WEH..H/OF...E...</p>
X = internal; Y = internal	<p>Type 4WEH.../...ET...</p>	<p>Type 4WEH..H.../...ET...</p>	<p>Type 4WEH..H/O...ET...</p>	<p>Type 4WEH..H/OF...ET...</p>
X = external; Y = internal	<p>Type 4WEH.../...T...</p>	<p>Type 4WEH..H/...T...</p>	<p>Type 4WEH..H/O...T...</p>	<p>Type 4WEH..H/OF...T...</p>


Technical data (For applications outside these parameters, please consult us!)								
Sizes (ordering code)			10	16	25	32		
Operating pressure, max. Type 4WEH (MPa)			28	28	28	28		
- Port P, A, B	Type H-4WEH (MPa)		35	35	35	35		
- Port T	Pilot oil drain Y external (MPa)		31.5 ⁵⁾	25	25	25		
	Pilot oil drain Y internal ¹⁾		16 ⁶⁾ /21 ⁷⁾ DC 10 ⁶⁾ /16 ⁷⁾ AC					
- Port Y - DC (MPa)			16 ⁶⁾ /21 ⁷⁾ DC					
Pilot oil drain external: - AC (MPa)			10 ⁶⁾ /16 ⁷⁾ AC					
	with version 4WH (MPa)		25					
Pilot pressure, max. (MPa)			25					
(With higher pilot pressures, a pressure reducing valve is required.)								
Pilot pressure, min.			H-4W....					
- Pilot oil supply X external, pilot oil supply X internal (not with spools: C, F, G, H, P, T, V, Z, S ²⁾)								
	3-position valve, spring-centred (MPa)		1.0	1.4	1.3	0.85		
	3-position valve, pressure-centred (MPa)		-	1.4	1.8	0.85		
	2-position valve, with spring offset (MPa)		1.0	1.4	1.3	1.0		
	2-position valve, with hydraulic offset (MPa)		0.7	1.4	0.8	0.5		
- pilot oil supply X internal (with spools C, F, G, H, P, T, V, Z, S ²⁾) (MPa)			4.5 ³⁾	4.5 ⁴⁾	4.5 ⁴⁾	4.5 ⁴⁾		
1) As 3-position valve with spring-centring only possible if $p_{pkt} \geq 2 \times p_{tank} + p_{pilot min}$			minimum pressure difference of 0.65 MPa from P to T.					
2) Spool S only for size 16			4) For spools C, F, G, H, P, T, V, Z, S (by means of a pre-load valve or a sufficiently large flow)					
3) For symbols C, F, G, H, P, T, V, Z internal pilot oil supply is only possible, if the flow from P to T in the neutral position (in a 3-position valve) or when the valve is moving through the neutral position (in a 2-position valve) is large enough to ensure a			5) Type 4WEH 10...: 28 MPa Type H-4WEH 10...: 31.5 MPa					
			6) Standard valve "6A"					
			7) High-performance valve "6E"					
Hydraulic fluid			Mineral oil (for NBR seal) or Phosphate ester (for FPM seal)					
Fluid temperature range (°C)			- 30 to + 80					
Viscosity range (mm ² /s)			2.8 to 500					
Cleanliness			Maximum permissible degree of contamination of the hydraulic fluid to NAS 1638 class 9. We therefore recommend a filter with a minimum retention rate of $\beta_{10} \geq 75$.					
Pilot oil volume for shifting operation :								
- 3-position valve, spring-centred (cm ³)			2.04	5.72	14.2	29.4		
- 2-position valve (cm ³)			4.08	11.75	28.4	58.8		
- 3-position valve, pressure-centred				WH	WEH	WH	WEH	
	From neutral position to shifted position "a" (cm ³)		2.83	2.83	7.15	7.15	14.4	14.4
	From shifted position "a" to neutral position (cm ³)		2.9	5.73	14.18	7.0	29.4	15.1
	From neutral position to shifted position "b" (cm ³)		5.72	5.73	14.18	14.15	29.4	29.4
	From shifted position "b" to neutral position (cm ³)		2.83	8.55	19.88	5.73	43.8	14.4
Pilot oil flow for shortest shifting time (L/min)			approx.35	approx.35	approx.35	approx.45.0		
weight	Valve with one solenoid (kg)		approx.6.4	approx.8.5	approx.17.6	approx.40.5		
	Valve with two solenoids, spring-centred (kg)		approx.6.8	approx.8.9	approx.18.0	approx.41.0		
	Valve with two solenoids, pressure-centred (kg)		approx.6.8	approx.8.9	approx.19.0	approx.41.0		
	Valve with hydraulic operation (4WH...) (kg)		approx.5.5	approx.7.3	approx.16.5	approx.39.5		
	Shifting time adjustment (kg)		approx.0.8					
	Pressure reducing valve (kg)		approx.0.4					
Installation position			optional; valve with hydraulic spool return "H"(spools C, D, K, Z, Y) horizontal					

Shifting times

Shifting time = Contacting at the pilot valve up to start of opening of the control land in the main valve

Size 10 Pilot valve series 50/A	Shifting time of the valve from neutral position to shifted position with AC (~) and DC (=) operation																	
	at pilot pressure	(MPa)	~ 7=				~ 14=				~ 21=				~ 25=			
	- 3-position valve	(ms)	30	65	25	60	20	55	15	50								
	- 2-position valve	(ms)	35	80	30	75	25	70	20	65								
	Shifting time of the valve from shifted position to neutral position																	
	- 3-position valve	(ms)	30															
	- 2-position valve	(ms)	35	40	30	75	25	30	20	25								
Size 16 Pilot valve series 60/E	Shifting time of the valve from neutral position to shifted position with AC (~) and DC (=) operation																	
	at pilot pressure	(MPa)	~ 7=				~ 14=				~ 21=				~ 25=			
	- 3-position valve, spring-centred	(ms)	25...30	40	25...30	40	25...30	40	20...25	40								
	- 2-position valve	(ms)	30...35	55	30...35	55	30...35	55	25...30	50								
	- 3-position valve	Solenoid operated	a	b	a	b	a	b	a	b	a	b	a	b	a	b		
	pressure-centred	(ms)	30	30	40	40	30	30	40	40	30	30	35	40	30	30	35	40
	Shifting time of the valve from shifted position to neutral position																	
	- 3-position valve	(ms)	20 to 35 for ~ ; 30 for =															
	- 2-position valve	(ms)	35...50	45	35...50	45	30...45	40	30...45	35								
	- 3-position valve	from -	a	b	a	b	a	b	a	b	a	b	a	b	a	b		
pressure-centred	(ms)	20...35	20	20...35	20	20...35	20	20...35	20	20...35	20	20...35	20					
Size 25 (4W, H 25, 60)	Shifting time of the valve from neutral position to shifted position with AC (~) and DC (=) operation																	
	at pilot pressure	(MPa)	~ 7=				~ 14=				~ 21=				~ 25=			
	- 3-position valve, spring-centred	(ms)	50	85	40	75	35	70	30	65								
	- 2-position valve	(ms)	120	160	100	130	85	120	70	105								
	- 3-position valve	Solenoid operated	a	b	a	b	a	b	a	b	a	b	a	b	a	b		
	pressure-centred	(ms)	30	35	55	65	30	35	55	65	25	30	50	60	25	30	50	60
	Shifting time of the valve from shifted position to neutral position																	
	- 3-position valve	(ms)	40 to 55 for ~ ; 40 for =															
	- 2-position valve	(ms)	120	125	85	100	85	90	75	80								
	- 3-position valve	from -	a	b	a	b	a	b	a	b	a	b	a	b	a	b		
pressure-centred	(ms)	30...50	30	35	30...50	30	50	30...50	30	35	30...50	30	35					
Size 32 Pilot valve series 50/A	Shifting time of the valve from neutral position to shifted position with AC (~) and DC (=) operation																	
	at pilot pressure	(MPa)	~ 5=				~ 15=				~ 25=							
	- 3-position valve, spring-centred	(ms)	65	80	50	90	35	105										
	- 2-position valve	(ms)	100	130	75	100	60	115										
	- 3-position valve	Solenoid operated	a	b	a	b	a	b	a	b	a	b	a	b				
	pressure-centred	(ms)	55	60	100	105	40	45	85	95	35	40	85	95				
	Shifting time of the valve from shifted position to neutral position																	
	- 3-position valve	(ms)	60 to 75 for ~ ; 50 for =															
	- 2-position valve	(ms)	115...130	90	85...100	70	65...80	65										
	- 3-position valve	from -	a	b	a	b	a	b	a	b	a	b	a	b				
pressure-centred	(ms)	30...65	30	40	60...90	30	30	105...155	50	50								

Characteristic curves: Type 4WEH 10...(measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

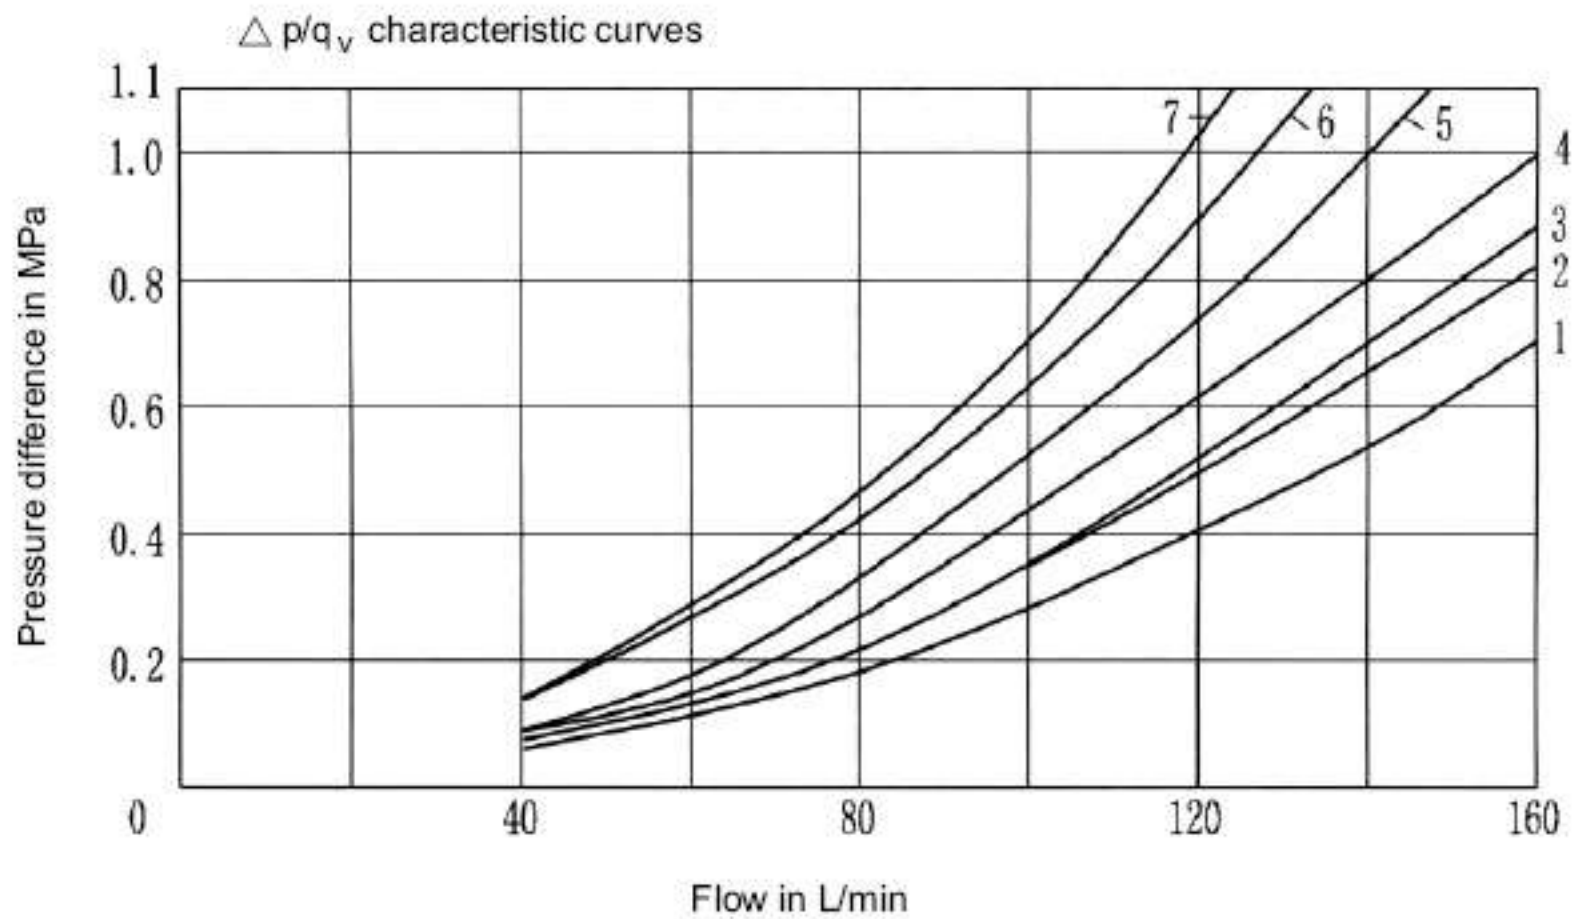

Spool	Shifted position				Spool	Neutral position		
	P-A	P-B	A-T	B-T		A-T	B-T	P-T
E,D,Y2	2	4	5	F	3	-	6	
F	1	4	1	4	G,T	-	-	7
G,T	4	2	2	6	H	1	3	5
H,C	4	4	1	4	L	L	3	- -
J,K	1	2	1	3	P	-	7	5
L	2		3	1	U	-	4	-
M	4	4	3	4				
Q,V,W,Z	2	2	3	5				
R	2	2	3	-				
U	3	3	3	4				
P	4	1	3	4				

Shifting performance limits: Type 4WEH 10...(measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

2 and 3-position valves (Permissible flow q_v in L/min)			
Spool	Operating pressure p_{max} in MPa		
	20	25	31.5
E, J, L, M, Q, R, U, V, W, C, D, K, Z, Y	160		
H	160	150	120
G, T	160	160	140
F, P	160	140	120

General:

Attention!


The shifting performance limits shown are valid for applications with two directions of flow (e.g. from P to A and simultaneous return flow from B to T).

As a result of the flow forces occurring within the valve with only one direction of flow (e.g. from P to A with port B blocked) the permissible performance limits may be considerably lower!

(In the case of applications of this kind, please consult us.)

The performance limits were determined with the solenoid at operating temperature, 10% undervoltage and with no tank pre-loading.

Characteristic curves: Type 4WEH 16...(measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

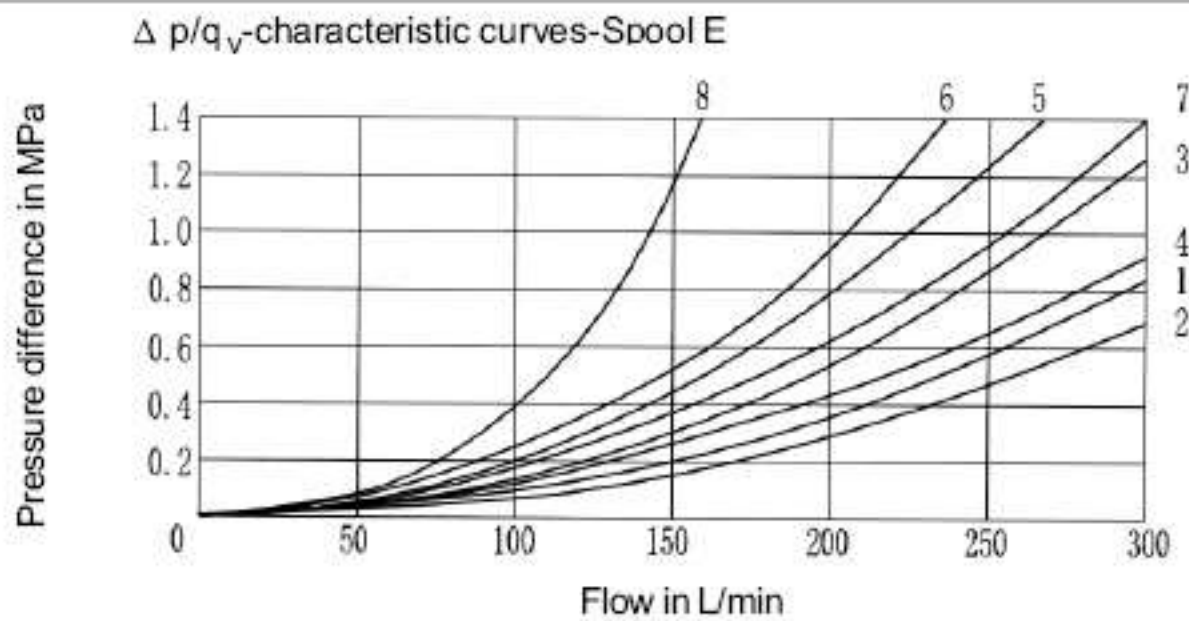

Spool	Shift position				
	P-A	P-B	A-T	B-T	P-T
E,D,Y	1	1	1	3	-
F,P	2	2	3	3	-
G,T	5	1	3	7	6
H,C,Q,V,Z	2	2	3	3	-
J,K,L	1	1	3	3	-
M,W	2	2	4	3	-
R	2	2	4	-	-
U	1	1	4	7	-
S	4	4	4	-	8

Performance limits: Type 4WEH 16...(measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

2-position valves Permissible flow q_v in L/min						Pre-load valve, required for X = internal
Spool	Operating pressure p_{max} in MPa					
	7	14	21	28	35	
with spring offset in the main valve ¹⁾						Spool C and Z up to approx. 160L/min
C, D, K, Z, Y	300	300	300	300	300	
with spring offset in the main valve ²⁾						
C	300	300	300	300	300	
D, Y	300	270	260	250	230	Spool HC and HZ up to approx. 160L/min
K	300	250	240	230	210	
Z	300	260	190	180	160	
with hydraulic offset in the main valve						Spool V up to ca. 160 L/min
HC, HD, HK	300	300	300	300	300	
HZ, HY	300	300	300	300	300	

3-position valves Permissible flow q_v in L/min						Pre-load valve, required for X = internal
Spool	Operating pressure p_{max} in MPa					
	7	14	21	28	35	
spring-centred						Spools F, G, H, P and S in general
E, H, J, L, M, QUWR	300	300	300	300	300	
F, P	300	250	180	170	150	
G, T	300	300	240	210	190	
S	300	300	300	250	220	
V	300	250	210	200	180	Spool V up to ca. 160 L/min
pressure-centred (at min. pilot pressure of 1.6 MPa)						
for all spools						300

- 1) The flow values given are achieved when the minimum pilot pressure of 1.2 MPa is present.
- 2) The flow values given are limiting values at which the return spring can return the valve when the pilot pressure fails.


Attention!

When using 4/3-way directional valves with spring-centring of the control spool in the main valve, which exceeds the given performance limits, a higher pilot pressure is required.

Example: At an operating pressure of $p_{max} = 35 \text{ MPa}$ and a flow of $q_v = 300 \text{ L/min}$, a pilot pressure of 1.6 MPa is required.

The maximum flow for those valves is therefore only dependent on the Δp value which is acceptable for the system.

Characteristic curves: Type 4WEH 25...(measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

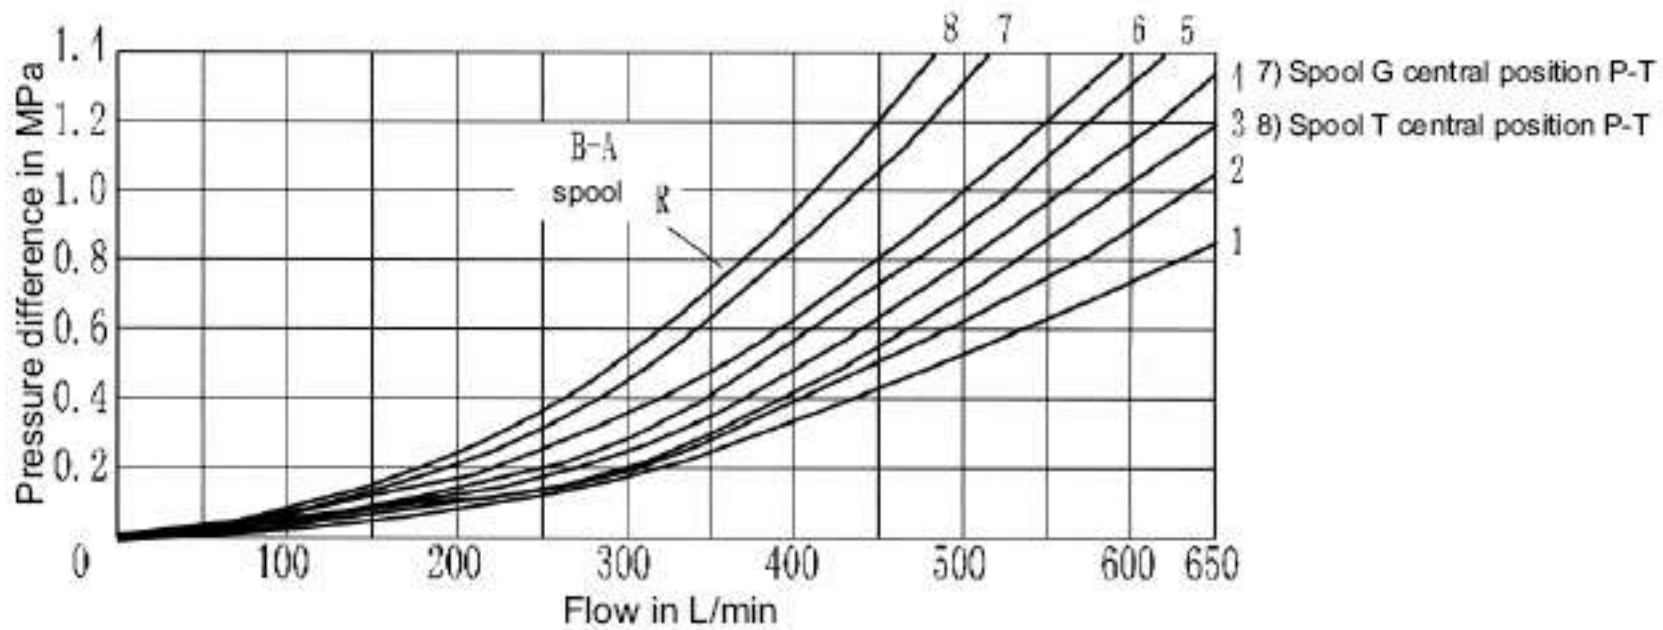

Spool	Shifted position				Spool	Neutral position			
	P-A	P-B	A-T	B-T		P-A	P-B	A-T	B-T
E	1	1	1	3	P	4	1	1	5
F	1	4	3	3	Q	2	2	3	5
G	3	1	2	4	R	2	1	1	-
H	4	4	3	4	U	2	1	1	6
J	2	2	3	5	V	4	4	3	6
L	2	2	3	3	W	1	1	1	3
M	4	4	1	4	T	3	1	2	4

Performance limits: Type 4WEH 25...(measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)


2-position valves Permissible flow q_v in L/min						Pre-load valve, required for X = internal
Spool	Operating pressure Δp in MPa					
	7	14	21	28	35	
with spring offset in the main valve ¹⁾						Spool C and Z up to approx. 180 L/min
C, D, K, Z, Y	700	700	700	700	650	
with spring offset in the main valve ²⁾						
C	700	700	700	700	700	
D, Y	700	650	400	350	300	
K	700	650	420	370	320	
Z	700	700	650	480	400	
with hydraulic offset in the main valve						Spool HC and HZ up to approx. 180 L/min
HC, HD, HK	700	700	700	700	700	
HZ, HY	700	700	700	700	700	
HC.../O	700	700	700	700	700	
HD.../O	700	700	700	700	700	
HK.../O	700	700	700	700	700	
HZ.../O	700	700	700	700	700	
HC.../OF	700	700	700	700	700	
HD.../OF	700	700	700	700	700	
HK.../OF	700	700	700	700	700	
HZ.../OF	700	700	700	700	700	

3-position valves Permissible flow q_v in L/min						Pre-load valve, required for X = internal
Spool	Operating pressure Δp in MPa					
	7	14	21	28	35	
spring-centred						Spools F, G, H, P and T in general, spool V up to approx. 180 L/min
E, L, M, Q, U, W	700	700	700	700	650	
G, T	400	400	400	400	400	
F	650	550	430	330	300	
H	700	650	550	400	360	
J	700	700	650	600	520	
P	650	550	430	330	300	
V	650	550	400	350	310	
R	700	700	700	650	580	
pressure-centred (at min. pilot pressure of 1.8MPa)						
E, F, H, J	700	700	700	700	650	
L, M, P, Q	700	700	700	700	650	
R, U, V, W	700	700	700	700	650	
G, T	700	700	700	700	400	
at > 3MPa pilot pressure						
G, T	700	700	700	700	700	

1) The flow values given are achieved when the minimum pilot pressure of 1.3 MPa is present.

2) The flow values given are limiting values at which the return spring can return the valve when the pilot pressure fails.

Characteristic curves: Type WEH 32...(measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

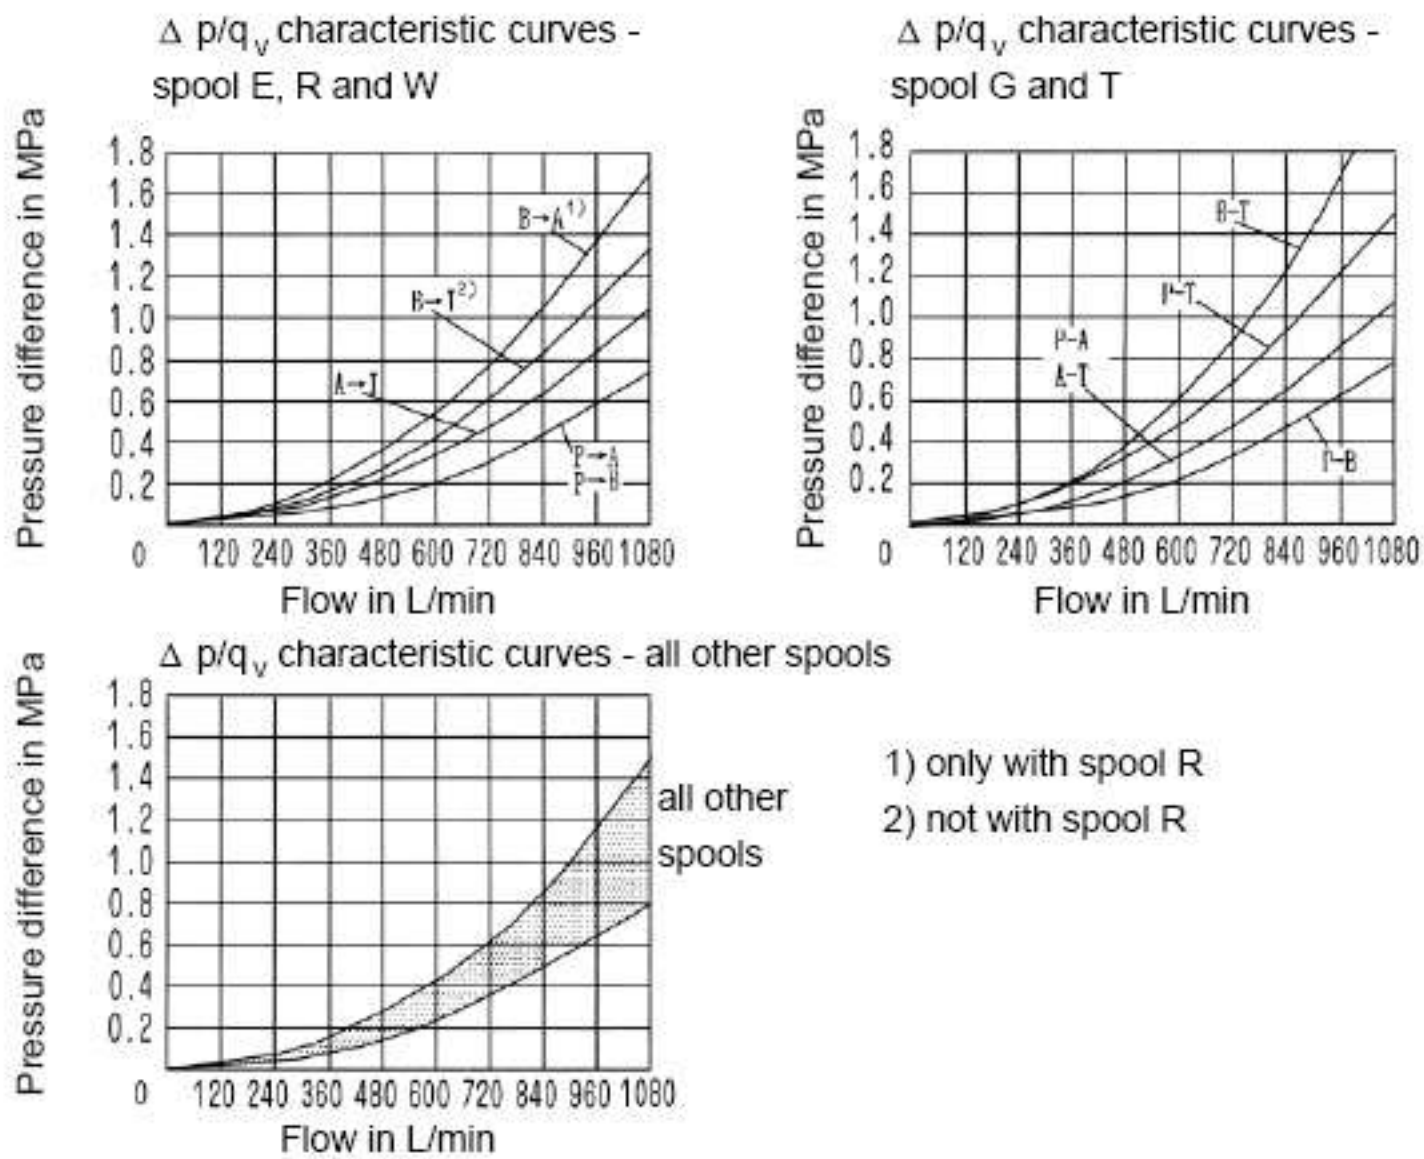

Performance limits: Type WEH 32...(measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$)

2-position valves Permissible flow q_v in L/min					Pre-load valve, required for X = internal	
Spool	Operating pressure p_{max} in MPa					
	7	14	21	28		35
with spring offset in the main valve ¹⁾					spool C in general, spool Z up to approx. 180 L/min	
C, D, K, Z, Y	1100	1040	860	750		680
with spring offset in the main valve ²⁾						
C	1100	1040	860	800		700
D, Y	1100	1040	540	480		420
K	1100	1040	860	500		450
Z	1100	1040	860	700	650	
with hydraulic offset in the main valve					spool C in general, spool Z up to approx. 180 L/min	
HC, HD, HK	1100	1040	860	750		680
HZ, HY	1100	1040	860	750		680


3-position valves Permissible flow q_v in L/min					Pre-load valve, required for X = internal	
Spool	Operating pressure p_{max} in MPa					
	7	14	21	28		35
spring-centred ¹⁾					Spools F, G, H, P and T in general, spool V up to 180 L/min	
E, J, L, M, Q, U, W, R	1100	1040	860	750		680
G, T, H, F, P	900	900	800	650		450
V	1100	1000	680	500		450
pressure-centred (at min. pilot pressure of 0.85MPa)						
for all spools	1100	1040	860	750		680

Attention!
When using 4/3-way directional valves with spring-centring of the control spool in the main valve, which exceeds the given performance limits, a higher pilot pressure is required.

Example: At an operating pressure of $p_{max} = 35 \text{ MPa}$ and a flow of $q_v = 1100 \text{ L/min}$, a pilot pressure of 1.5 MPa is required.

The maximum flow for those valves is therefore only dependent on the Δp value which is acceptable for the system.

- 1) The flow values given are achieved when the minimum pilot pressure of 1MPa is present.
- 2) The flow values given are limiting values at which the return spring can return the valve when the pilot pressure Spools.

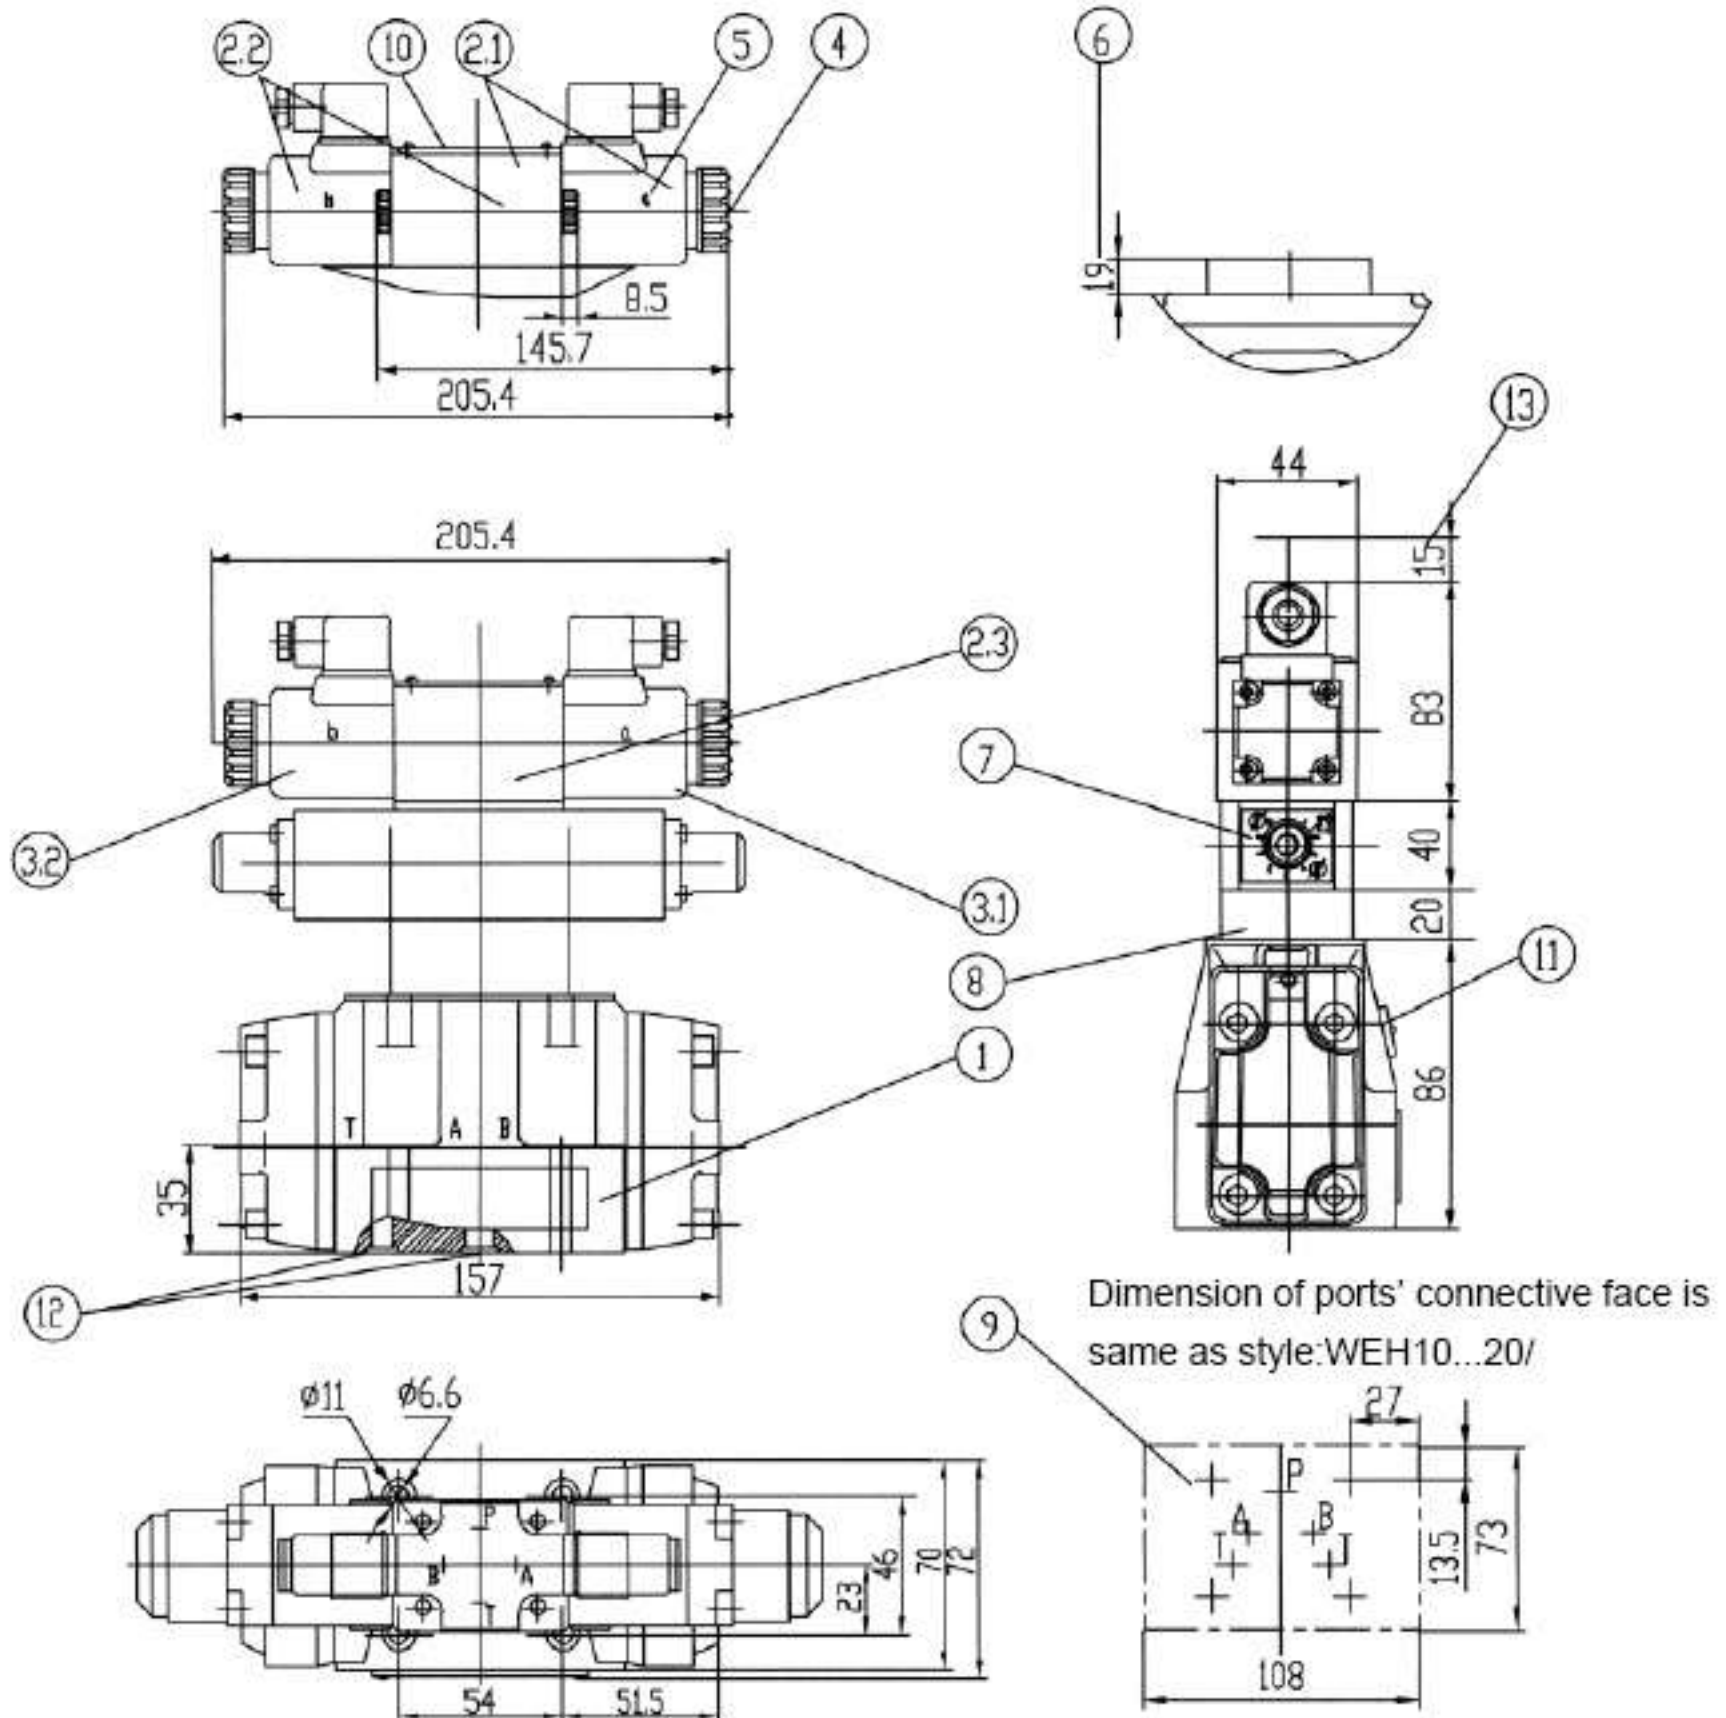

Dimension of ports' connective face is same as style:WEH10...20/

Subplate

G 534/01 (G 3/4"), — without port X, Y

G 535/01 (G 3/4"), > with port X, Y

G 536/01 (G 1")


Valve fixing screws 4- M6 × 45 -10.9


(GB/T70.1-2000)

$M_A = 15.5 \text{ Nm}$


must be ordered separately.

For items list, see page 206,207.

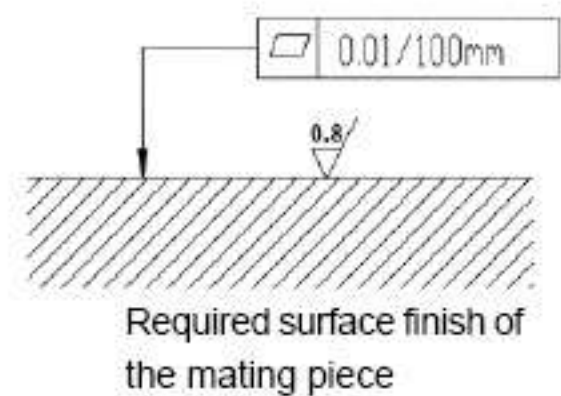

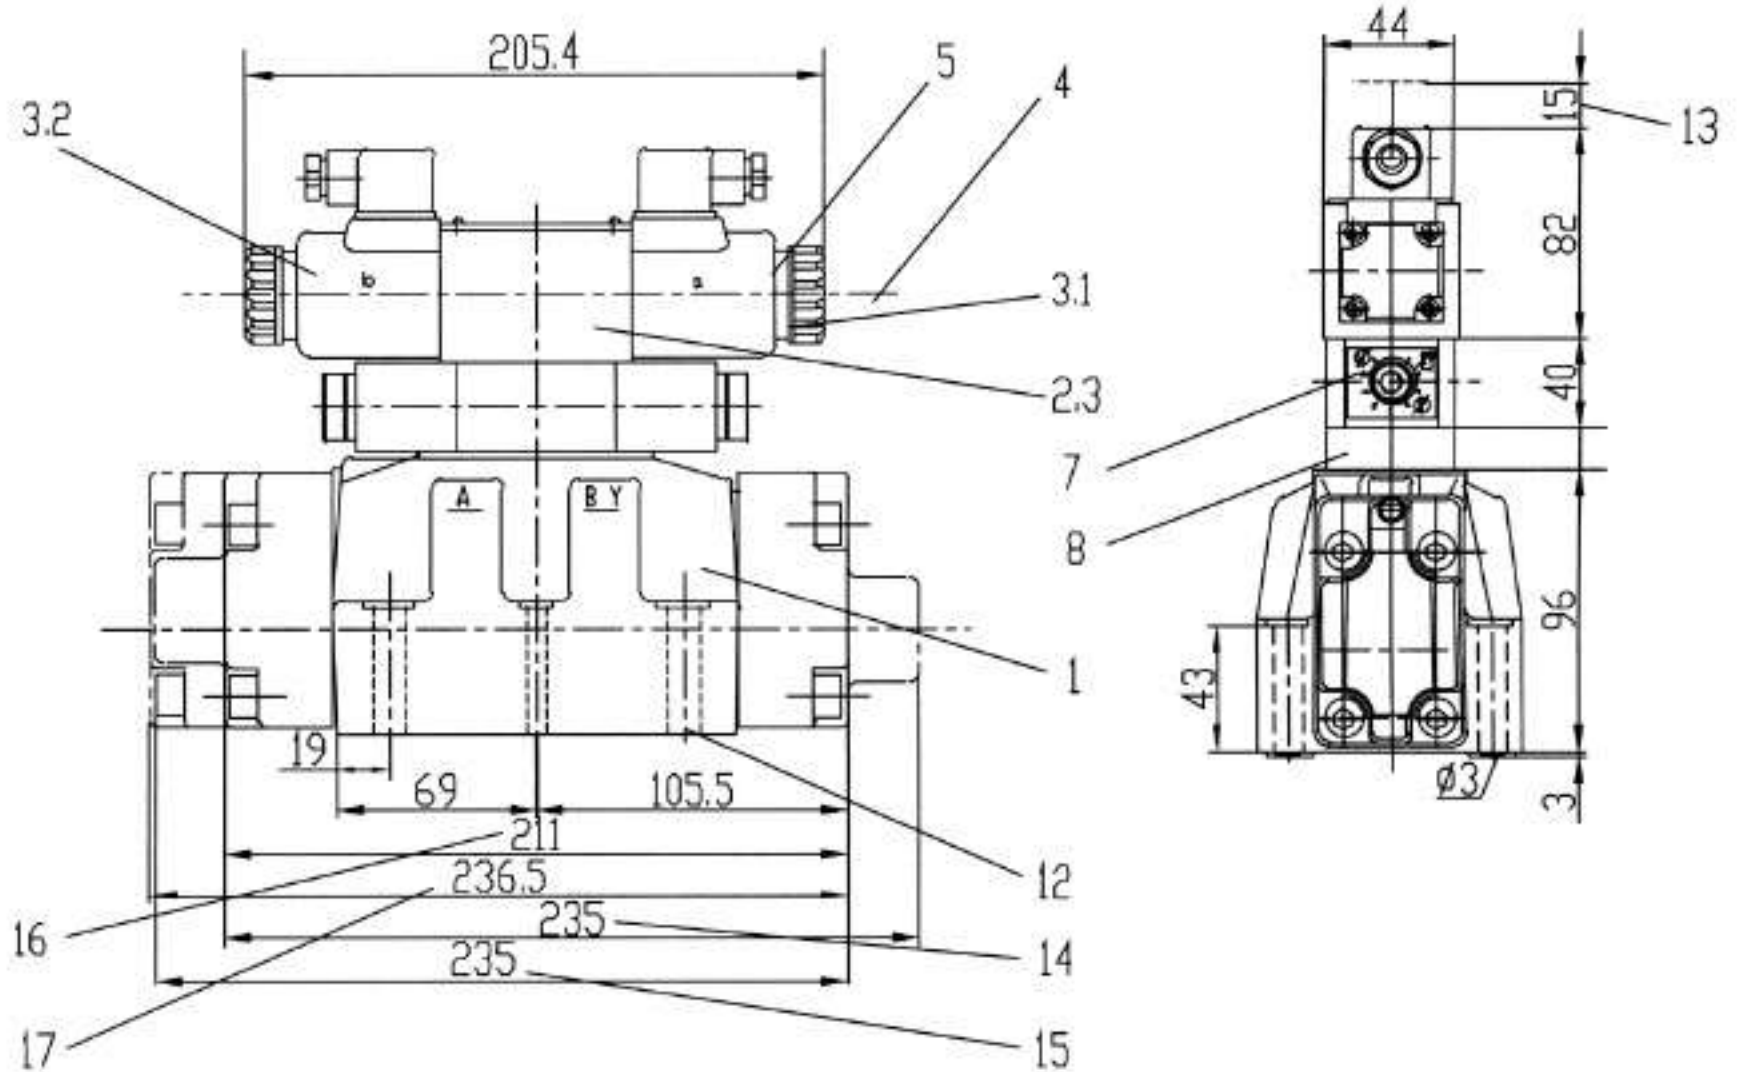

Dimension of ports' connective face is same as style:WEH16...50/

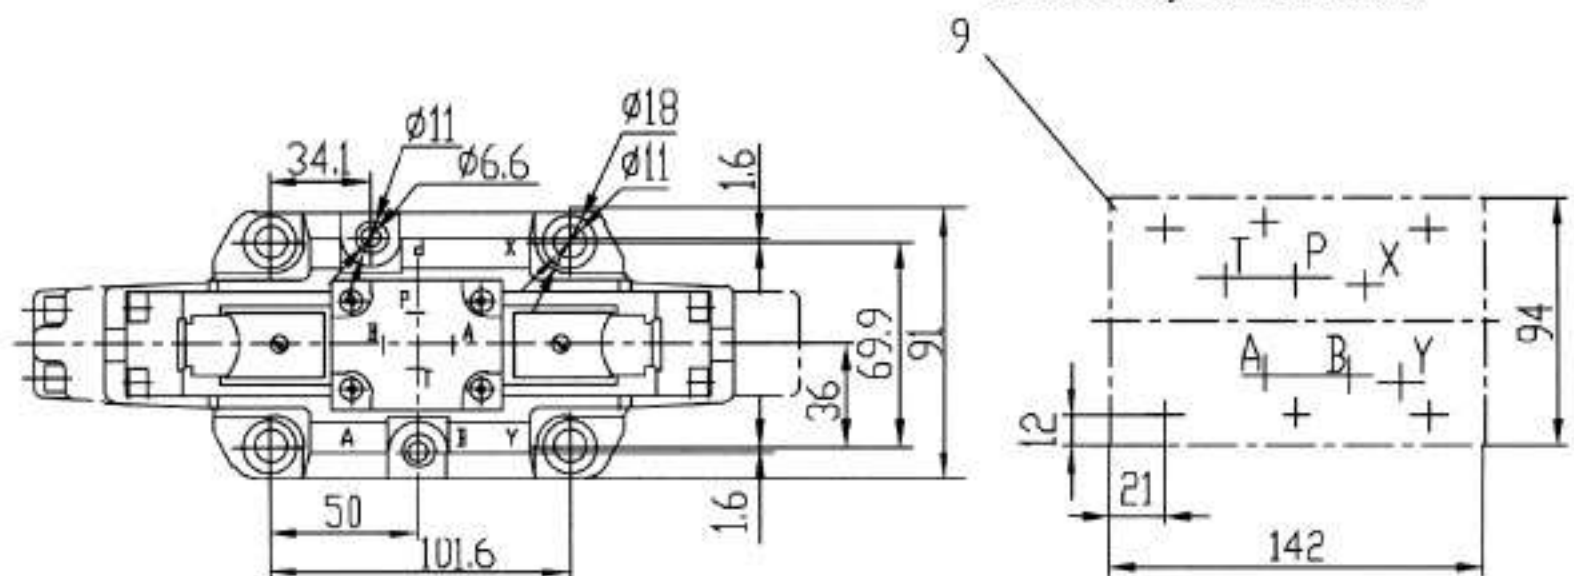

Subplates

G 172/01 (G 3/4"), G 172/02 (M27 x 2),
G 174/01 (G 1"), G 174/02 (M33 x 2), G 174/08 (flange)

Valve fixing screws

4 - M10 x 60-10.9 (GB/T70.1-2000)


$M_A = 75 \text{ Nm}$

2 - M6 x 60-10.9 (GB/T70.1-2000)



$M_A = 15.5 \text{ Nm}$

must be ordered separately.



For items list, see page 207,208.

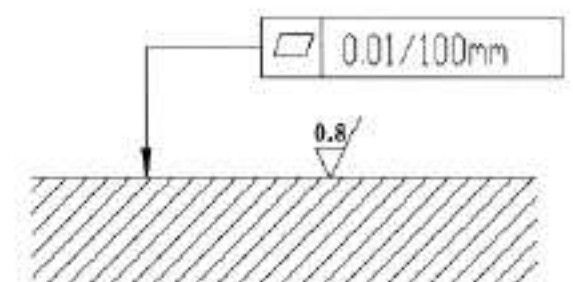

Required surface finish of the mating piece

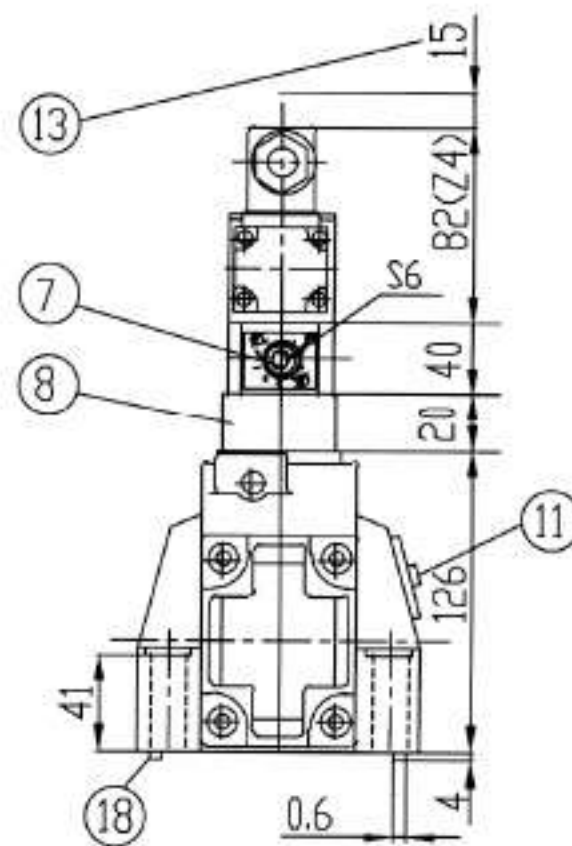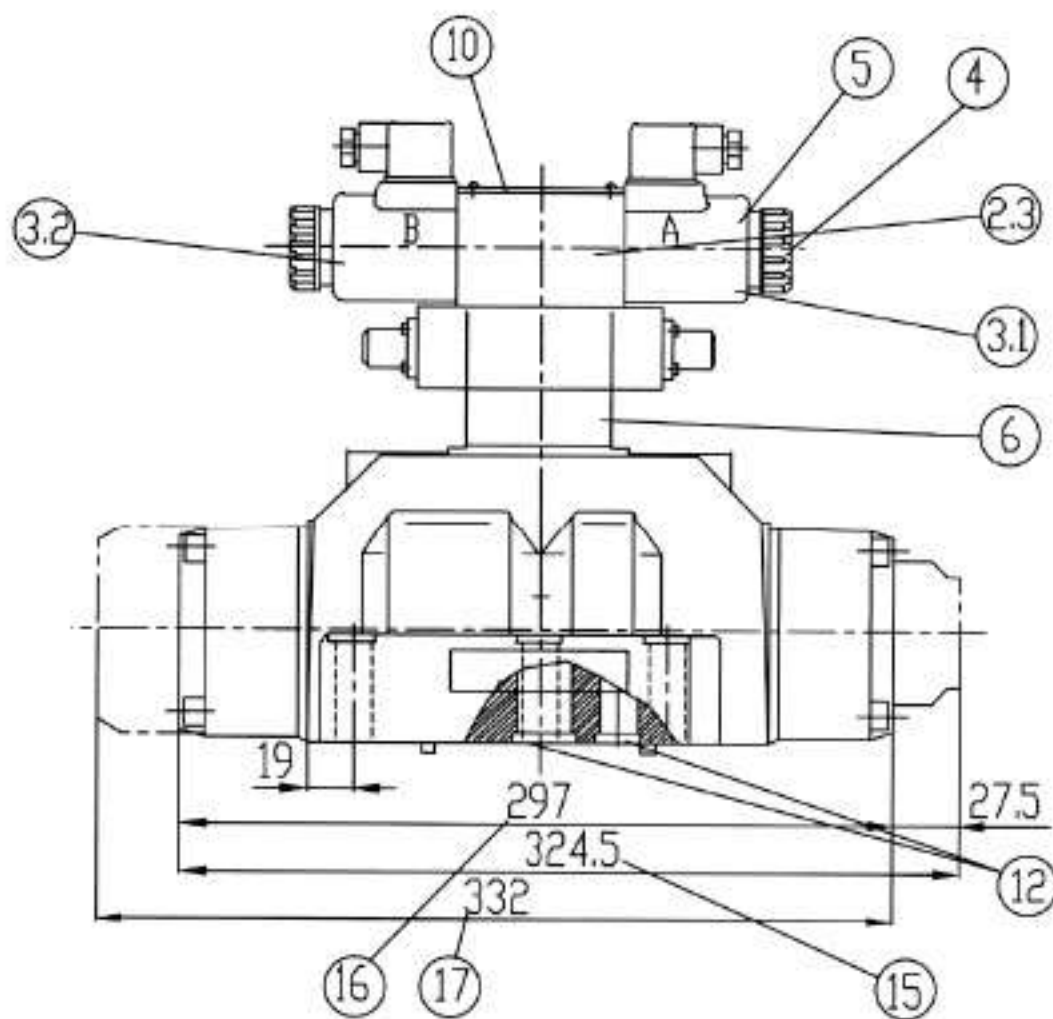

dimension of ports connective flate is the same as style:WEH25...50/

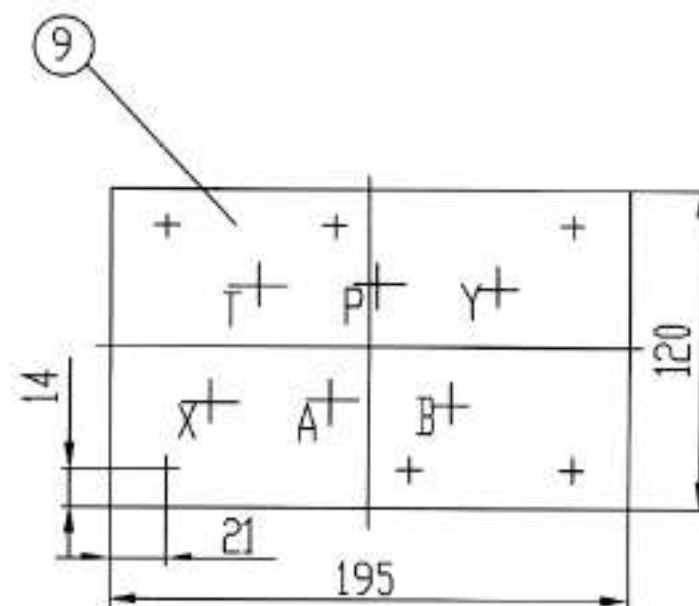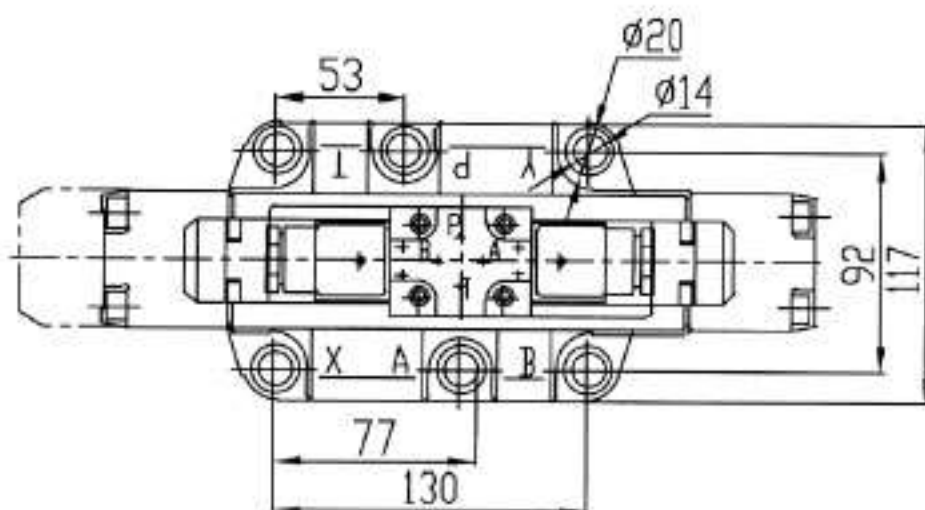

Subplates


- G 151/01 (G 1"),
- G 153/01 (G 1"), for valves with pressure-centred neutral position
- G 154/01 (G 1 1/4"), G 154/08 (flange)
- G 156/01 (G 1 1/2")

Valve fixing screws


- 6 - M12 x 60 -10.9 (GB/T70.1-2000)
- $M_A = 130 \text{ Nm}$

must be ordered separately.


For items list, see page 209,210.

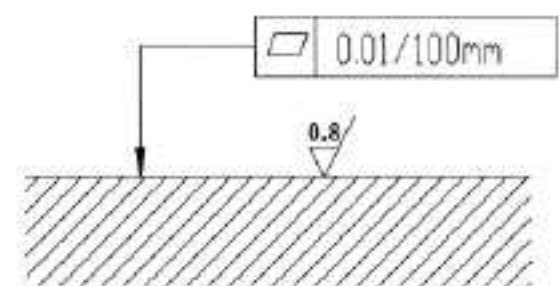

Required surface finish of the mating piece

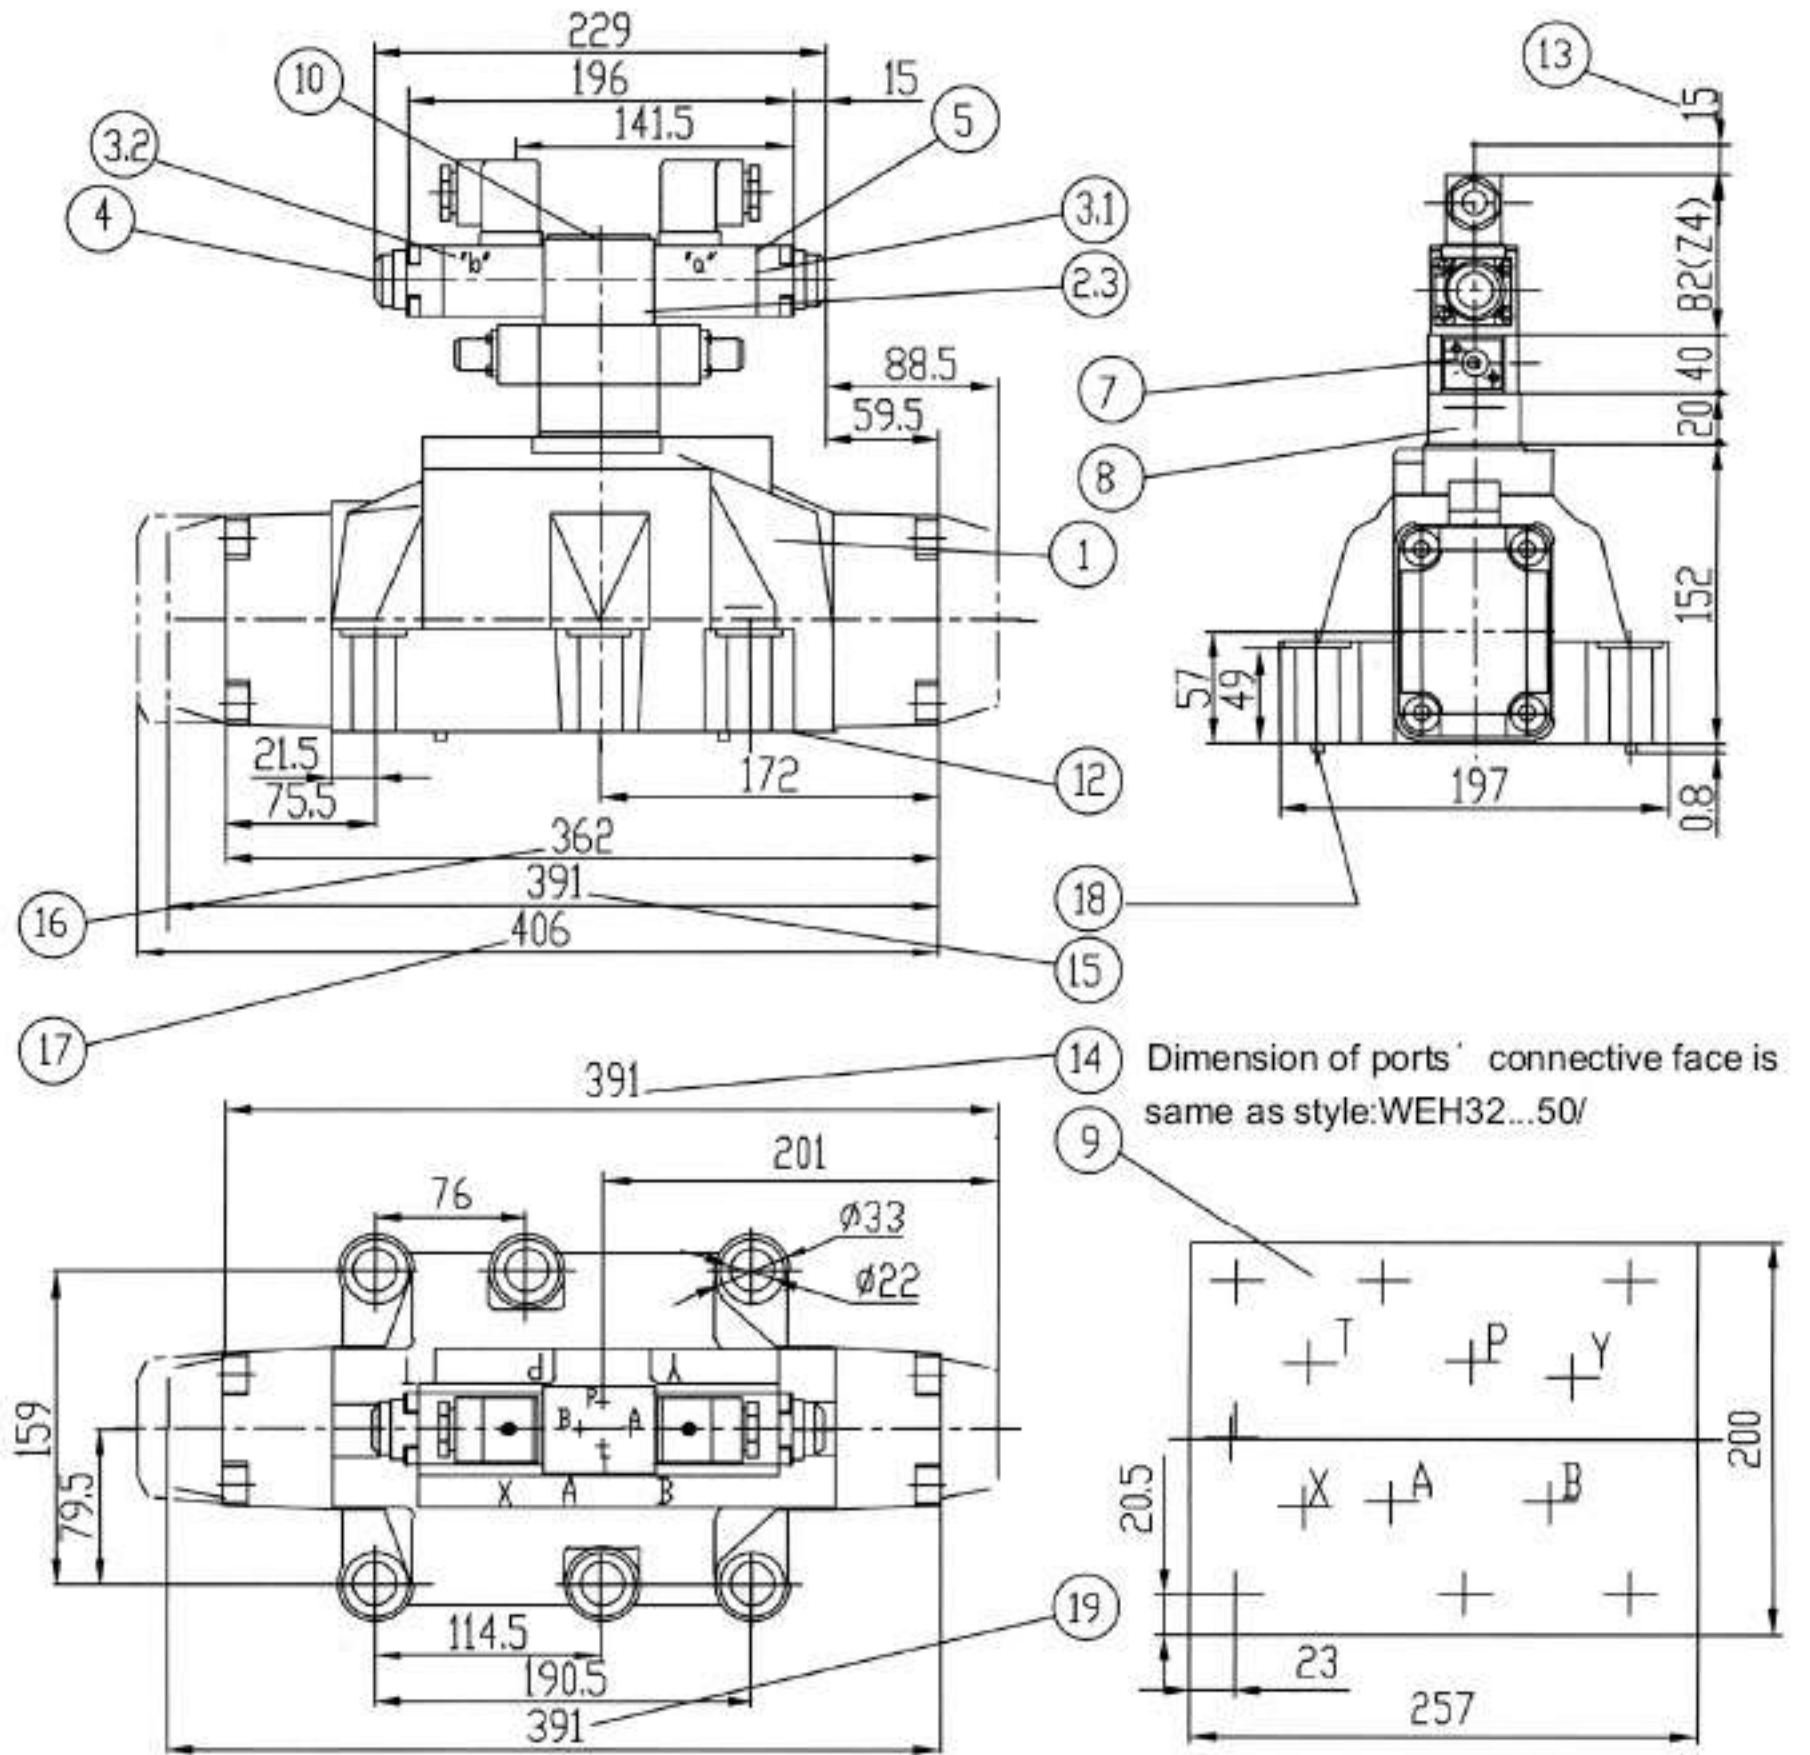

Subplates
 G 157/01 (G 1 1/2"),
 G 157/02 (M48 x 2),
 G 158/10 (flange)
 Valve fixing screws
 6 - M20 x 80-10.9 (GB/T70.1-2000)
 $M_A = 430 \text{ Nm}$
 must be ordered separately.
 For items list, see page 210,211

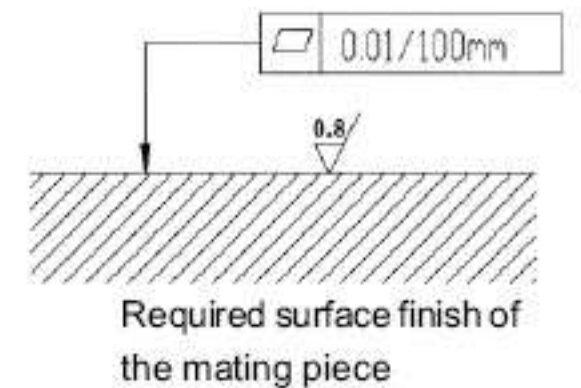


List of items :


- | | |
|--|--|
| <p>1 Main valve</p> <p>2 Pilot valve type 4WE 6 ...</p> <p>2.1 · Pilot valve type 4WE 6 D(1 solenoid) for main valves with spools C, D, K, Z
spools HC, HD, HK, HZ</p> <ul style="list-style-type: none"> · Pilot valve type 4WE 6 J...(1 solenoid "a") for main valves with spools EA, FA, etc., spring return · Pilot valve type 4WE 6 M...(1 solenoid "a") for main valves with spools HEA, HFA, etc., hydraulic spool return <p>2.2 · Pilot valve type 4WE 6 Y...(1 solenoid) for main valves with spool Y spool HY</p> <ul style="list-style-type: none"> · Pilot valve type 4WE 6 J...(1 solenoid "b") for main valves with spools EB, FB, etc.,spring return · Pilot valve type 4WE 6 M...(1 solenoid "b") for main valves with spools HEB, HFB, etc., hydraulic spool return <p>2.3 · Pilot valve type 4WE 6 J...(2 solenoids) for main valves with 3 positions, spring-centred</p> <ul style="list-style-type: none"> · Pilot valve type 4WE 6 M...(2 solenoids) for main valves with 3 positions, pressure-centred <p>3.1 Solenoid "a" (grey plug-in connector)</p> <p>3.2 Solenoid "b" (black plug-in connector)</p> <p>4 Manual override "N", optional</p> <p>- The manual override can only be operated up to a tank pressure of up to approx. 5MPa.
Take care not to damage the manual override bore!</p> <p>5 Solenoid without manual override</p> <p>6 Height of the connector plate for hydraulic operation (type 4WH...)</p> <p>7 Shifting time adjustment (A/F 6), optional</p> <p>8 Pressure reducing valve, optional</p> | <p>9 Machined valve mounting surface, position of ports</p> <p>10 Nameplate for the pilot valve</p> <p>11 Nameplate for the entire valve</p> <p>12 O-rings</p> <p>13 Space required to remove the plug-in connector</p> <p>14 2-position valves with spring offset in the main valve (C, D, K, Z)</p> <p>15 2-position valves with spring offset in the main valve (Y)</p> <p>16 3-position valves, spring-centred;
2-position valves with hydraulic offset in the main valve</p> <p>17 3-position valves, pressure-centred</p> <p>18 Locating pin</p> |
|--|--|

O-Ring used at the bottom of the housing:


Order no.	A, B, P, T	X, Y, L
10	12 × 2	10.82 × 1.78
16	22 × 2.5	10 × 2
25	27 × 3	19 × 3
32	42 × 2	12 × 2

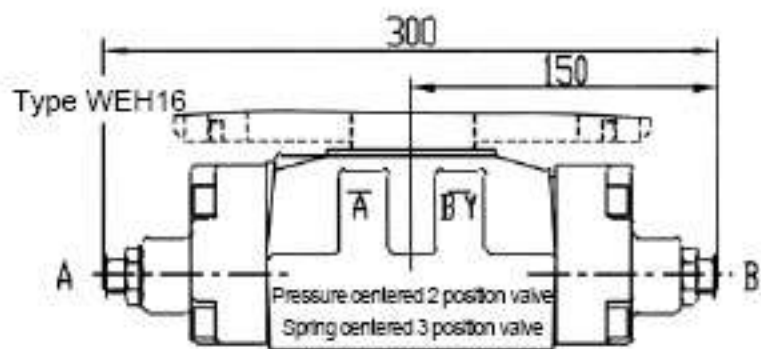


Stroke limiter on main valve sides A and B Stroke limiter on valve side A
Stroke limiter on valve side B

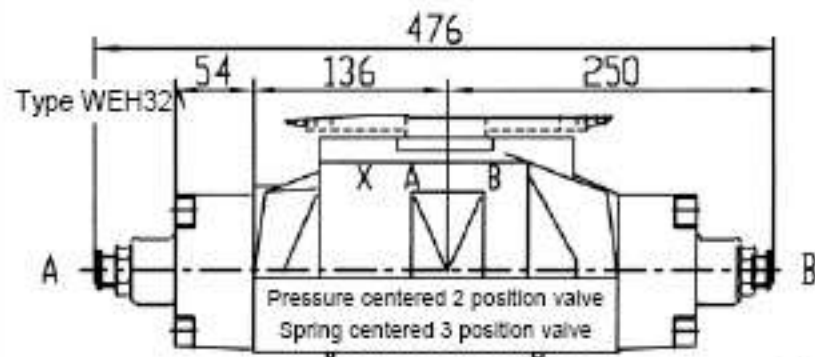


Stroke limiter on main valve sides A and B Stroke limiter on valve side A
Stroke limiter on valve side B

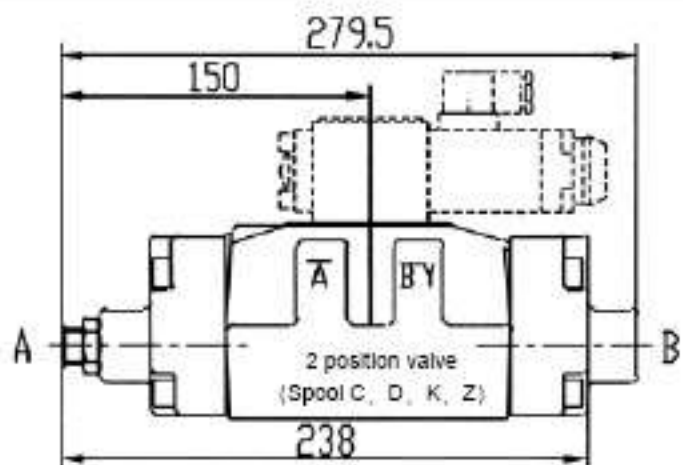


Stroke limiter on valve side A 11

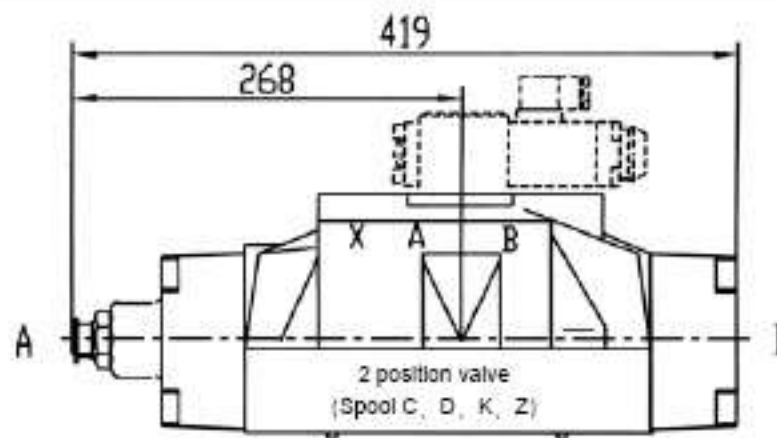


Stroke limiter on valve side A 11

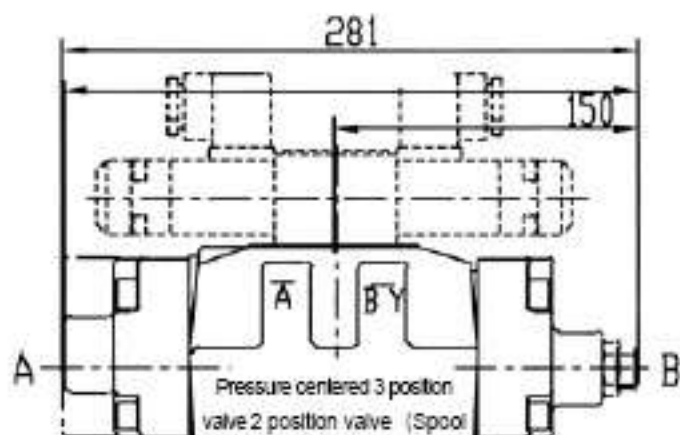


Stroke limiter on valve side B 12

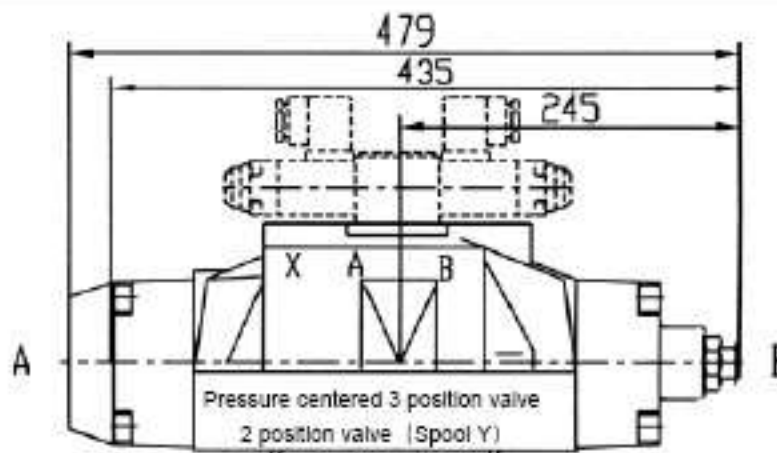


Stroke limiter on valve side B 12

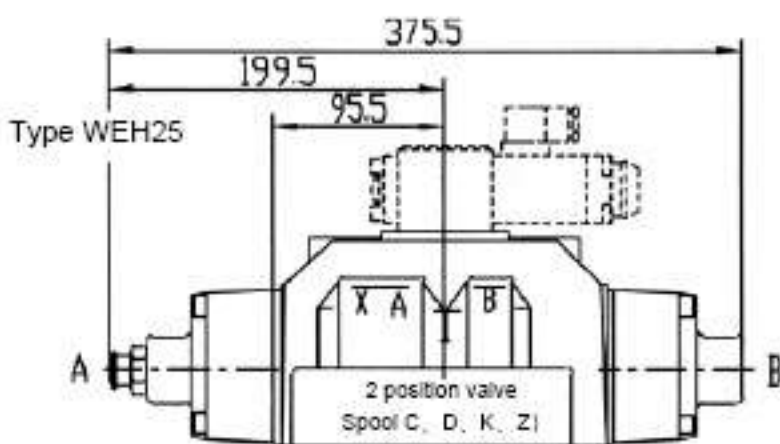

Stroke limiter on valve side A 11


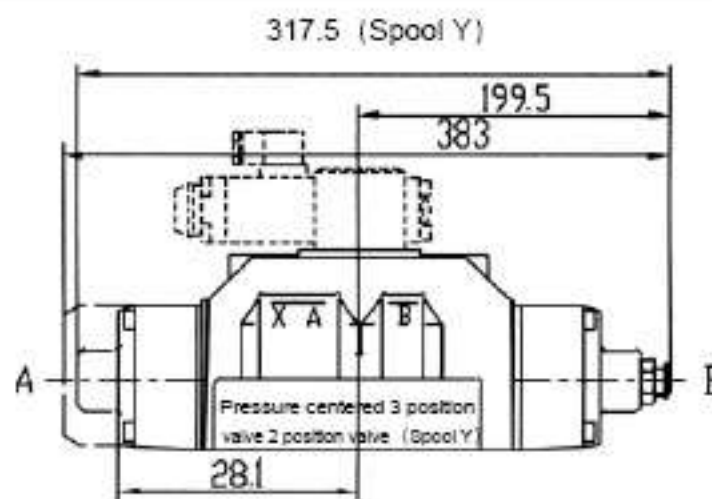


Stroke limiter on valve side B


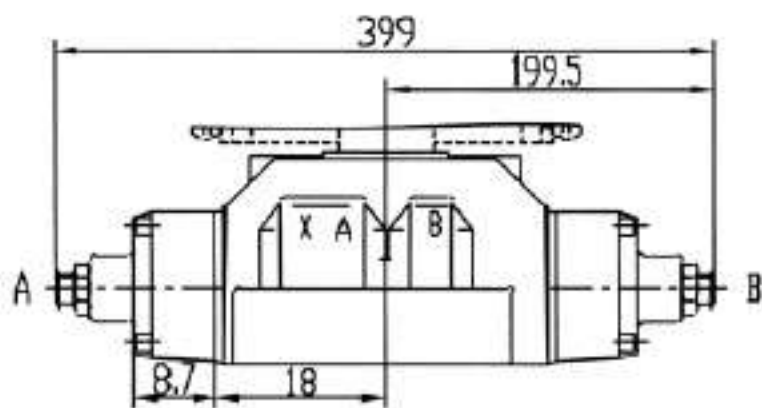


Stroke limiter on main valve sides A and B Stroke limiter on valve side A
Stroke limiter on valve side B



Subplates

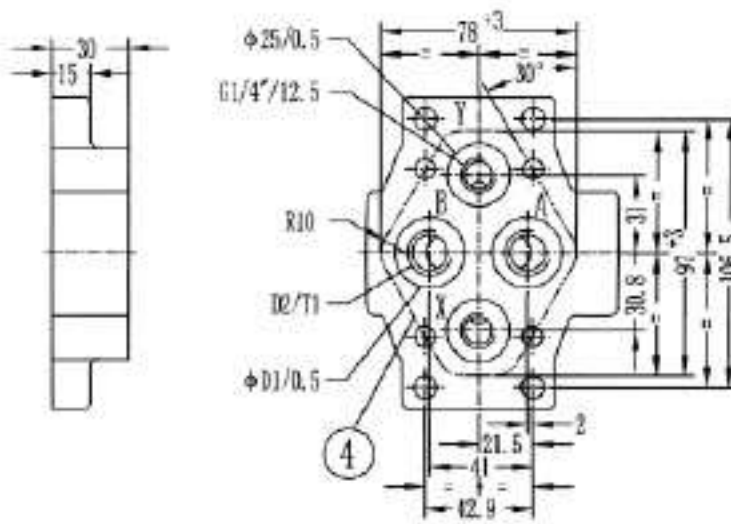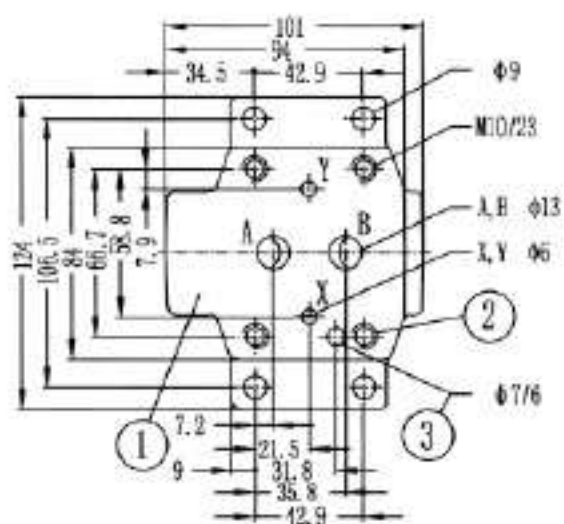

Size	Type	D1	D2	T1	Valve fixing screws	Tightening torque for screws	Weight
NG10	G460/01	28	G3/8"	13	4 - M10 × 40 -10.9 (GB/T70.1-2000)	69Nm	1.7kg
	G460/02		M18 × 1.5				
	G461/01	34	G1/2"	16			
	G461/02		M22 × 1.5				

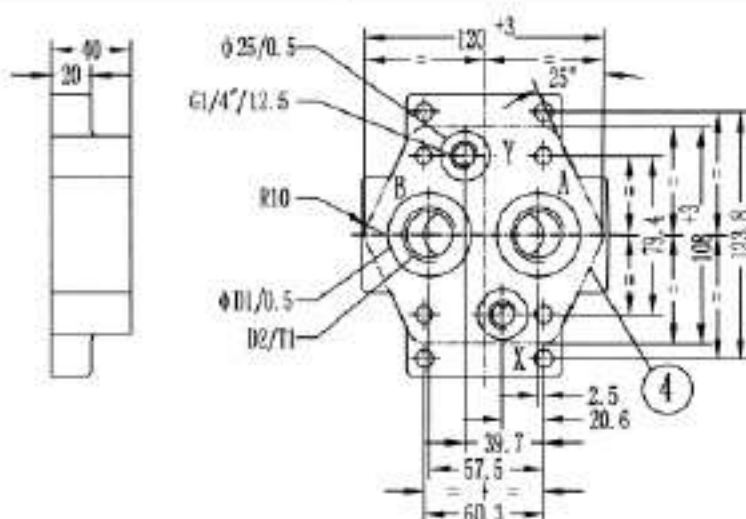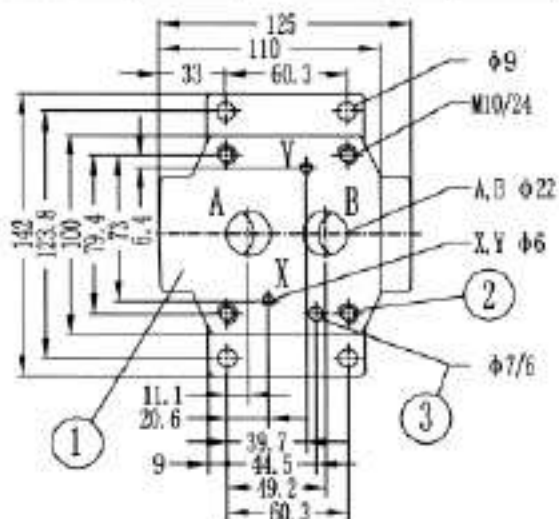

Size	Type	D1	D2	T1	Valve fixing screws	Tightening torque for screws	Weight
NG25	G412/01	42	G3/4"	17	4 - M10 × 50 -10.9 (GB/T70.1-2000)	69Nm	3.3kg
	G412/02		M27 × 2				
	G413/01	47	G1"	20			
	G413/02		M33 × 2				

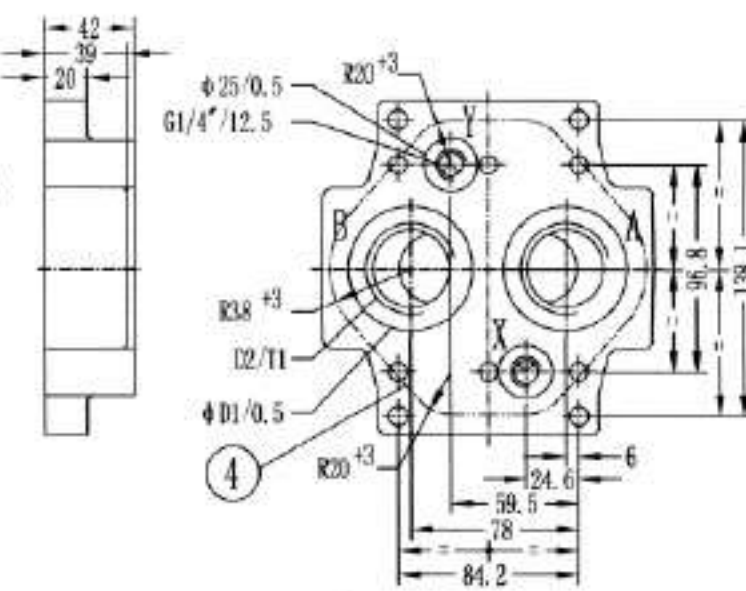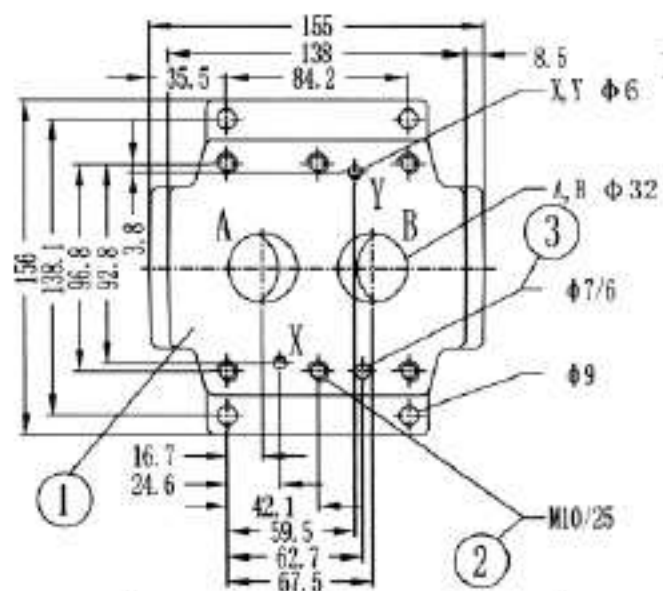



Size	Type	D1	D2	T1	Valve fixing screws	Tightening torque for screws	Weight
NG32	G414/01	56	G1 1/4"	20.5	6 - M10 × 60 -10.9 (GB/T70.1-2000)	69Nm	5kg
	G414/02		M42 × 2				
	G415/01	61	G1 1/2"	22.5			
	G415/02		M48 × 2				

1 mating piece of valve 2 Valve fixing screws 3 locating pin 4 Front panel cut-out

Subplates

G341/01 (G1/4") G341/02 (M14x1.5) Weight ≈ 0.6kg



(Dimensions in mm)

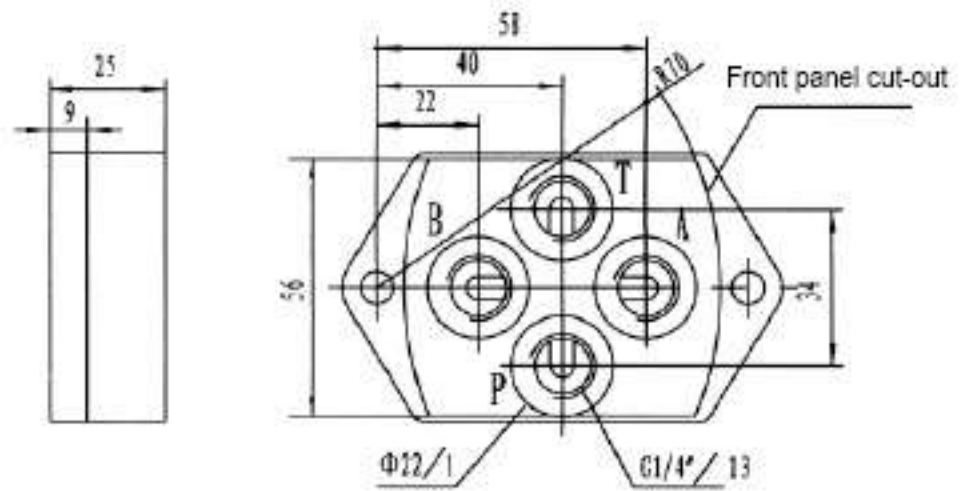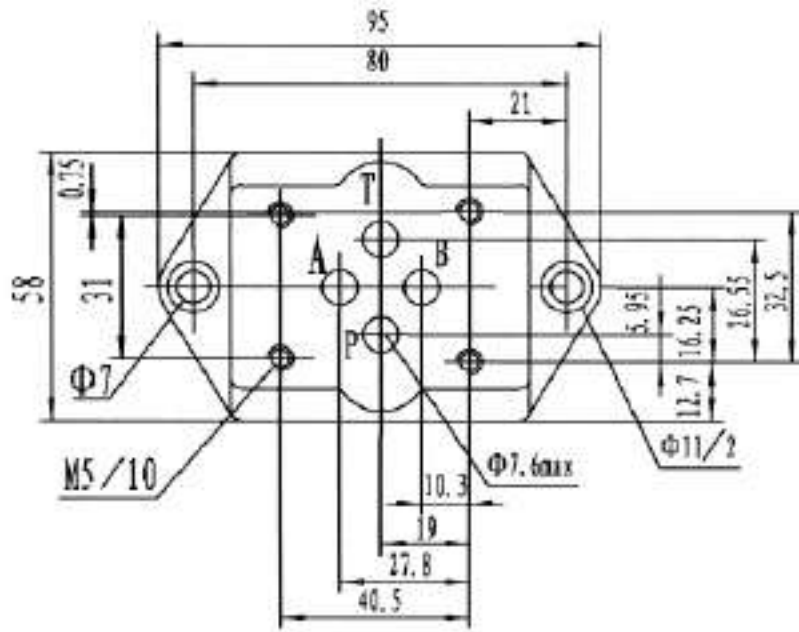

Valve fixing screws, M5 x 50 -10.9 (GB/T70.1-2000),
 $M_A = 9 \text{ Nm}$

G342/01 (G3/8") G342/02 (M18x1.5) Weight ≈ 1.1kg



(Dimensions in mm)

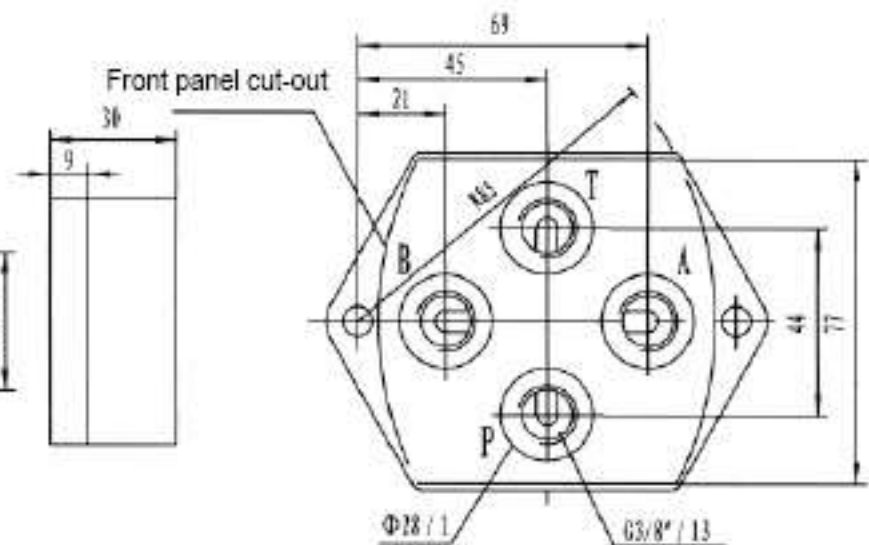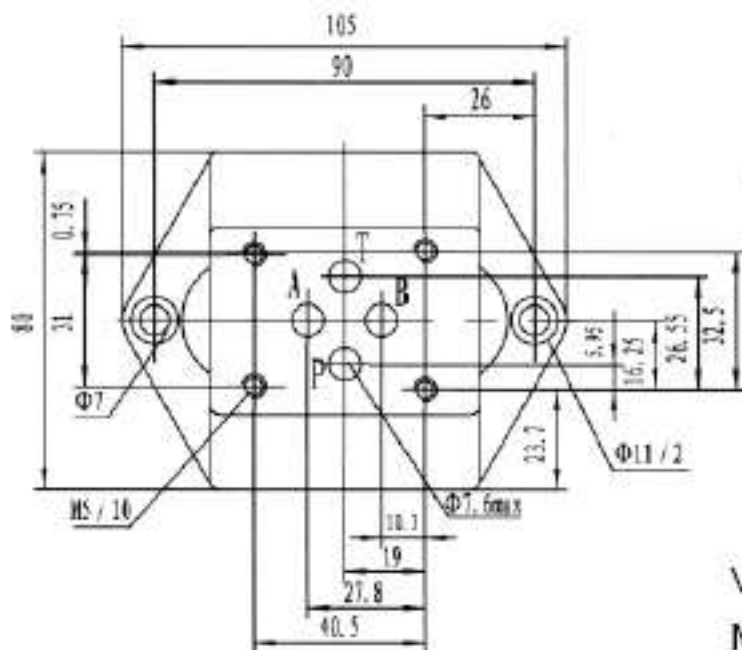

Valve fixing screws, M5 x 50 -10.9 (GB/T70.1-2000),
 $M_A = 9 \text{ Nm}$

G502/01 (G1/2") G502/02 (M22x1.5) Weight ≈ 1.9kg

(Dimensions in mm)

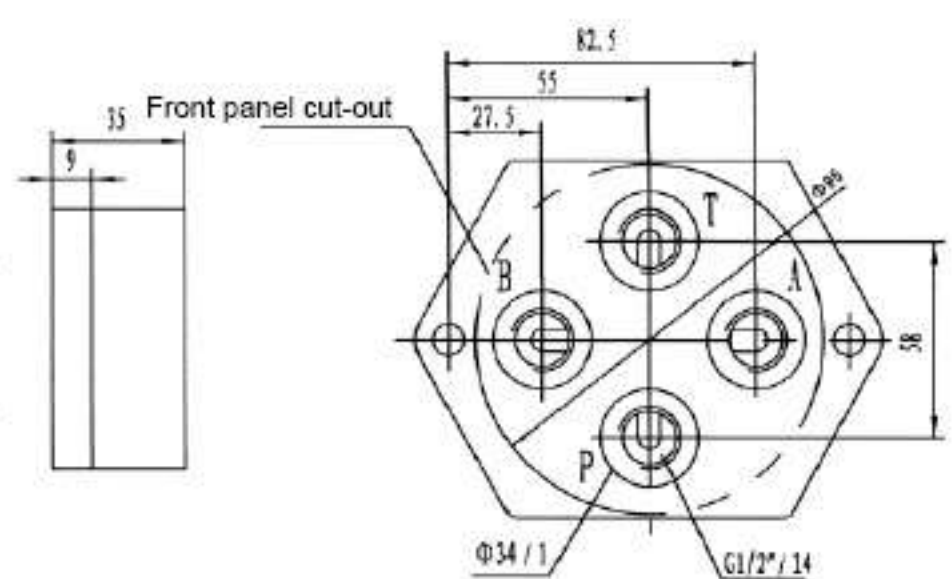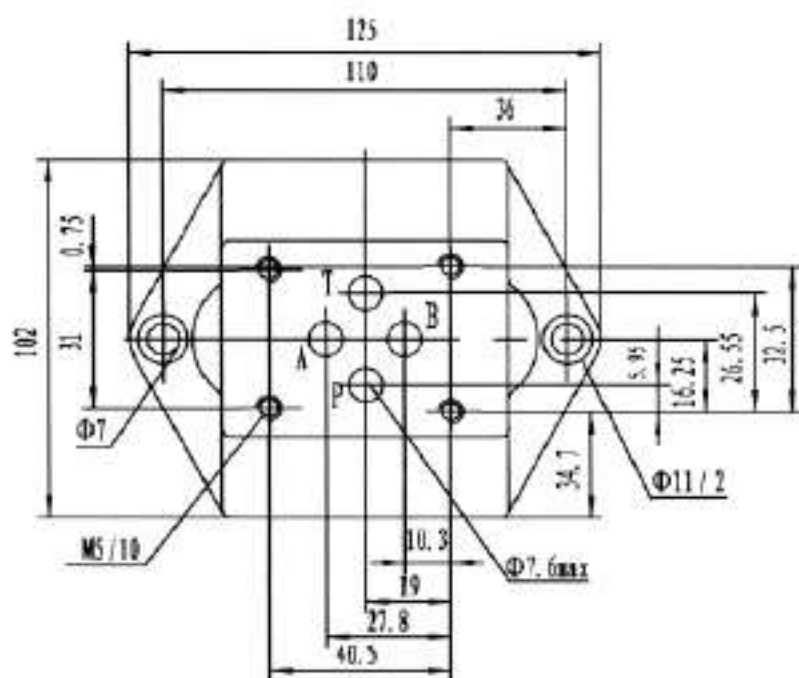


Valve fixing screws, M5 x 50 -10.9 (GB/T70.1-2000),
 $M_A = 9 \text{ Nm}$

Subplates

G66/01 G66/02 G67/01 G67/02


(Dimensions in mm)

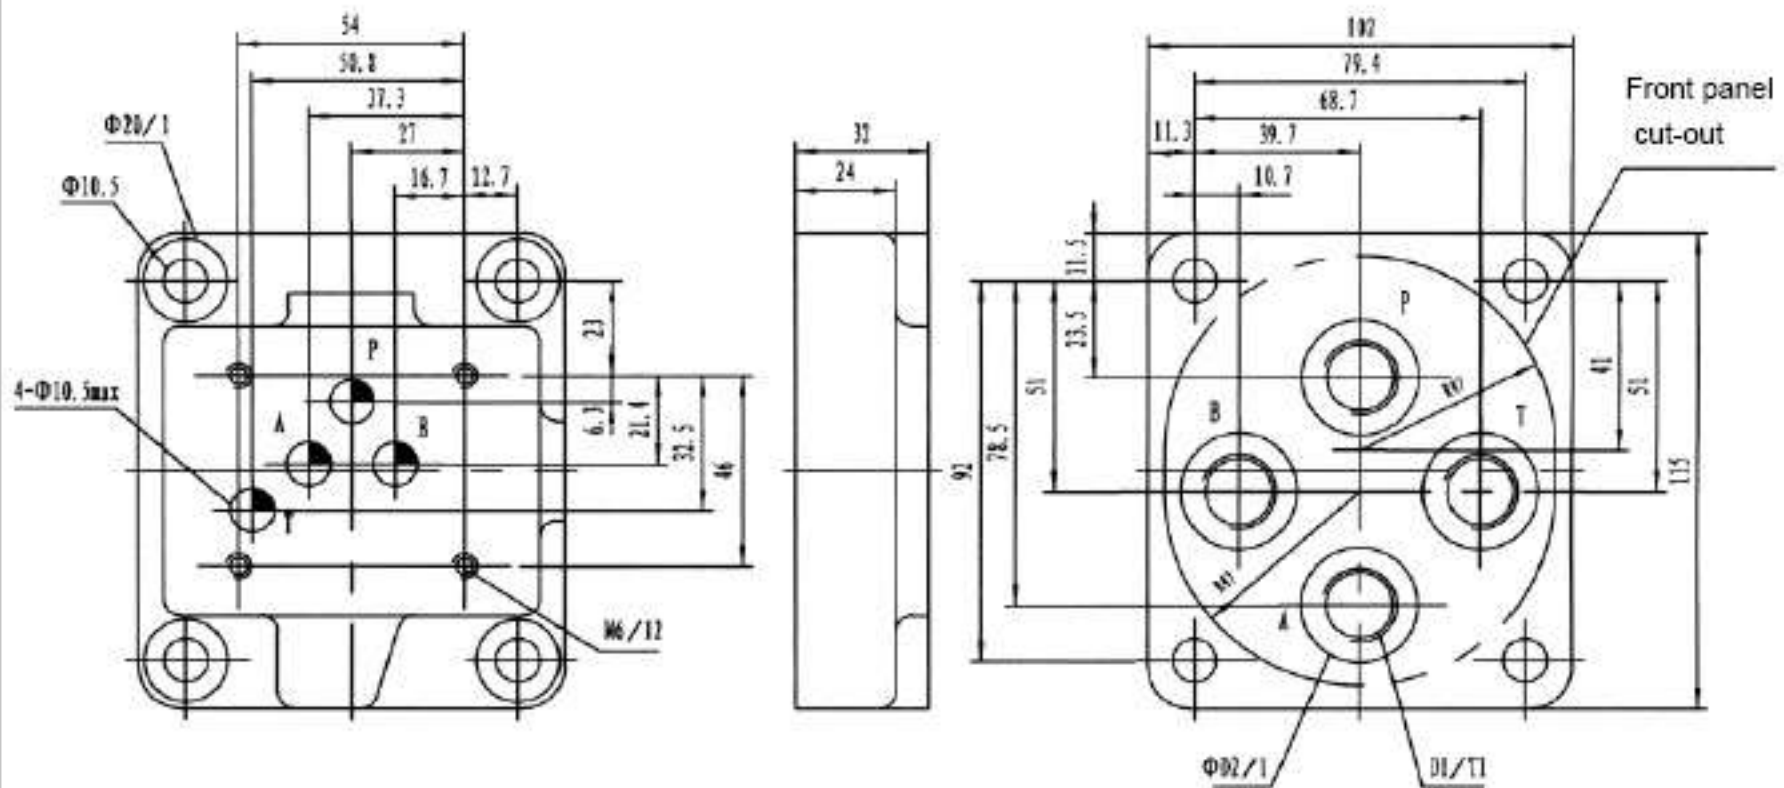

Type	D1	T1	Φ D2	Weight	Valve fixing screws	Tightening torque for screws
G66/01	G3/8"	12	28	approx.	4 - M6 × 50 -10.9 (GB/T70.1-2000), Should be ordered separately.	15N.m
G66/02	M18x1.5					
G67/01	G1/2"	14	34	2.3Kg		
G67/02	M22x1.5					

G534/01 G534/02

(Dimensions in mm)

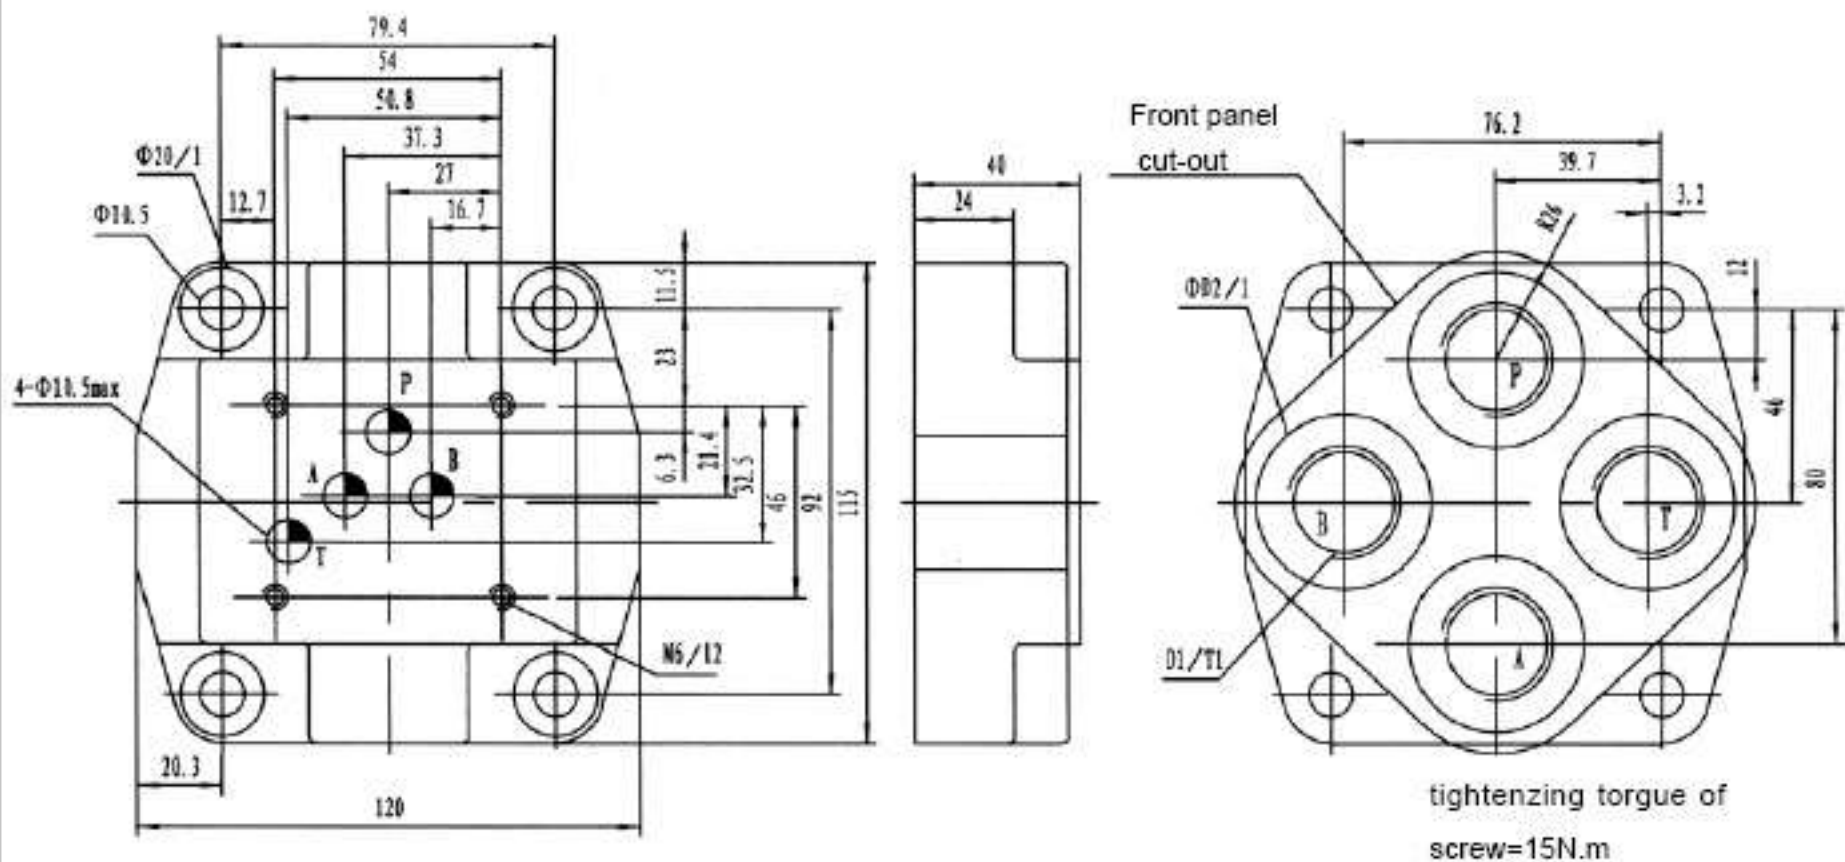


Type	D1	T1	Φ D2	Weight	Valve fixing screws	Tightening torque for screws
G534/01	G3/4"	17	42	approx. 2.5Kg	4 - M6 × 50-10.9 (GB/T70.1-2000), Should be ordered separately.	15N.m
G534/02	M27x2					

Subplates

G535/01 G535/02 G536/01 G536/02


(Dimensions in mm)

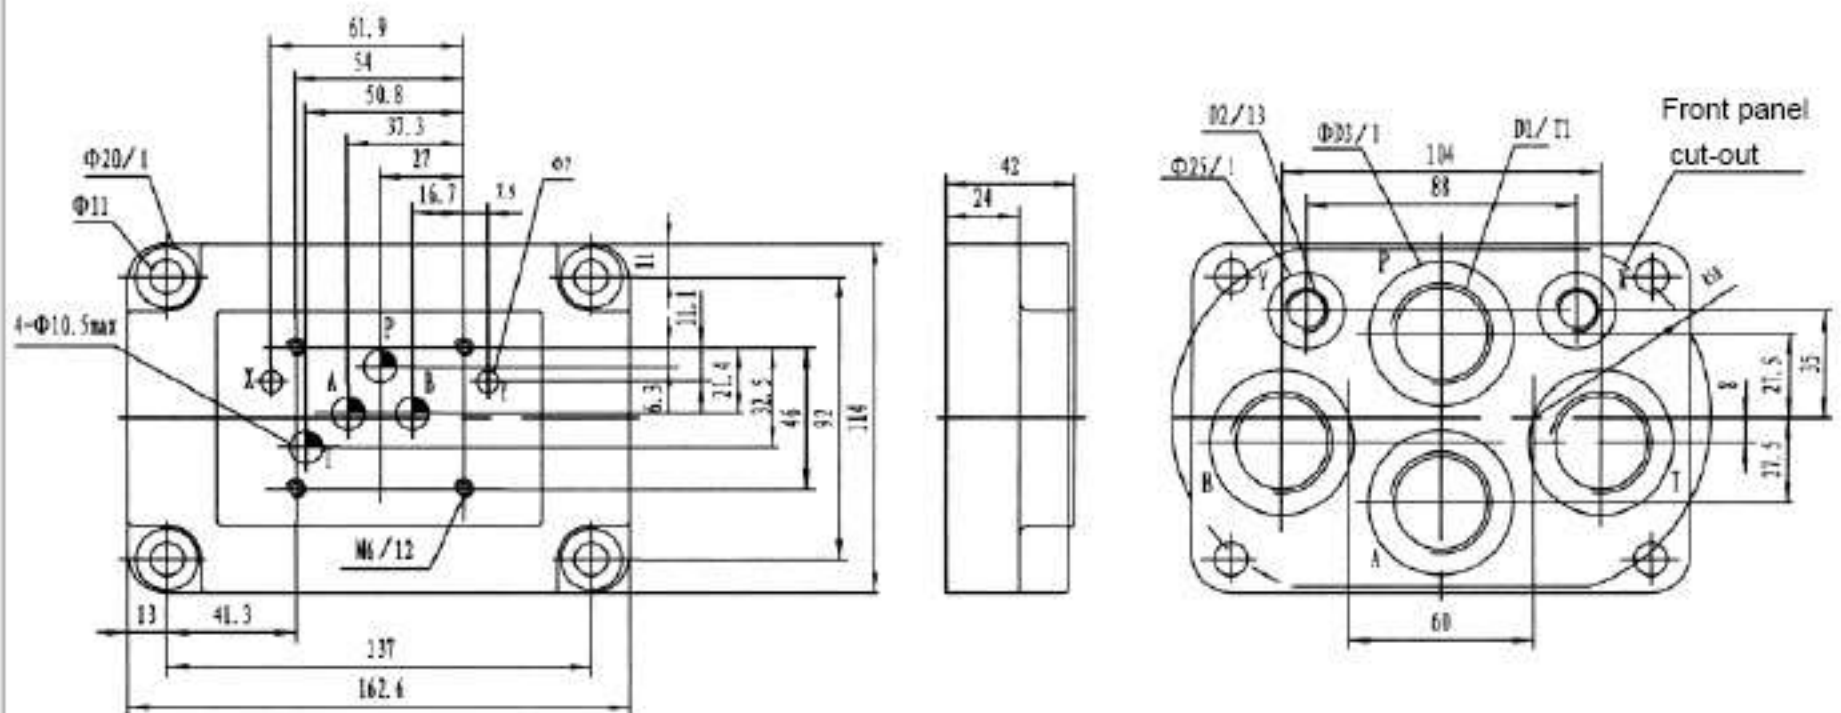

Type	D1	T1	D2	φ D3	Weight	Valve fixing screws	Tightening torque for screws
G535/01	G3/4"	16	G1/4"	42	approx. 3.6Kg	4 - M6 × 45 -10.9 (GB/T70.1-2000) Should be ordered seperately.	15N.m
G535/02	M27x2		M14x1.5				
G536/01	G1"	18	G1/4"	47			
G536/02	M33x2		M14x1.5				

G172/01 G172/02

(Dimensions in mm)

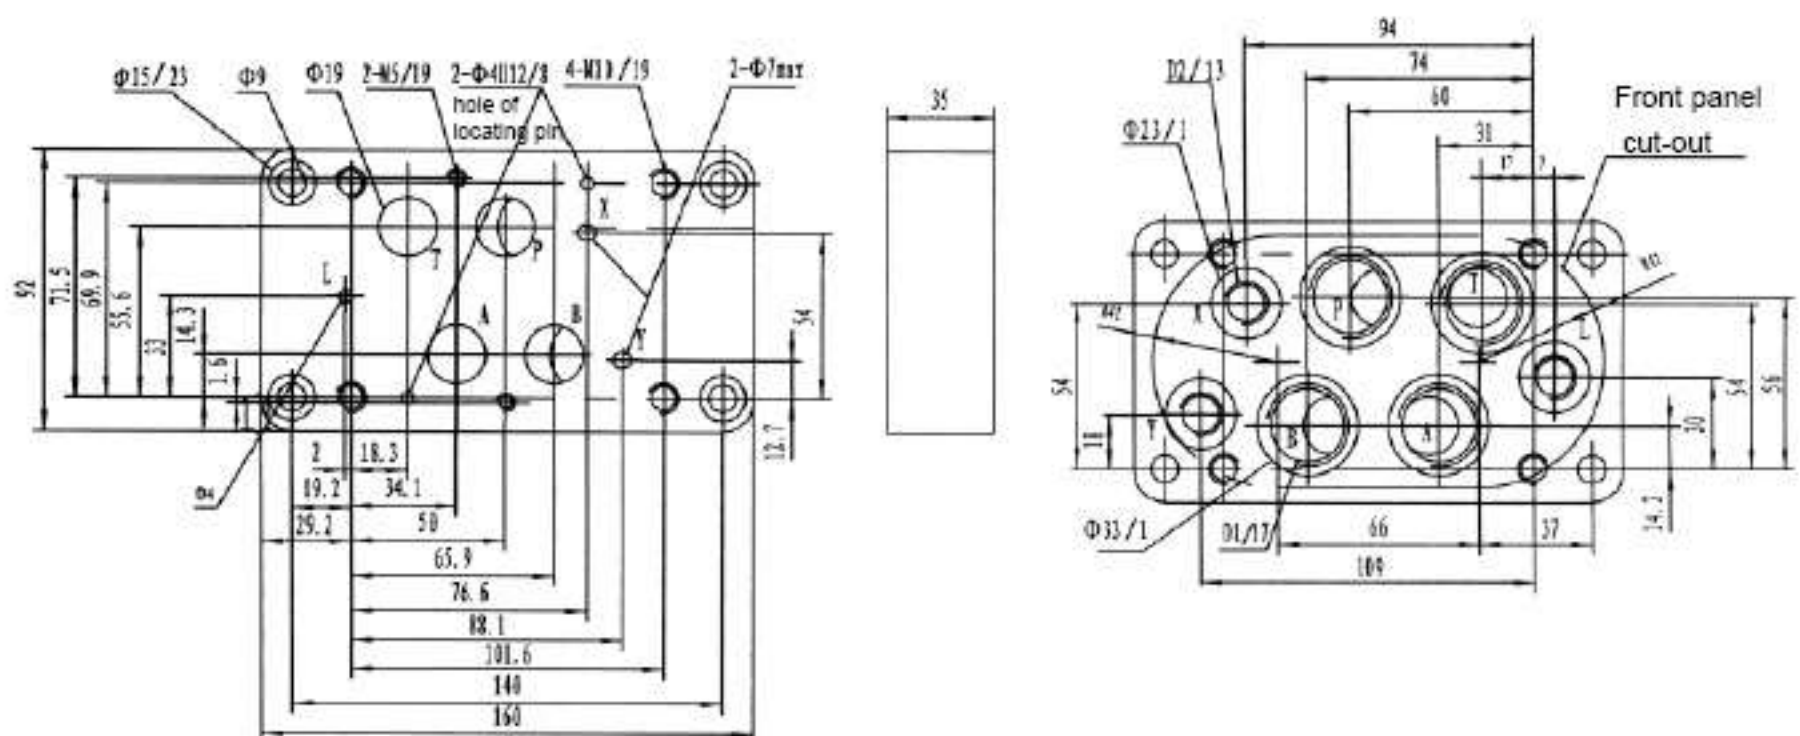


Type	D1	D2	Weight	Valve fixing screws	Tightening torque for screws
G172/01	G3/4"	G1/4"	approx.	4 - M10 × 60 -10.9 (GB/T70.1-2000), Should be ordered seperately.	62N.m
G172/02	M27x2	M14x1.5	2.8kg	2 - M6 × 60 -10.9 (GB/T70.1-2000), Should be ordered seperately.	12.5N.m

Subplates

G174/01 G174/02


(Dimensions in mm)

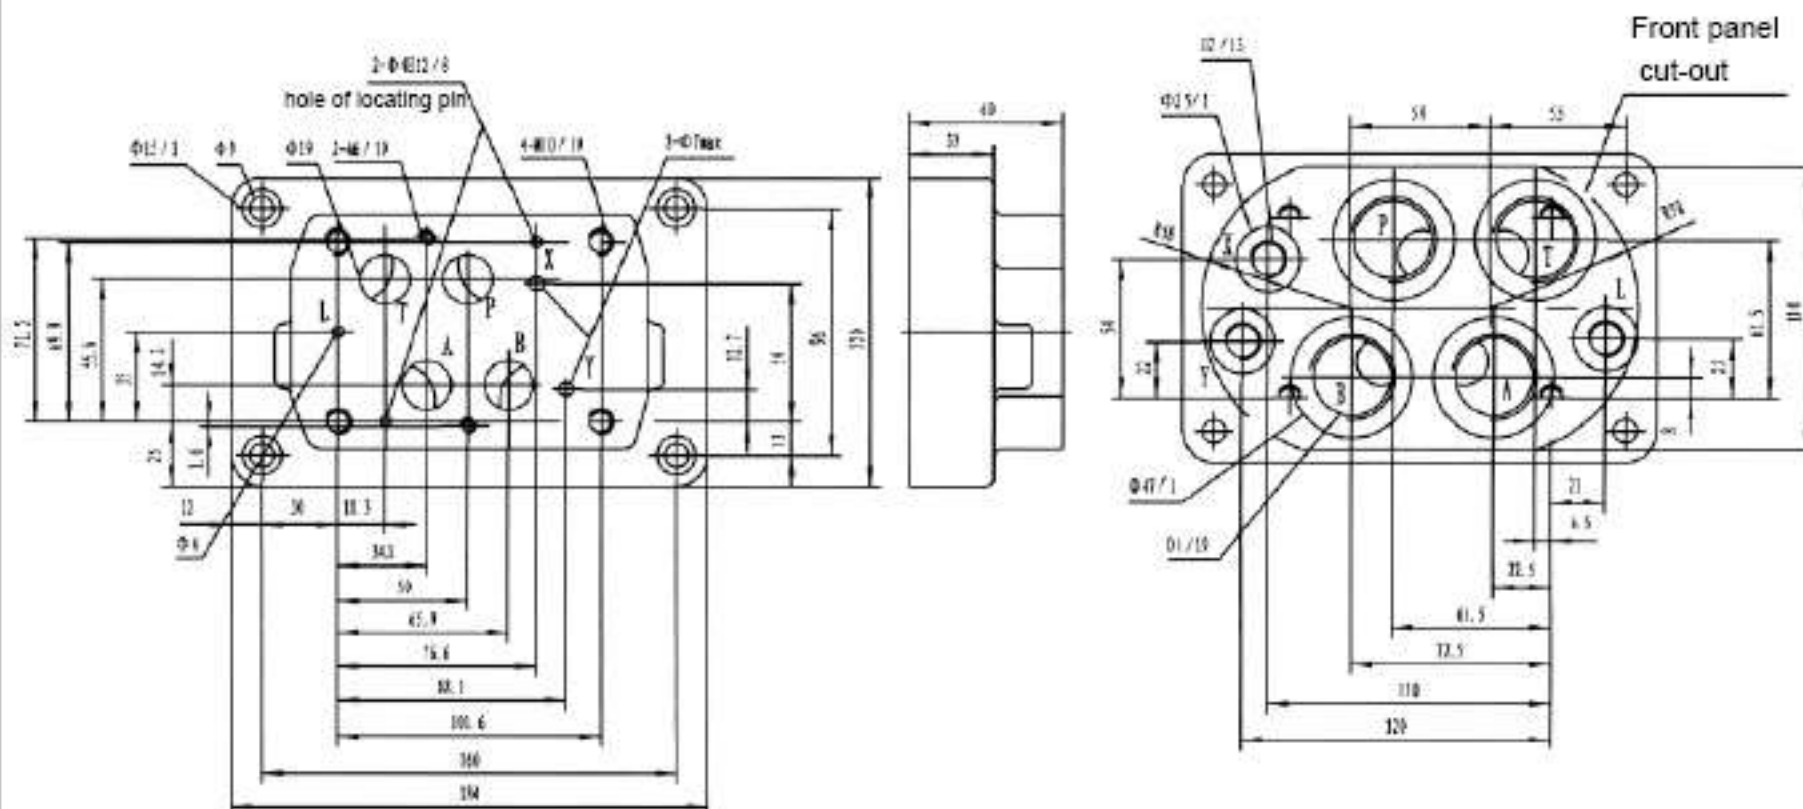

Type	D1	D2	Weight	Valve fixing screws	Tightening torque for screws
G174/01	G1"	G1/4"	approx.	4 - M10 × 60-10.9 (GB/T70.1-2000), Should be ordered seperately.	62N.m
G174/02	M33x2	M14x1.5	5.5kg	2 - M6 × 60-10.9 (GB/T70.1-2000), Should be ordered seperately.	12.5N.m

G174/08

(Dimensions in mm)

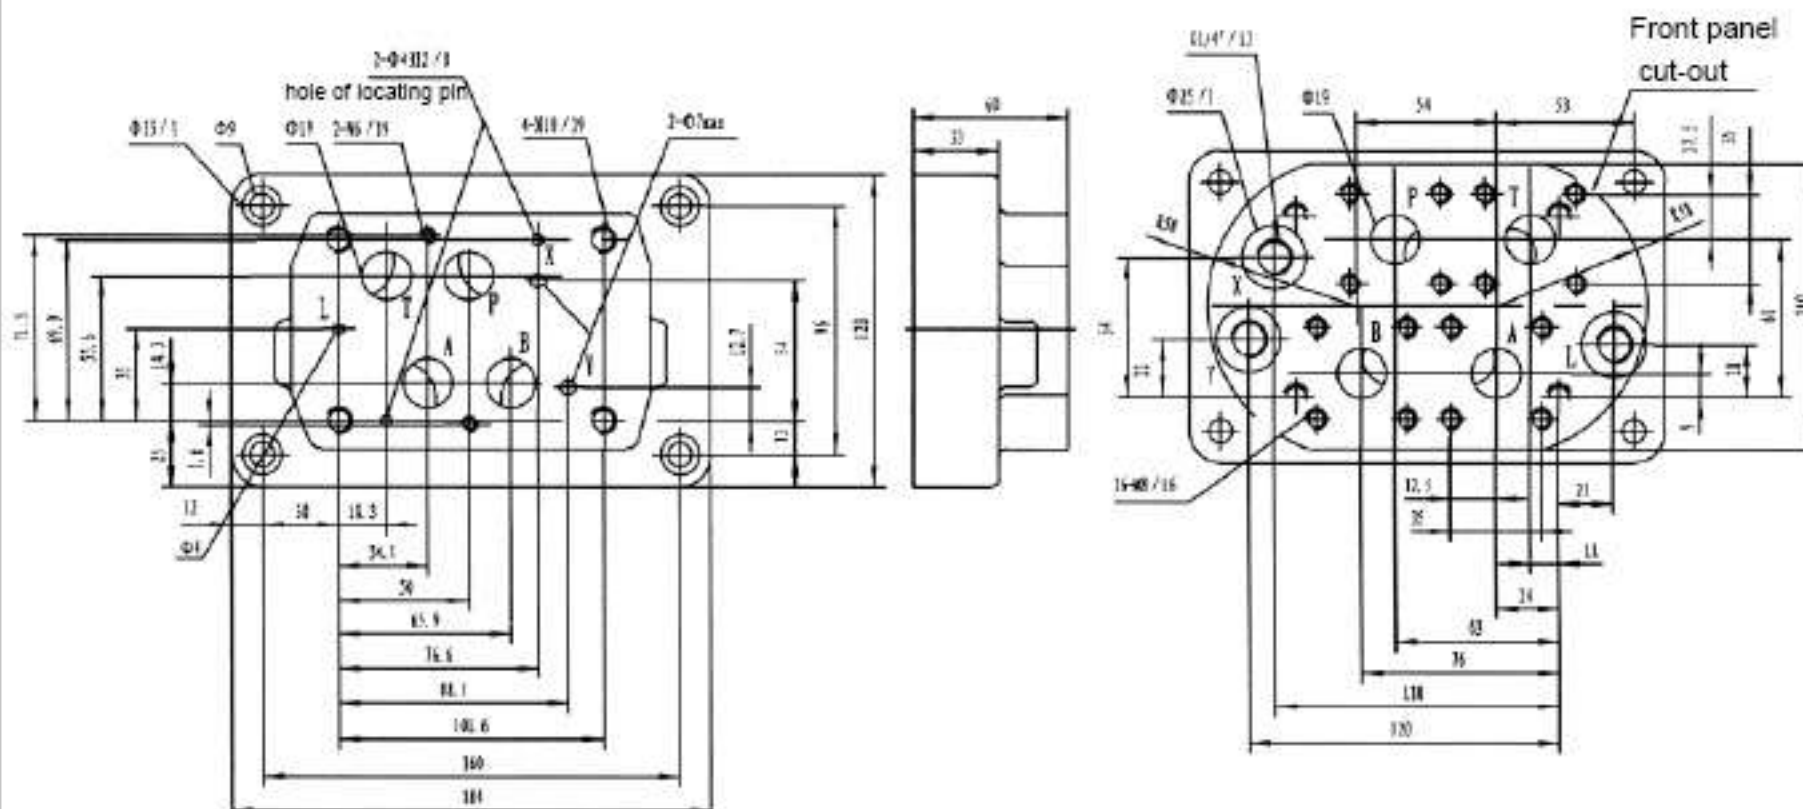


Type	Pressure	Type	Weight	Valve fixing screws	Tightening torque for screws
G174/08	25MPa	009 271	approx.	4 - M10 × 60-10.9 (GB/T70.1-2000), Should be ordered seperately.	62N.m
	40MPa	009 272	5.5kg	2 - M6 × 60-10.9 (GB/T70.1-2000), Should be ordered seperately.	12.5N.m

Subplates

G154/08 flange connection

(Dimensions in mm)

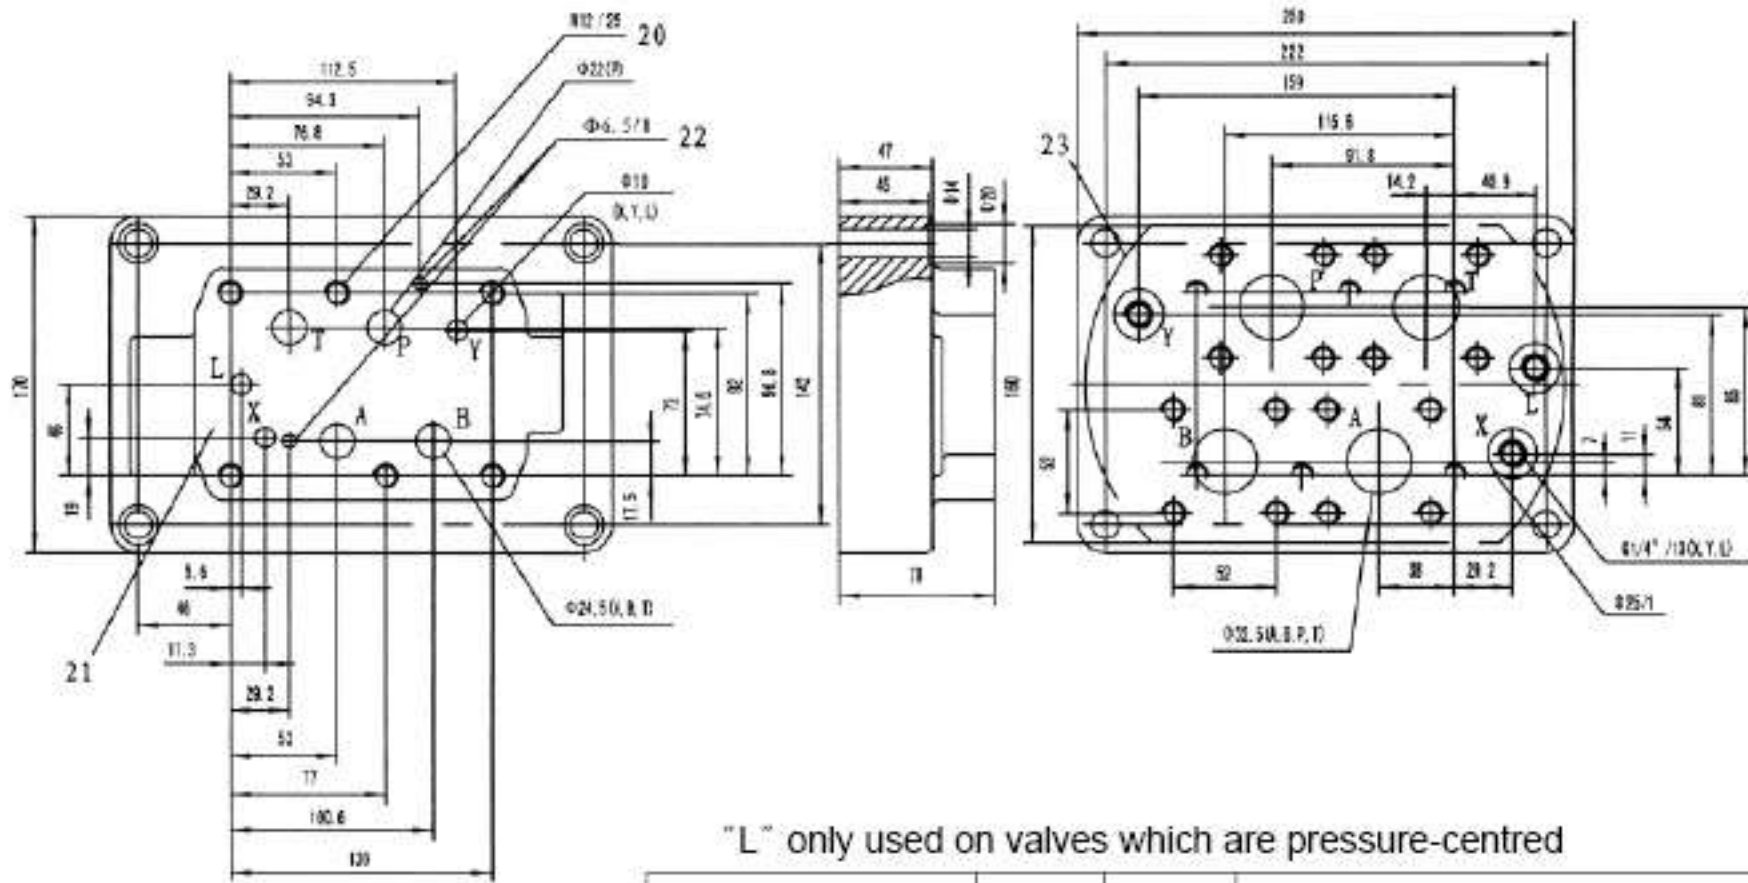


"L" only used on valves which are pressure-centred

	Type	Pressure	Valve fixing screws
flange conneting	009176	25MPa	6 - M12x60 -10.9 (GB/T70.1-2000),
	009177	40MPa	

20 Valve fixing screws 21 mating piece of valve 22 locating pin 23 Front panel cut-out

G157/01(G1 1/2");G157/02(M48 × 2)

(Dimensions in mm)

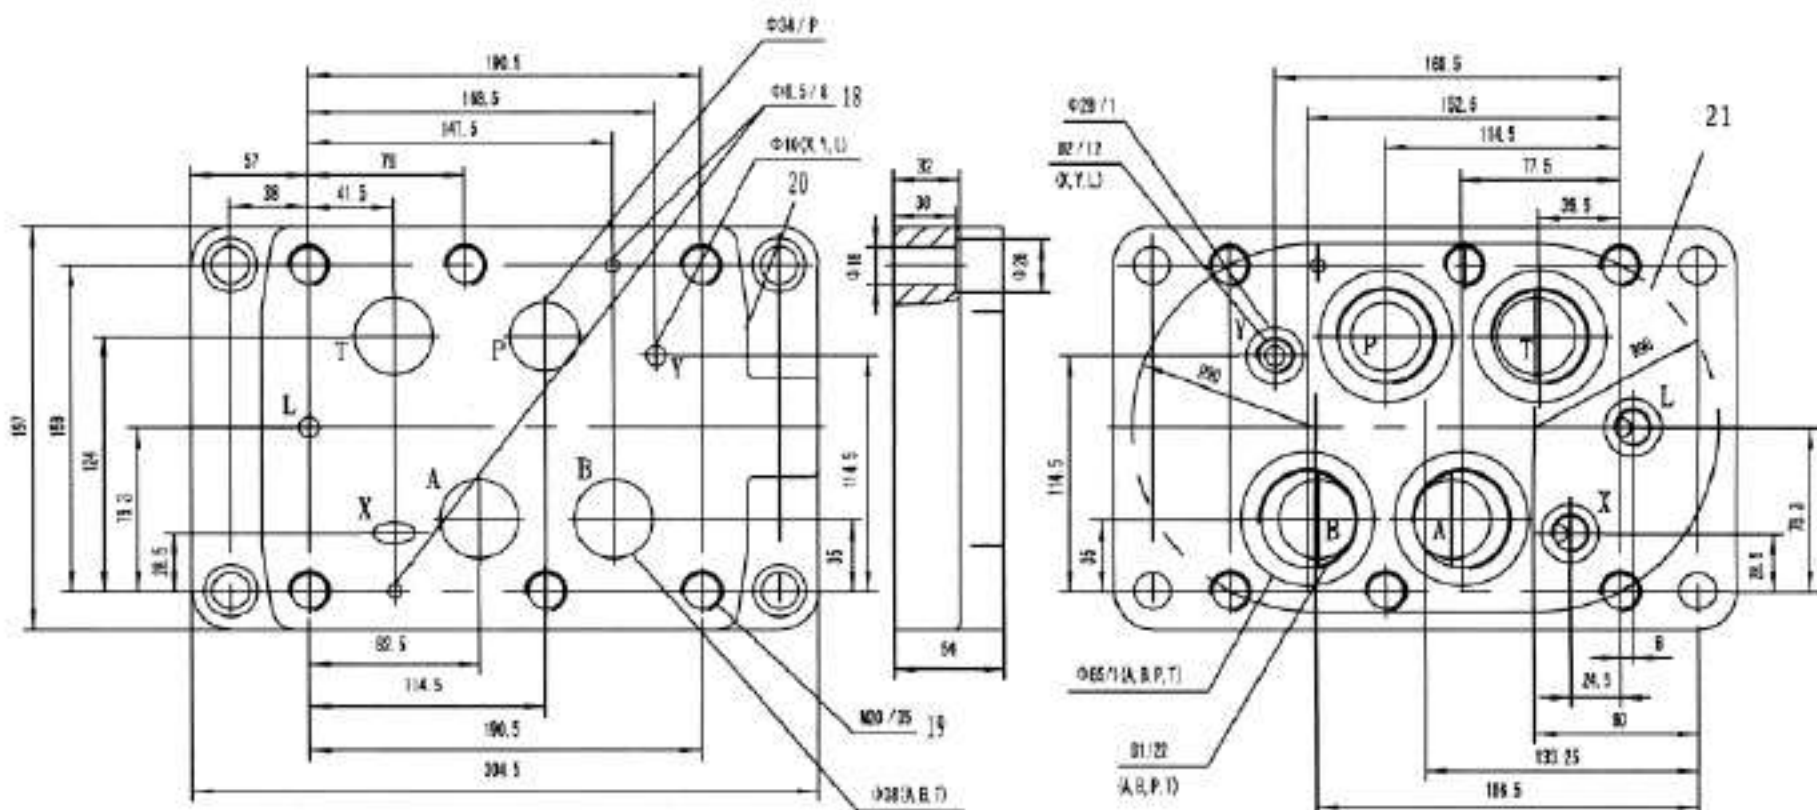

"L" only used on valves which are pressure-centred


Type	Weight	D1	D2	Valve fixing screws	Tightening torque for screws
G157/01	18kg	G1 1/2"	G3/2"	6 - M12x60-10.9 (GB/T70.1-2000)	105Nm
G157/02		M48x2	M18x1.5		

18 locating pin 19 Valve fixing screws 20 mating piece of valve 21 Front panel cut-out

Subplates

G158/10 flange connection

(Dimensions in mm)

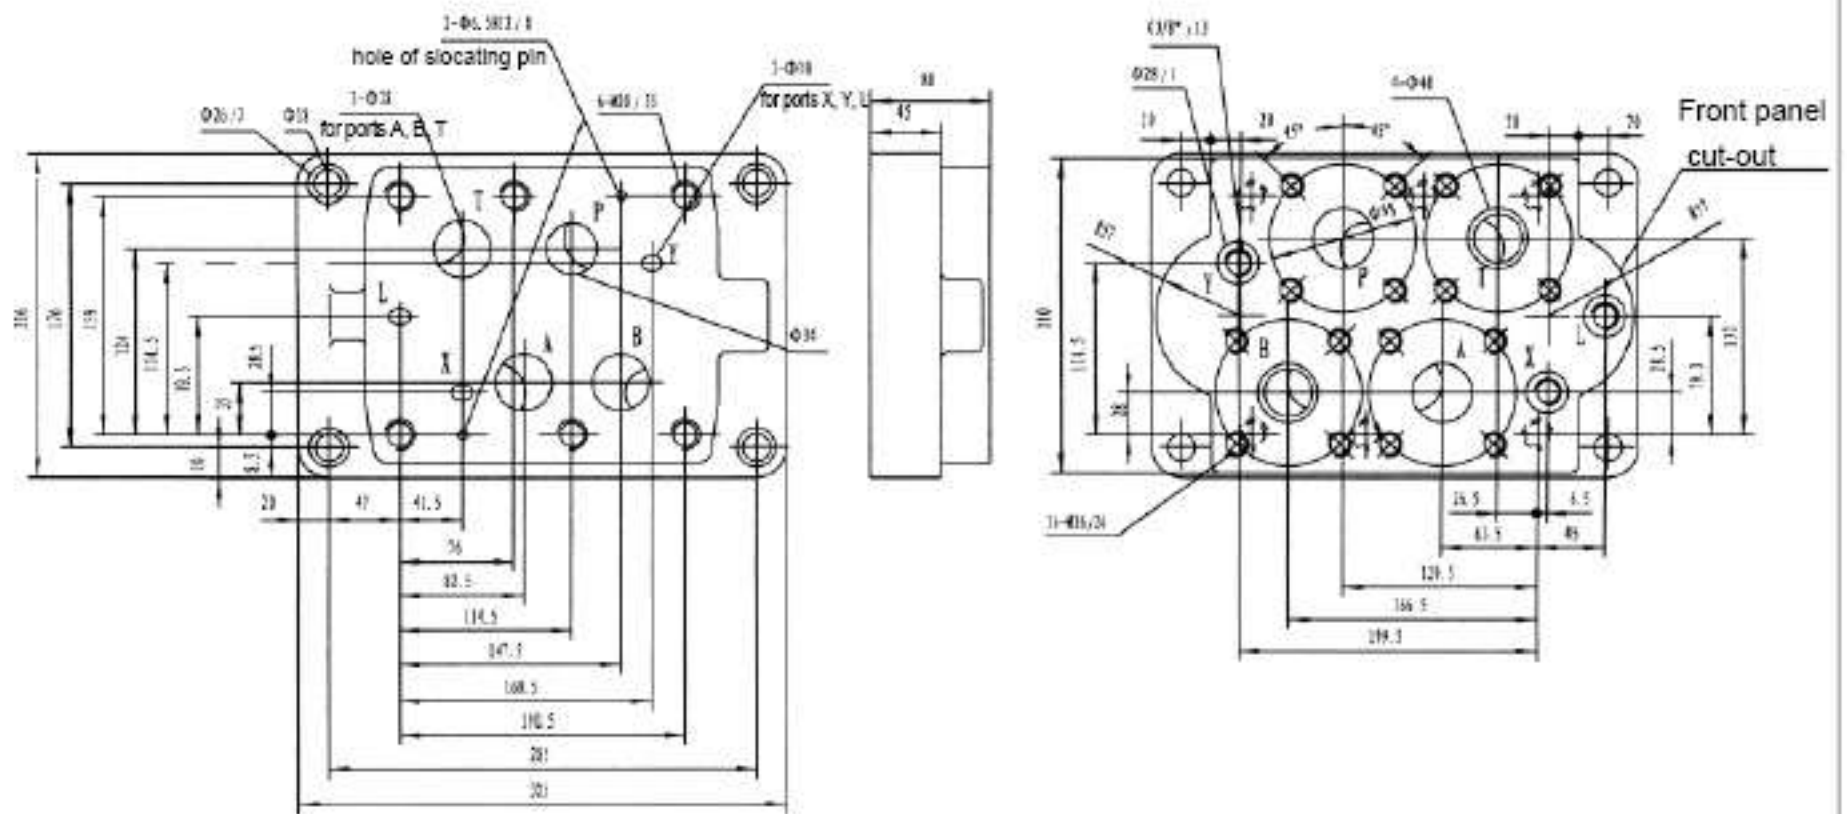

"L" only used on valves which are pressure-centred


Type	Pressure	Type	Weight	Valve fixing screws	Tightening torque for screws
G158/10	165MPa	303 901	approx. 30.5kg	6 - M20 × 80 -10.9 (GB/T70.1-2000), Should be ordered separately.	580N.m
	to 25MPa	303 902			
	to 40MPa	303 903			

Subplates

For applications outside these parameters, please consult us!

G115/01 (G1/4") G115/02 (M14x1.5)


(Dimensions in mm)

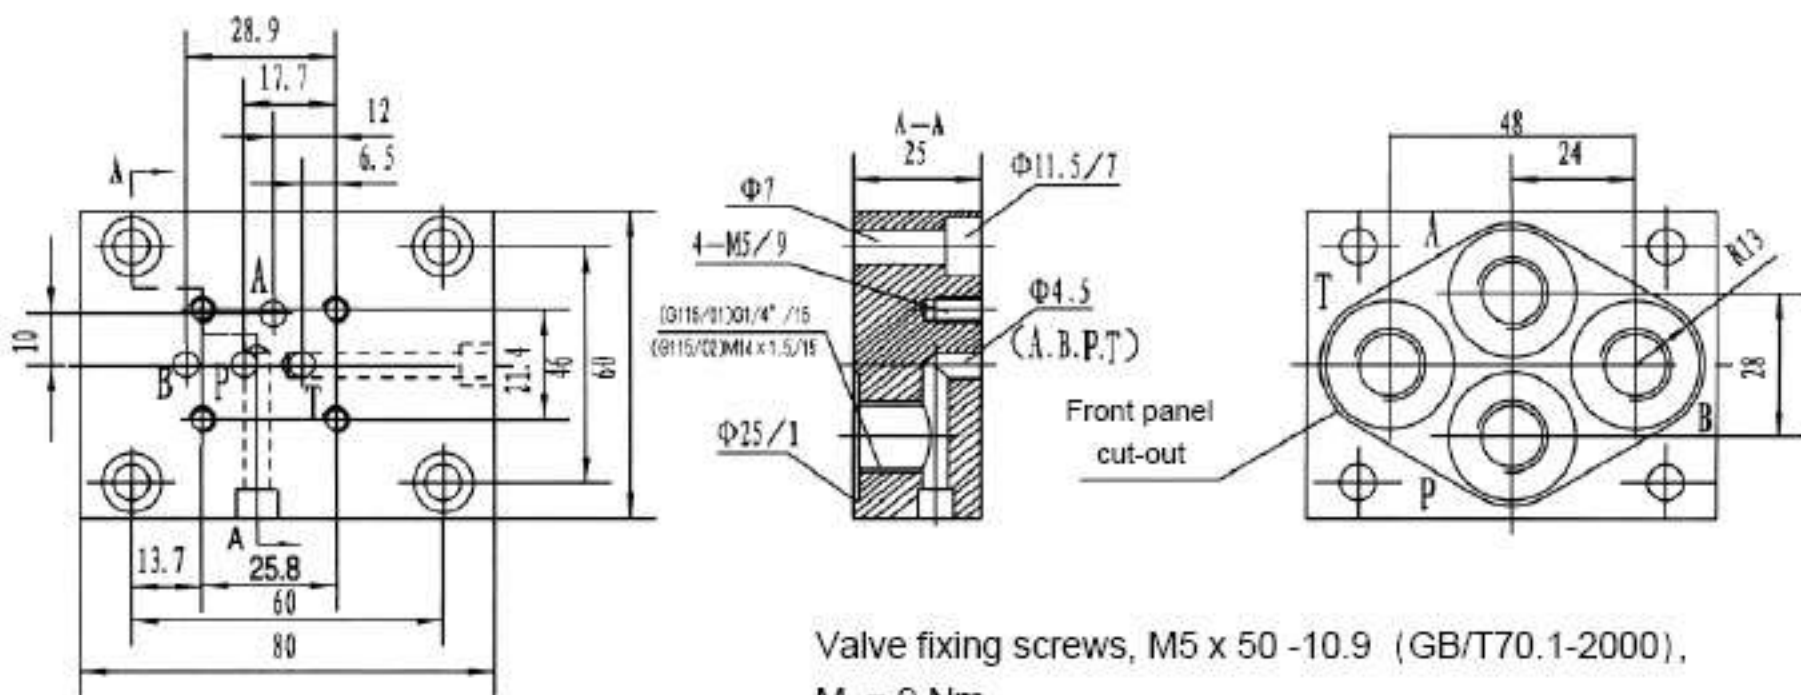

Valve fixing screws, M5 x 50 -10.9 (GB/T70.1-2000),
 $M_A = 9 \text{ Nm}$

G96/01 (G1/4") G96/02 (M14x1.5)


(Dimensions in mm)

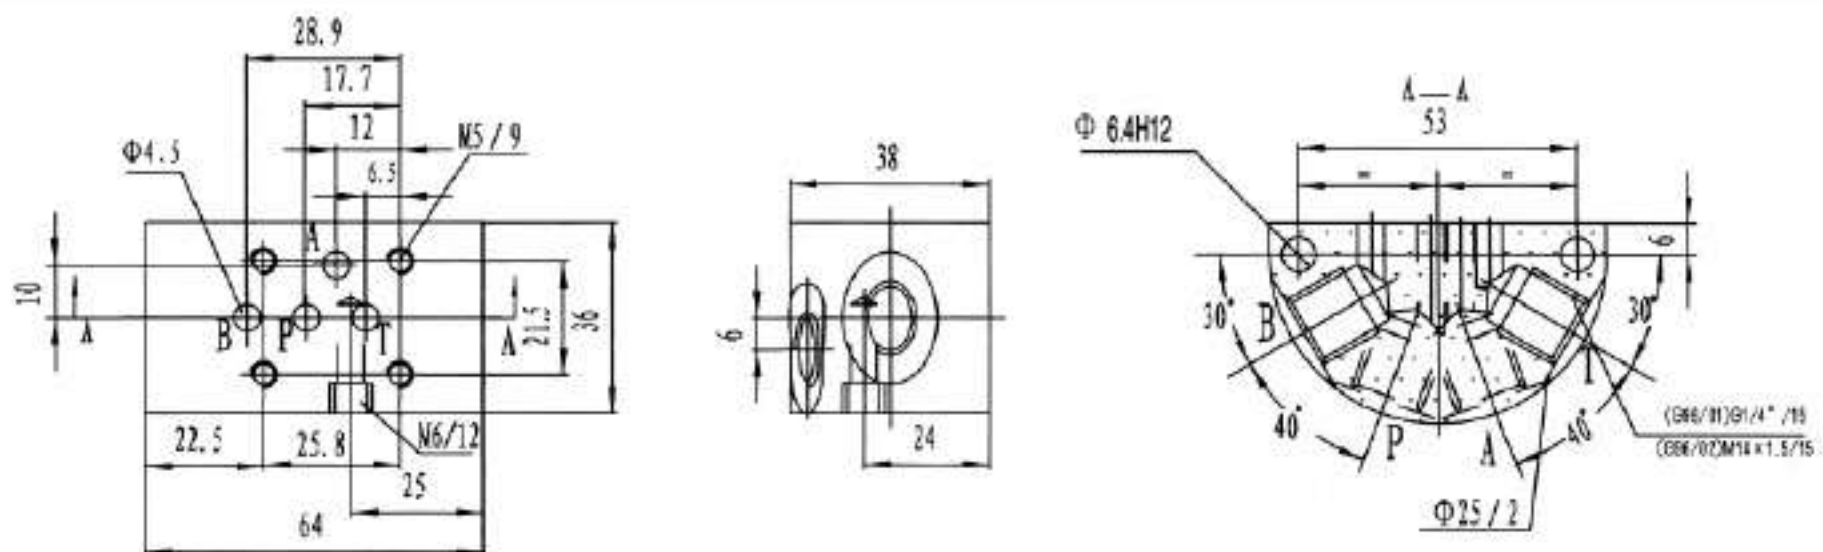

Valve fixing screws, M5 x 50 -10.9 (GB/T70.1-2000),
 $M_A = 9 \text{ Nm}$

G647/01 (G1/4") G647/02 (M14x1.5)

(Dimensions in mm)

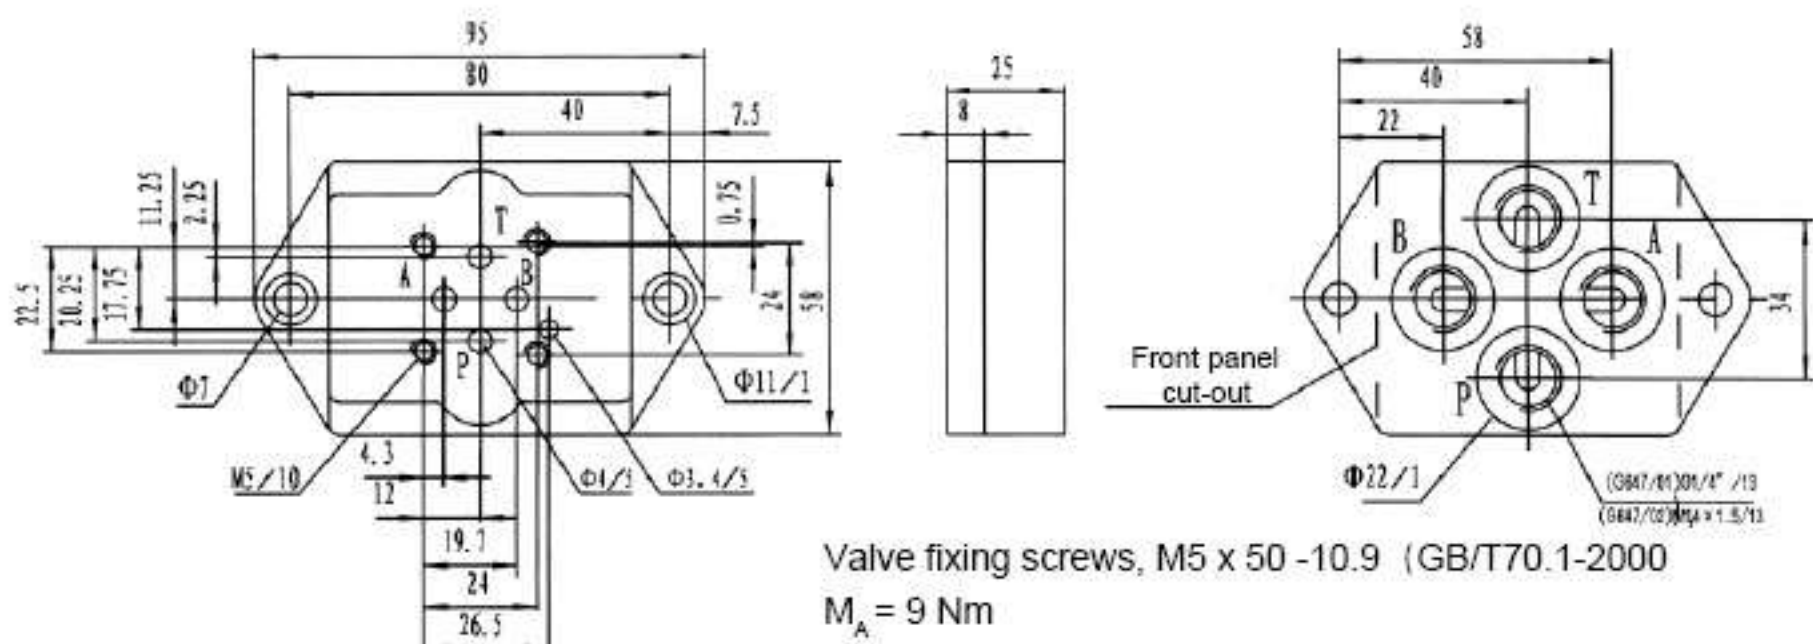

Valve fixing screws, M5 x 50 -10.9 (GB/T70.1-2000)
 $M_A = 9 \text{ Nm}$



 **Tel: 400-000-6987**

Our company has passed:

- ISO9001 Quality Managing System Certificate
- ISO14001 Environment Managing System Certificate
- OH SAS18001 Occupational Health Safety Managing System Certificate
- CE Certificate

Compiled by Huade Hydraulic Technical Center

 **Huade**

BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO., LTD.

Compiled in Oct.2012